SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyrighted, 1890, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXIII.—No. 10. ESTABLISHED 1845. NEW YORK, SEPTEMBER 6, 1890. $3.00 A YEAR. WEEKLY.

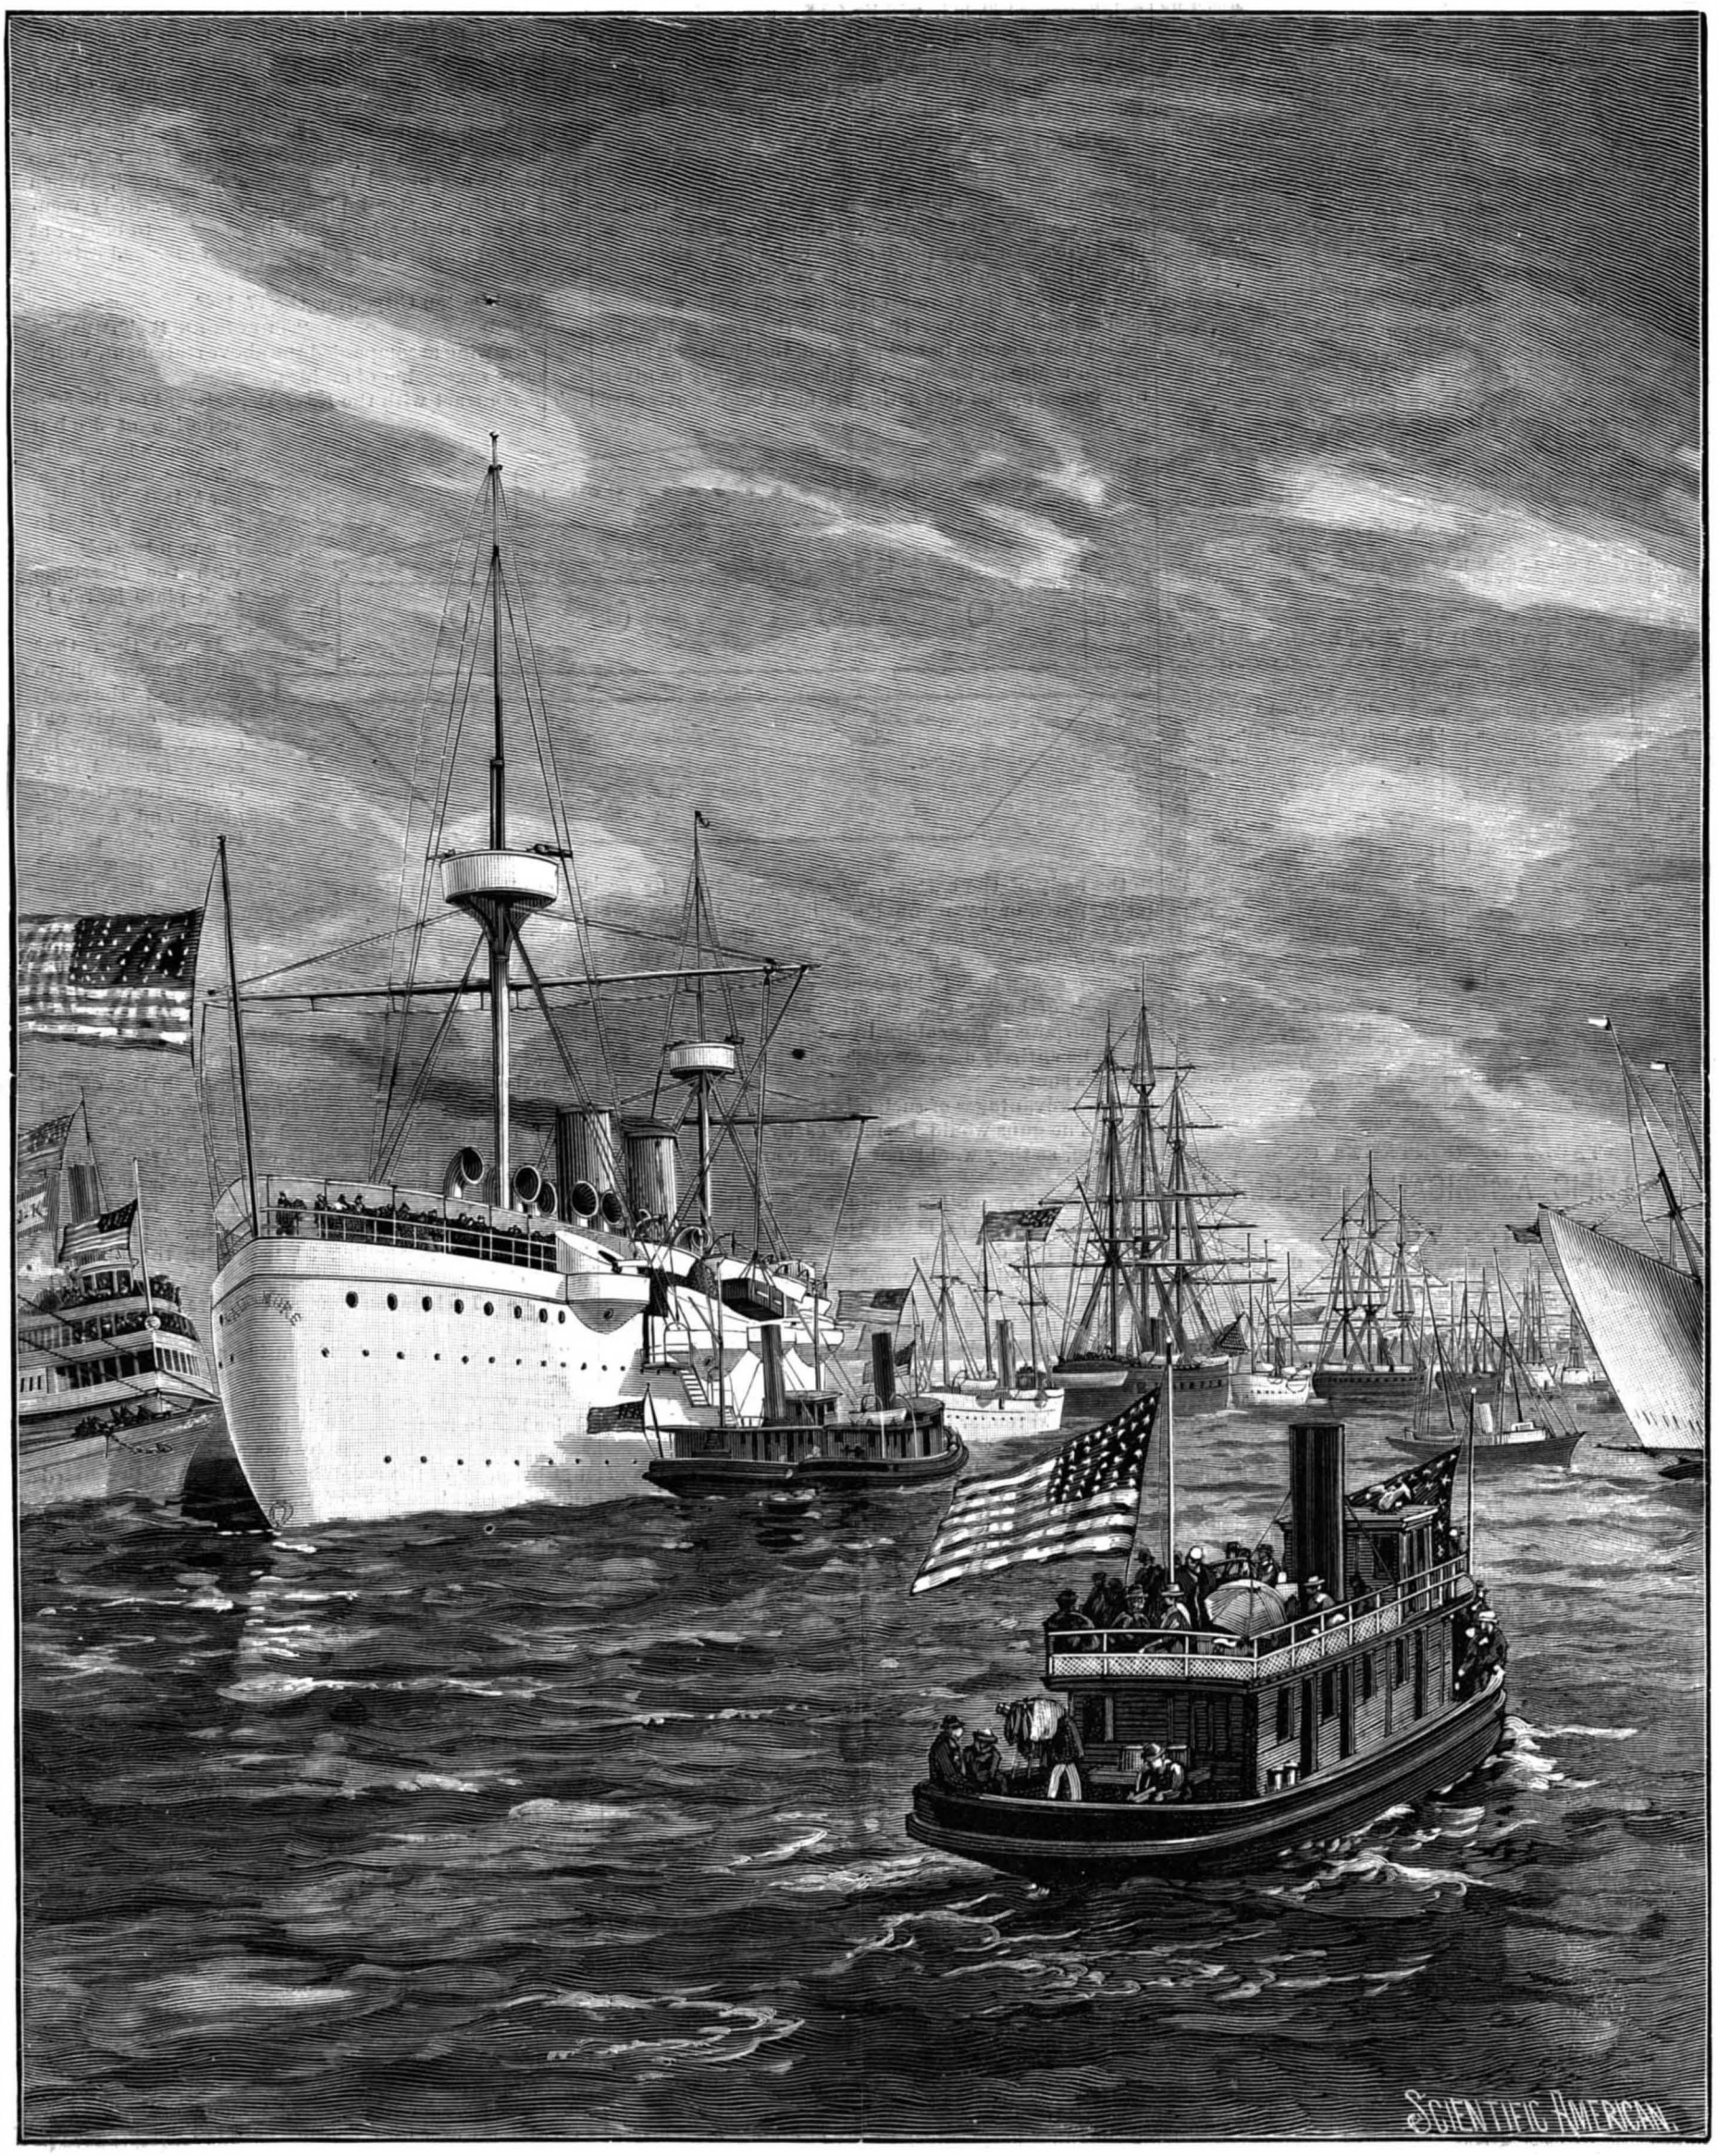

THE U. S. WAR SHIP BALTIMORE RECEIVING THE REMAINS OF ERICSSON.—[See page 148.]

© 1890 SCIENTIFIC AMERICAN, INC.

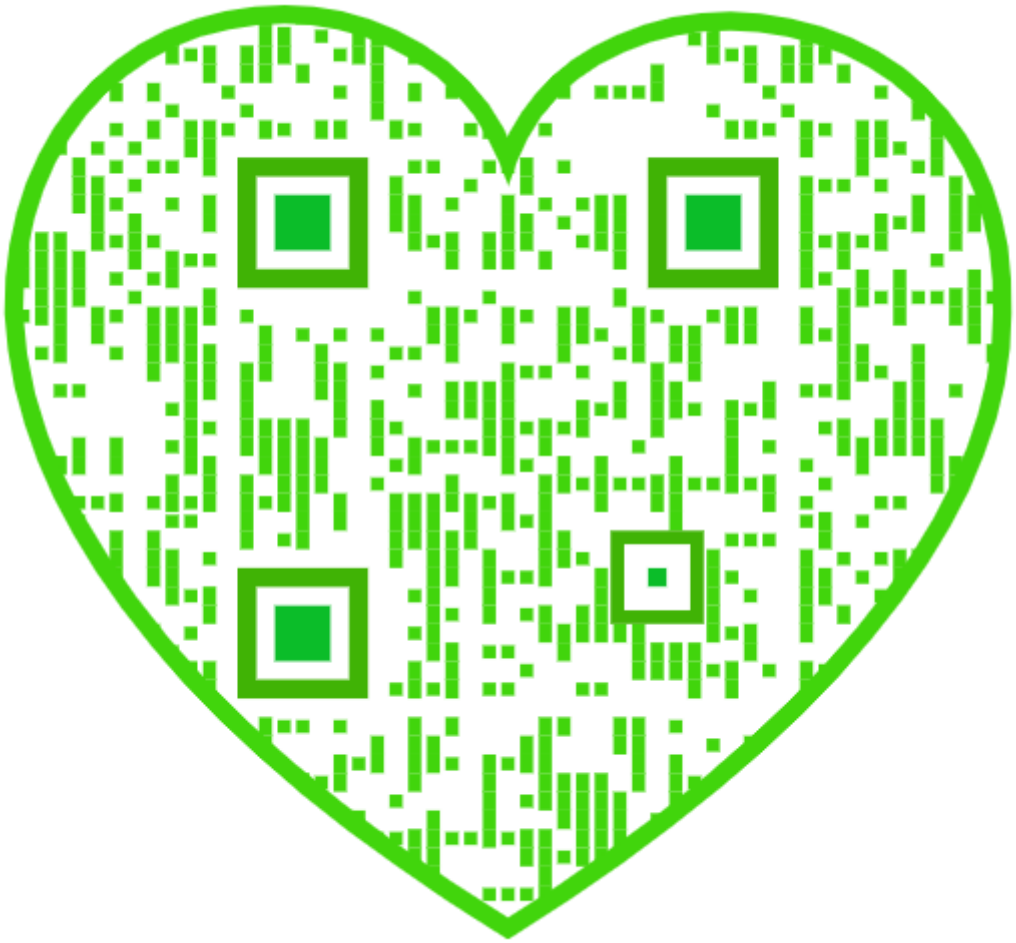

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico..... .....**$3 00**
One copy, six months, for the U. S., Canada or Mexico. **1 50**
One copy, one year, to any foreign country belonging to Postal Union. **4 00**
Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, for U. S., Canada or Mexico. $6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughcut the country. See prospectus last page.

Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to any address in U. S., Canada or Mexico, on receipt of *seven dollars*. To foreign countries within Postal Union, *nine dollars a year*.

Building Edition.

THE ARCHITECTS AND BUILDERS EDITION OF THE SCIENTIFIC AMERICAN is a large and splendid illustrated periodical, issued monthly, containing floor plans, perspective views, and sheets of constructive details, pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.

Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, $2.50 a year. To foreign Postal Union countries, $3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, $5.00 a year; combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, $9.00 a year. To foreign countries, $11.50 a year.

Spanish Edition of the Scientific American.

LA AMERICA CIENTIFICA E INDUSTRIAL (Spanish trade edition of the SCIENTIFIC AMERICAN) is published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number of *La America* is profusely illustrated. It is the finest scientific, industrial trade paper printed in the Spanish language. It circulates throughout Cuba, the West Indies, Mexico, Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. $3.00 a year, post paid to any part of the world. Single copies 25 cents. See prospectus.

MUNN & CO., Publishers,
361 Broadway, New York.

☞ The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.

NEW YORK, SATURDAY, SEPTEMBER 6, 1890.

Contents.

(Illustrated articles are marked with an asterisk.)

African experiences of Surgeon Parke..... 146
American Association, Indianapolis meeting..... 148
Baltimore, departure of the, for Sweden..... 148
Boat, the fastest, in the world... 148
Bob sled, Yenne's*..... 153
Buoy, a luminous..... 154
Business and personal..... 155
Caving machines, Potter's table for*..... 146
Cements of rubber and gutta-percha.... 152
Combustion, spontaneous, of hay..... 153
Cruiser San Francisco, the 153
Ear and bail for vessels, Hicks'* 146
Electric launches..... 154
Electric racecourse at Nice*.....151
Electricians, amateur, work of.. 149
Ericsson obsequies—scene in N. Y. harbor 143
Gas, natural, remarkable phenomena of, in Indiana..... 145
Glass bottles, cutting..... 149
Hop industry, the English..... 149
Horse, a mechanical*.... 151
Idiot, relief of the..... 146
Inventions, recently patented.. 155
Life boat, a jet-propelled*..... 150
Light, elec., in Suez canal 149
Machinery, American, on the Danube..... 152
Manufactures, growth of.... 147
Mountain, a terraced..... 154
Neck, a broken, mended..... 146
Niagara Falls water power scheme, the..... 154
Nutmeg grater, Maxon's*..... 153
Patents granted, weekly record of..... 155
Peters, Prof. C. H. F.*..... 150
Photography-eikonogen formula, celluloid negatives..... 152
Railroad tie, Taylor's*..... 147
Railway ties, steel..... 153
Ship, war, Ericsson's revolving turrent*. 144
Spindle, separable, Bailey's*..... 146
State house, new, at Indianapolis*143
Switch worker, Heitmeyer's*.. .. 153
Telegraph key, Van Deusen's*..... 146
Telegraph, old facts about the.. 153
Trees in the United States..... 145
Tube expander, Benade's*..... 147
Typewriter copyholder, Pipes and Pernot's*..... ... 147
Tyrotoxicon 145
Wrench, Kasch's*..... 147

TABLE OF CONTENTS OF

SCIENTIFIC AMERICAN SUPPLEMENT

No. 766.

For the Week Ending September 6, 1890.

Price 10 cents. For sale by all newsdealers.

PAGE

I. BIOLOGY.—The Role of the Microbe.—By A. R. SMART.—Some difficulties in the germ theory of diseases described, and the limits of the applicability of bacterial investigation of the present day.. 12241

II. CHEMISTRY.—Tanning Analysis.—By Dr. BUTER.—The commercial analysis of bark and extracts as conducted in Paris.—3 illustrations 12244

III. CIVIL ENGINEERING.—Paris Central Pneumatic Power Stations.—An exhaust air system of distributing power.—2 illustrations..... 12235
The Belleville Cable Railway.—A cable railway recently constructed in Paris.—Full particulars of its construction.—3 illustrations..... 12231
The Sault Ste. Marie Canal.—The connecting link between Lake Superior and Lake Huron.—Its international importance.—1 illustration.... 12231

IV. ELECTRICITY.—Connecting Lightning Conductors to Gas and Water Pipes.—A plea in favor of the old construction of lightning conductors, in face of the researches of Prof. Lodge..... 12236
Electrolysis of Different Substances.—By P. L. ASLANOGLOU.—Some simple experiments in electrolysis described.—3 illustrations..... 12237
The Electrolysis of Metallic Phosphates in Acid Solution.—By EDGAR F. SMITH.—An interesting research in electro-chemistry.. 12236

V. MATHEMATICS.—New Method of Extracting Cube Root.—By Prof. H. A. WOOD.—A very simplified method of extracting the cube root for use in arithmetic and algebra..... 12243

VI. MEDICAL AND HYGIENE.—Improved Ophthalmic Refractometer.—An apparatus for determining the exact condition of the human eye as regards its powers of vision.—5 illustrations..... 12240
Medicinal Soaps.—Leading medicinal soaps now on the market and their qualities..... 12240
Seborrhœa and Baldness.—An annoying disease affecting the hair, and its treatment 12241

VII. MUSIC.—Music Transposition.—An interesting letter on the subject of transposition of airs..... 12244

VIII. NAVAL ENGINEERING.—The Amiral Baudin.—Particulars of this formidable ship, one type of a first class French ironclad.—5 illustrations 12234

IX. GUNNERY AND ORDNANCE.—Fabrication of Twelve Inch Mortars.—By A. A. FULLER and F. M. CONNET.—Elaborate description of the manufacture of heavy mortars in America.—3 illustrations..... 12232

X. PHOTOGRAPHY.—Magic Photographs.—The mysterious photograph.—A few interesting examples of magic photography.—4 illustrations..... 12236

XI. PHYSICS.—An Improved Wave Apparatus.—By JOHN T. STODDARD.—An ingenious apparatus for illustrating the combination of two simple sound waves.—2 illustrations..... 12242
Color and Coloring.—By Prof. A. H. CHURCH.—The first of a series of lectures on color giving the most advanced views and theories.—1 illustration..... 12237
The Gramophone.—A talking machine involving a different principle than that utilized in the phonograph.—4 illustrations..... 12243

XII. TECHNOLOGY.—Competition between the Leblanc and the Solway Soda Processes.—The great increase in the adoption of the Solway soda process in Europe..... 12244
Everyday Work in the Rubber Factory.—Practical notes on rubber moulds and on white and colored rubber..... 12234
The Chlorine Industry.—A new process for making chlorine by the utilization of oxychloride of magnesia.—3 illustrations..... 12245
The Sulphuring of Dried Fruit.—By Prof. HILGARD.—The advantages and disadvantages of treating dried fruit with sulphurous acid..... 12246

ERICSSON'S REVOLVING TURRETED WAR SHIP.

Nearly fifty years ago a young man named Theodore R. Timby, hailing from the village of Cato, Cayuga County, N. Y., filed in the Patent Office a caveat for what he termed a revolving metallic fort. Doubtless he thought the device was new, but it was in fact a very old idea, substantially the same thing having been described in 1805 in the *Nautical Chronicle*. A similar invention was also made about that time, or perhaps sooner, by Abraham Bloodgood of New York. Indeed, it seems probable that the ideas given in the *Nautical Chronicle* were derived from Bloodgood.

In the Transactions of the Society for the Promotion of Useful Arts in New York State, published in 1807, vol. 2, pages 230, 231, will be found a description and an engraving of Bloodgood's invention. This work may be found in the Patent Office library at Washington. We give from it the following description of Bloodgood's invention:

"A FLOATING BATTERY ON A NEW CONSTRUCTION.

"By the late Abraham Bloodgood.

"The model of this battery was exhibited to the society; with a verbal description only. The annexed plate shows an exact profile view of its body, the shape of which, as seen from above, is circular. It is to be connected at the center of its bottom with a strong keel, in such a manner that while the keel is held by cables and anchors in one position, the battery is made to turn round on its center. This motion may be given to it either by the tide acting on float boards, attached

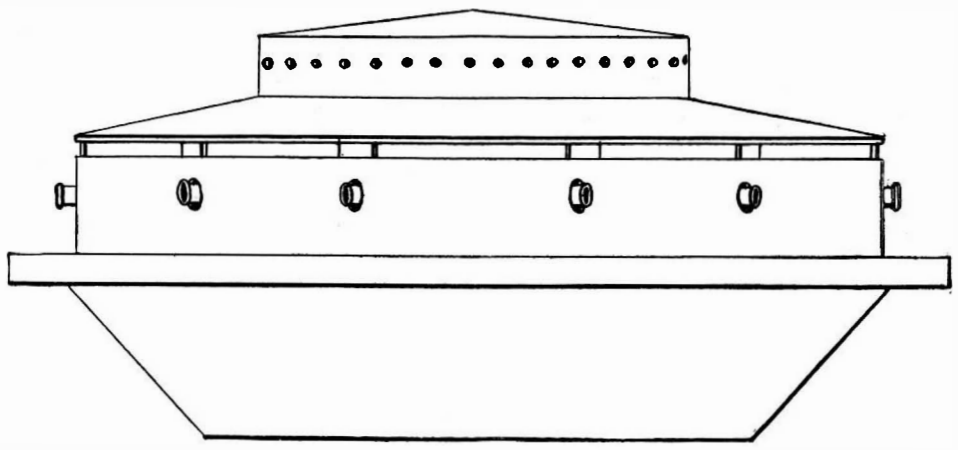

to the body of the battery, by sails raised on its exterior parts, or by manual application. In this last way it may be effected by men in the hold, drawing on a lever fastened to a post fixed to the keel, and rising through a well-hole in the center of the battery. The strength of horses might perhaps be applied to the same purpose. The cables by which the keel is held are to be entirely under water and thus secure from an enemy's shot.

"The advantages of such a battery would be—

"1. The guns would be more easily worked than is common, as they would not require any lateral movement.

"2. Its rotary motion would bring all its cannon to bear successively, as fast as they could be loaded, on objects in any direction.

"3. Its circular form would cause every shot that might strike it, not near the center, to glance.

"4. Its motion, as well as its want of parts on which grapplings might be fastened, would render boarding almost impossible.

"5. The steadiness with which it would lay on the water would render its fire more certain than that of a ship.

"6. The men would be completely sheltered from the fire of the elevated parts of an enemy's ship.

"7. The battery might be made so strong as to be impenetrable to cannon shot."

In 1812 Colonel John Stevens, of New Jersey, proposed to construct an ironclad floating battery, which was identical in all its leading features with the circular battery. This odd craft was intended for harbor defense. It was to be a saucer-shaped vessel with a bomb-proof deck, and armed with a number of the heaviest guns. It was anchored by a swivel at its center, about which it was to be rapidly turned by a set of submerged screws driven by a steam engine. As each gun during its revolution came into the line of fire, it was discharged, and was reloaded before the completion of another revolution brought it into line again. The plan evidently resembled somewhat the Monitor in principle. This was probably the first ironclad of which plans were ever prepared.

January 18, 1843, Timby filed his caveat, which reads as follows, as certified by the Patent Office:

"*To the Commissioner of Patents:*

"The petition of Theodore R. Timby, of Cato, County of Cayuga and State of New York, respectfully represents:

"That I have made an improvement which I call a metallick revolving fort and am now engaged in maturing the same preparatory to my applying for Letters Patent, therefor I do therefore pray that the subjoined description of my invention may be filed as a caveat in the confidential archives of the Patent Office agreeably to the provisions of the act of Congress in that case made and provided, I having paid twenty dollars into the Treasury of the United States and otherwise complied with the requirements of the said act."

A description of the above improvement is as follows:

"My fort, when completed, will form a circle leving about two-third of its diametor from near the bottom of the fort is open space, the first deck being near the bottom upon this deck, and at the extremity of the open space alluded to are placed two propelling figures, one opisit to the other. When used on the land thes engines act upon a shaft, each which are connected or made fast to the deck mentioned; upon these shafts each is a flanged wheel resting upon a circler railway track underneath and otherwise independent of the fort. Above the deck mentioned are several others, each a proper distance above the other and each forming a circle within the bulwarks of the fort, and upon the decks are placed the cannon when used. When used on the watter I place the fort, as allredy mentioned, on a circler hull with the anchor to be cast at center and watter wheels in the place of flanged driving wheels.

"Washington City, Jan. the 17, 1843.

(Signed) "THEODORE R. TIMBY."

No drawing accompanied the above statement, which is a mere suggestion of an idea.

The contract with the Navy Department for the construction of John Ericsson's first monitor was dated October 5, 1861. Her first memorable battle in Hampton Roads with the Merrimac took place March 9, 1862.

It was then that Timby seems to have woke up to the recollection of his old caveat, and now he comes forward as a claimant as the original and first inventor. The official records show that he applied for a patent May 27, 1862, and that it was rejected June 13, 1862, on the ground that the application presented no novelty, the references cited being English patent No. 715, granted in 1858 to Minton and Thomas, also Coles English patent No. 778, granted in 1859. Both of these patents show revolving metallic fortresses, and with all the appurtenances for construction and operation drawn in full detail.

Furthermore, Timby was, according to the official records, referred to the revolving battery of Bloodgood above mentioned, as described in the Transactions of the Society for the Promotion of Useful Arts. Timby then asked to have the rejection set aside in view of his caveat of 1843, and strange to say his request was complied with by the Patent Office, and a patent was issued to him September 30, 1862, with the following broad claim:

"What I claim as new and desire to secure by Letters Patent is,

"A revolving tower for defensive and offensive warfare, whether placed on land or water."

This was clearly a bogus patent, because the Patent Office had in its possession at the time of the issue the clearest evidence that Timby was not the original and first inventor of the revolving tower, as he pretended and claimed. The issue of the patent was an error on the part of the Patent Office, and there are reasons for the presumption that it was brought about by a combination of official and non-official trickery, and that, by means of the fraudulent document thus obtained, the Treasury of the United States and probably the pockets of certain private individuals were depleted of considerable money.

Be that as it may, from the date of the fraudulent patent to the present time, Timby has posed as the original inventor of the Monitor, and has endeavored, with some success it must be admitted, to make the public believe that he was in truth the original Jacobs.

In the ninth volume of the *American Cyclopædia*, published in 1874, is an article by General James Harrison Wilson, upon the subject of ironclad ships, in which, among other vessels, a description is given of Ericsson's original Monitor, being the first vessel ever constructed carrying an iron revolving tower upon its decks. We quote from the article:

"The plan upon which she was built is known as the turreted or monitor system, and was invented by Theodore R. Timby, of Dutchess Co., New York. On January 18, 1843, he filed his first caveat for the invention in the United States Patent Office. His specifications were for a revolving metallic tower and for a revolving tower for a floating battery to be propelled by steam. . . . . His patents covered the broad

© 1890 SCIENTIFIC AMERICAN, INC.

claim for a revolving tower for offensive and defensive warfare, whether used on land or water. When therefore the monitors were to be built, the constructors at once recognized the validity of his claim, and paid him a liberal sum for the right to use his invention."

Perhaps in the next edition of the Cyclopædia the editor will take occasion to correct the foregoing and give the true history of the invention.

The long and short of the whole matter appears to be this: Captain Ericsson was the first to design and construct a war vessel carrying an armored revolving tower or turret; and he was unquestionably entitled to all the honors and emoluments that pertained to that great production of his genius.

TYROTOXICON.

A number of cases of poisoning from eating ice cream have recently occurred. On June 30 some forty people in the neighborhood of Third Avenue and Seventy-fifth Street, New York, were poisoned in this way, the cream having been purchased of a confectioner in the neighborhood. A few weeks previous to this, a man was poisoned by cream partaken of at a saloon in New York. He was confined in St. Vincent's Hospital for several weeks, and has since instituted a suit against the proprietor of the establishment where the cream was purchased. On August 18, some twenty-five guests at Hotel Berwick, Narragansett Pier, were poisoned from eating ice cream, and a number of them were reported to have been very seriously ill. Cases of poisoning from eating cheese and drinking milk have also been of sufficiently frequent occurrence to stimulate inquiry and experiment regarding their true cause. Among the most successful of these investigators have been Doctor Victor C. Vaughan and Doctor Frederick G. Novy, of the University of Michigan, who have made an exhaustive study of the nature of poisons which are introduced into the human body from without, and those which are generated within the body. They have recorded the results of their investigations and experiments in a volume entitled "Ptomaines and Leucomaines," in which is also given the results of the labors of other eminent chemists in the same field. Vaughan and Novy succeeded after a series of most interesting experiments in isolating tyrotoxicon, and have cited a number of cases where it has been found in poisonous cheese, ice cream, and milk. Tyrotoxicon, however, is but one of a number of basic poisons which these scientists have designated as ptomaines, and in order to convey a comprehensive idea of the place assigned to tyrotoxicon, as well as ptomaines in general, in the chemistry of putrefaction, the following definition by Vaughan and Novy is given:

"A ptomaine is a chemical compound which is basic in character, and which is formed during the putrefaction of organic matter. On account of their basic properties, in which they resemble the vegetable alkaloids, ptomaines may be called putrefactive alkaloids. All putrefaction is due to the action of bacteria, and ptomaines result from the growth of these micro-organisms, the kind of ptomaine formed depending upon the individual bacterium engaged in its production, the nature of the material being acted upon by the bacterium, and the conditions under which the putrefaction goes on, such as the temperature, amount of oxygen present, the electrical conditions existing, and the duration of the process. Different ptomaines will be formed in decomposing matter freely exposed to the air and in that which is buried beneath the soil or from which the air is largely excluded. Even when the same ferment is present, the product of the putrefaction will vary, within certain limits, according to the extent to which the putrefying material is supplied with air.

"The kind of ptomaine found in a given substance will depend also upon the stage of putrefaction. Ptomaines are transition products in the process of putrefaction. They are temporary forms through which matter passes while it is being transformed by the activity of bacterial life from the organic to the inorganic state. Complex organic substances, as muscle and brain, are broken up into less complex molecules, and so the process of chemical division goes on until the simple and well known final products, carbonic acid gas, ammonia, and water, result; but the variety of combination into which an individual atom of carbon may enter during this long series of changes is almost unlimited, and with each change in combination there is more or less change in nature. In one combination the atom of carbon may exist as a constituent of a highly poisonous substance, while the next combination into which it enters may be wholly inert."

The case of ice cream poisoning which is cited above as occurring in New York on June 30 was thoroughly examined by the New York Board of Health, and Dr. Martin, the chemist of the board, made an analysis of a sample of the cream; but while the symptoms of those who suffered ill effects from eating the cream all pointed to poisoning by tyrotoxicon, it was not found in the sample submitted for test. The failure to find tyrotoxicon in this case may be due to the fact that this poison is present under certain conditions and not present under others.

Doctors Vaughan and Novy found tyrotoxicon in ice cream which made many persons sick at Lawton, Michigan. Vanilla had been used in flavoring, and it was at first thought that this was the cause of the sickness, and a similar error has been made in other cases of ice cream poisoning. Each of the gentlemen took twenty drops of the vanilla extract, and one of them took two teaspoonfuls more without results, which clearly proves the non-poisonous nature of the vanilla. It was found that the portion of the custard which had proved to be poisonous was allowed to stand for some hours in an old building which was surrounded by shade, had no underpinning, and the sills of which had settled into the ground. There were no eaves troughs, and all the water falling from the roof ran under the building, the streets on two sides having been raised since the building was erected. The building had been unoccupied for a number of months, without ventilation, and the back end, where the cream had been frozen, was previously used as a meat market. The symptoms of the persons poisoned were severe vomiting and purging, griping of the stomach and abdomen, with headache and backache. The tyrotoxicon obtained from this cream was administered to a kitten about two months old, and in ten minutes it began to retch and soon vomited, and was unable to retain food upon its stomach.

It seems clear from the statement just made that the cream absorbed the putrefactive elements from the old and unsanitary building in which it was made, and other cases of ice cream poisoning can be traced to similar causes. The cream which poisoned forty people in New York on June 30 stood in a cellar two days without freezing, which was ample time for putrefactive germs to enter into its composition. The copper found in the sample of cream by the New York Board of Health was not sufficient to cause the poisoning, neither was there any other poisonous element discovered. The further tests regarding poisoning by tyrotoxicon made by Vaughan and Novy are most interesting, and the facts they elicited and recorded should be better understood than they are. Not only are laymen generally in ignorance of these important discoveries, but many physicians are yet unfamiliar with them.

Natural Gas Phenomenon in Indiana.

On August 11, at 9 o'clock A. M., the farmers near Waldron, which is eight miles southeast of Shelbyville, Ind., were startled by a terrific explosion. When they reached the Ogden graveyard, which is on a bluff near the Flat Rock stream, they discovered that fully ten acres of the earth was in commotion. Geysers were shooting up to the height of six and eight feet, and gas was blazing from ten to fifteen feet above the water of the geysers. The river bed was torn up and the water had stopped running below the graveyard. Flames are still shooting from fifty different fissures in the earth.

The county had not been considered in the gasbelt, although local companies have sunk many wells. At Waldron a sufficient flow of gas was found to supply the citizens with fuel. Nobody thought that a gusher was slumbering near the town, and few have entertained the idea of permanent flow of gas in this locality. A little stream known as Flat Rock runs southwesterly through the county, and about three miles south of Waldron, on the banks of Flat Rock, is a sort of butte upon which a country graveyard has been in use for many years. The river at this point runs west, and Conn's Creek empties into it from the north, forming a kind of horseshoe-shaped strip of land opposite the graveyard. Edmund Cooper owns the land on the north side of the river, and it was in this strip that the explosion occurred.

J. H. Lowe, who lives on the Cooper farm, heard a terrific report, and felt the earth quivering beneath his feet. He went toward the graveyard, and was soon confronted by a sheet of flame 200 feet high.

Then fifty or more fountains of fire burst from the earth. These were interspersed with six or eight active geysers. At the east side of the eruption a large stack of straw was in flames, and a field of green corn was drooping before the excessive heat from the ten acres of flame. The river bed was torn to pieces, and huge fissures were receiving the river's water. Sheets of flame swept over the water, and an area of about one acre was quickly converted into a huge hole, from which a continuous roaring and rumbling noise proceeds.

Within the bend of the river and for one-eighth of a mile along the stream great rents were seen in the earth and river bed. At the bend of the river, which is of limestone, is a fracture a quarter of a mile in length and stones the size of a house have been hurled from their places. The graveyard was shaken up, the skeletons of the dead being distinctly seen in the fractures of the earth. Gas flows freely from the entire surface of the ten acres.

It is said when the explosion occurred, rocks and trees were thrown 200 feet high.

A correspondent of the New York *Sun* who visited the locality the next day says: Birds, snakes, rabbits, and fish in profusion are dead, and the fish, thoroughly cooked, are thickly scattered through the waters.

A log fire was blazing on the ten acre tract when, without warning, the earth belched forth flame. Great rocks and trees were hurled skyward, a part of the adjoining graveyard was torn off and reduced to dust, and the waters of Flat Rock were converted into foam and steam. A vast pocket of natural gas under or near the log fire had exploded. The gas had accumulated apparently under the creek bed, held in by a thick stratum of bluish clay, and fed from the great depths below, whence the somewhat meager natural gas supply of Shelby county is obtained.

The explosion threw great volumes of the blue clay into the air, and left yawning caverns, some of them big enough to hold a house. Through the caverns and holes the gas continued to pour after the explosion. It blazed fiercely up above the trees. The gas escaped under such pressure that the flame was forced as high as the tree tops. The flames at times would rise 100 yards. This continued all of one afternoon and the same night.

On August 12, the fire had been extinguished, but the gas, under reduced pressure, still escaped. The gas is odorless, like the Pennsylvania natural gas.

The general conviction is that no other agency than gas could have produced the effect. Neighbors who saw the flying debris and heard the roaring noise say they thought for a moment that a tornado was doing the mischief, and many hurried with their children to places of shelter.

One of the marvelous results is the effect upon the water. Not a drop of Flat Rock's water has gone below the cavern since the upheaval. The great caverns have taken in the current, and a wild foaming Niagara is created on the edges of the abysses as the volume of gas comes in contact with the falling water.

At noon to-day the holes are about full of water and the creek begins to deepen with the back water. The water is even flowing up stream, but presently will doubtless cut a new channel and flow on its downward course.

Across the river from the Haban farm are fissures, and the explosion in its scope took in many more acres besides the ten where its damage was greatest. In these, every living thing apparently was killed, and the fish, if not killed outright, were cooked by the gas blazing on the river's surface. The water still boils to-day, but the fires are out.

The excitement over the natural gas explosion still prevailed on the third day, August 14, throughout the country, and thousands of people were flocking to the scene. It is now discovered that the soil for many miles around is impregnated with the combustible, and by piercing the soil with a stick or crowbar the gas may be ignited and a blaze produced large enough to cause considerable illumination. In Van Buren township, twenty-four miles north, the gas has broken into the water wells, and the use of water from them has been abandoned. Some of the farmers cased the wells, and are using the gas from them for fuel.

The whole neighborhood in the vicinity of the young volcano is saturated with natural gas and the soil is full of it.

This would indicate that the gas from the wells has found its way below the limestone, and in many places fractures in the stone permit it to escape into the sand and gravel immediately below the surface soil, which partially prevents its escape into the air. This bears out the theory that gas has for some time been escaping from the sides of the gas wells and diffusing itself in the sand and gravel below the limestone.

The whole township seems to be filled with the combustible and the inhabitants are threatened with disaster. No telling but the lighting of a match may blow two or three townships into smithereens. It is altogether probable that the diffusion of gas into the soil more or less affects the growing crops. The great question may yet be as to the advisability of sinking gas wells, or if sunk at all whether other methods should not be used to case and confine the explosive. Pockets of gas are no doubt forming beneath the limestone all over the region of the gas belt, and it is only a question of time when it will break forth in terrific force. It is yet a question as to which is the most hazardous, the accumulation of gas in pockets, followed by eruptions similar to the Waldron blowout, or permitting it to permeate the soil as it is now doing in Van Buren and Noble townships, poisoning the water and air. On August 14, boys were roasting corn by gas jets produced by sticking canes down in the soil a few feet near the volcano.

THE shipbuilding industry on the American lakes is active, and Cleveland claims to lead the way. Since January 1 the vessels built number 78 steamers, the gross tonnage being 63,922, and 18 barges and sailing ships of 15,315 tons. Last year the vessels built on the great lakes measured 107,080 tons.

© 1890 SCIENTIFIC AMERICAN, INC.

Relief of the Idiot.

Dr. Lannelongue, an eminent specialist in the Children's Hospital, Paris, has just succeeded in the effort to give intelligence to a poor little idiot. The child, a little girl four years old, had a deformed head, only about one-third the size of an ordinary little one of her age. She never smiled, never took notice of anything, and she could neither walk nor stand. The doctor became convinced that the condition of the little creature was due to the abnormal narrowness of the head, which hindered the natural growth of the brain. About the middle of May last he made a long and narrow incision in the center of the skull and cut a portion out of the left side of it, without injuring the "dura mater." The result of this operation was something astounding. In less than a month the child began to walk. Now she smiles, interests herself in everything around her, and plays with a doll. A tolerably bright little child has taken the place of the idiot.

AN IMPROVED TELEGRAPH KEY.

The accompanying illustration represents, in perspective view, a telegraph key provided with means for automatically closing the circuit as the operator releases the key, and for opening the circuit when the key is grasped by the thumb and finger. The cut shows the attachment as applied to a "Victor" key. It is a patented invention of Mr. John B. Van Deusen, of Saratoga Springs, N. Y. The key is of the ordinary construction, with base plate and standards in which the key lever is pivoted, while a leg, *e*, passing through the base plate and insulated therefrom, is provided with an anvil contact for opposing the contact of the key lever.

Under the head of the leg is a flat spring, *d*, curved rearwardly and upwardly, and slit at the ends to form arms at opposite sides of the key lever, a central arm contacting with the under surface of the key lever. A short distance in front of the trunnions of the key lever at *c* is pivoted a forwardly extending forked lever, *a*. The key knob is divided, its forward portion being attached directly to the end of the key lever in the usual way, and the rear portion, *b*, attached to

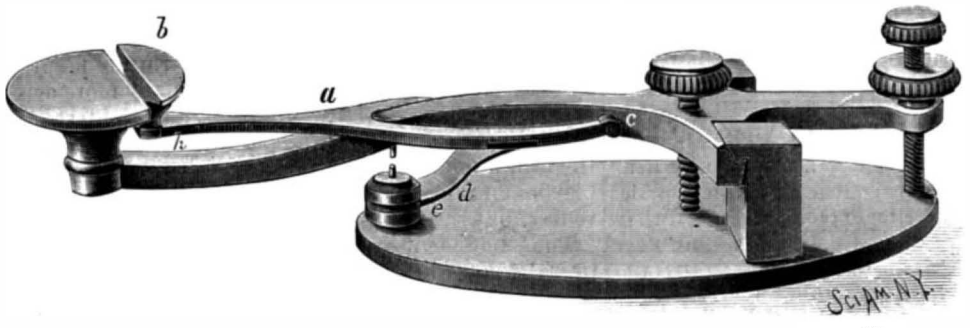

VAN DEUSEN'S TELEGRAPH KEY.

the forward end of the forked lever, each arm of which has a strip of insulating material resting on the side arms of the springs on each side of the key lever. The key is operated in the same way as an ordinary key, the circuit being opened and closed at the anvil contact points, but when the operator releases the key the forked lever is automatically lifted by the spring, as shown in the illustration, and the circuit is closed, a matter which the operator, through neglect or otherwise, often fails to attend to.

A WORK-HOLDING TABLE FOR CARVING MACHINES.

The table shown herewith, patented by Mr. Frank. R. Potter, is designed to support work of different lengths and widths, or work curved upward or downward, or to either side, without the use of "blocking up" blocks or plates, thereby saving time and facilitating the doing of the work in a more satisfactory manner. The illustration represents in perspective a wood-carving machine to which this work-holding table is applied, the upper figure being an end view of the table. The table is adapted for reciprocation on the bed of the machine, and is made with a support to which two screw shafts are held in boxes or bearings adjustable along the support, the shafts having adjustable work-clamping collars. The table is made with a supporting frame open at the center to give room for bent or curved work. In the application of the improvement, as represented, the carving bits or cutters are rotated by flexible shafts driven by an overhead shaft, pulley and gearing (not shown), the cutter head supporting the stylus and cutters being sustained from the machine frame by universally jointed links. This work holding table may, however, be used with any other style of carving or cutting machine, almost any shaped pieces of work of ordinary length being securely and quickly clamped by the screw shaft collars. For further information relative to this invention, address Mr. Allen E. Maynard, No. 540 East Twentieth Street, New York City.

AN IMPROVED CULINARY VESSEL.

The illustration represents a form of ear and bail for a tea kettle or other vessel, by means of which the bail may be retained in an upright position or folded down on the top of the vessel. This improvement has

HICKS' EAR AND BAIL.

been patented by Mr. Franklin Z. Hicks, of Rapid City, South Dakota. One of the ears, as shown, is of the ordinary form, to receive the eye on one end of the bail in the usual way, but the other ear is elongated, and the aperture therein for the other end of the bail is made in the form of a vertical slot, while extending in from the top of the ear is also a similar vertical slot, as shown more plainly in the small view. With this construction, the bail swings freely in either direction when it is lifted, but when the eye at one end of the bail is allowed to come to rest in the vertical slots of the ear, the bail is thus held in upright position.

Surgeon Parke.

Dr. Parke, whose brilliant services with the Emin Pasha relief expedition have excited the admiration of the civilized world, was on the 6th of June last presented by the editors of the *Lancet* with a massive silver salver, and on the evening of the same day, says the New York *Medical Journal*, was the guest of a brilliant representative gathering of the members of the medical profession, who had assembled to do him honor at a dinner at the Criterion restaurant. Sir Andrew Clark presided. Mr. Jonathan Hutchison, Sir James Paget, Sir Prescott Hewitt, Sir Joseph Fayrer, Sir Spencer Wells, and many other distinguished members of the profession were present.

After several speeches suitable to such an occasion had been made, Surgeon Parke, amid great applause, rose to respond and made a very modest speech, in the course of which he said that he would remind the company, if they were not already tired of hearing about Africa, that it was just three years and three months before that Mr. Stanley started from England to bring relief to Emin Pasha—not to bring him away from Africa, but to bring him relief. With a force of about eight hundred strong, they started from the mouth of the Congo on March 18, 1887. The shortest time any of them spent in the forest was one hundred and sixty-two days. The pygmies or dwarfs they met stood about three or four feet high, had tiny hands and feet, with fairly good features, and were bright and intelligent. They were covered all over with down, such as is seen on the cheeks of a boy of eighteen or nineteen in this country. The European provisions that the party took with them were finished within a month. The two bottles of brandy which each had were also soon exhausted. They had exactly the same food as the natives—bananas, with occasionally a goat a week divided among six or eight.

The Europeans survived much better than the natives did. Of the two Europeans who died, one died from climatic causes and the other was murdered. Emin Pasha was qualified in medicine by a German degree, of which he was very proud. He spoke twenty-two languages, of which he could write and read thirteen. When they started he (Surgeon Parke) took the precaution of vaccinating the majority of the men, and when the epidemic of small pox broke out, only four were attacked by the disease, and none of them died. On the other hand, the camp followers, who had not been vaccinated, took the disease in a bad form and died in great numbers. After a three years' march across Africa they reached Zanzibar with Emin Pasha. He wished to place on record the great admiration he and his brother officers felt for their illustrious leader, Mr. Stanley.

A SEPARABLE SPINDLE FOR SPINNING WOOL.

The spindle shown in the engraving is designed to obviate the necessity for using cop bobbins or quills in spinning wool, and secure better results in the quantity and quality of work performed. It has been patented by Mr. George Bailey, of Middleborough, Mass. The lower portion of this separable compound spindle has a cylindrical stub piece on which is a whirl to receive a driving band, and on the upper end of the stub piece is mounted a coupling head, secured in position by a cross key, or the stub piece may be screwed into the coupling head. The detachable part of the spindle, shown at the left in the illustration, is slightly tapering, and annularly grooved at intervals in its length, to prevent yarn from slipping off until its removal is desired. Near the top surface of the coupling head is a transverse rectangular slot, and in alignment with this slot is vertically formed another slot of less width and length. The latter slot extends an equal distance on each side of the center hole in the coupling head, and is adapted to permit diametrically opposite locking pins to enter into the wider slot below it, when, by a partial revolution, the detachable part of the spindle is locked fast to the coupling head. Just above the top end of the stub piece a transverse slot extends through the coupling head to permit the removal of dirt that might enter the socket hole in which the detachable part of the spindle is seated. Cops or quills may be used with this spindle if desired, in the same manner as with other forms of spindles. When a spindle is filled it can be removed bodily from the stub piece and coupling head by grasping the spun yarn and lifting the spindle, a slight revoluble movement releasing the interlocking connection of parts.

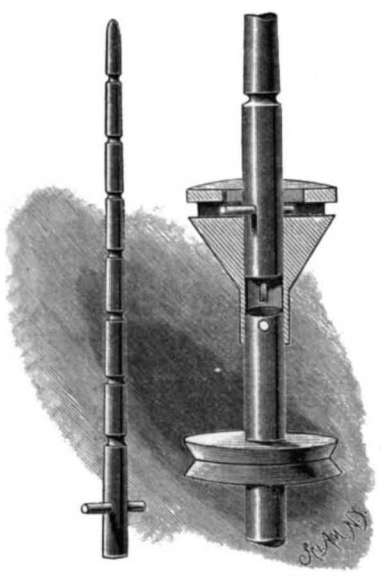

BAILEY'S SEPARABLE SPINDLE.

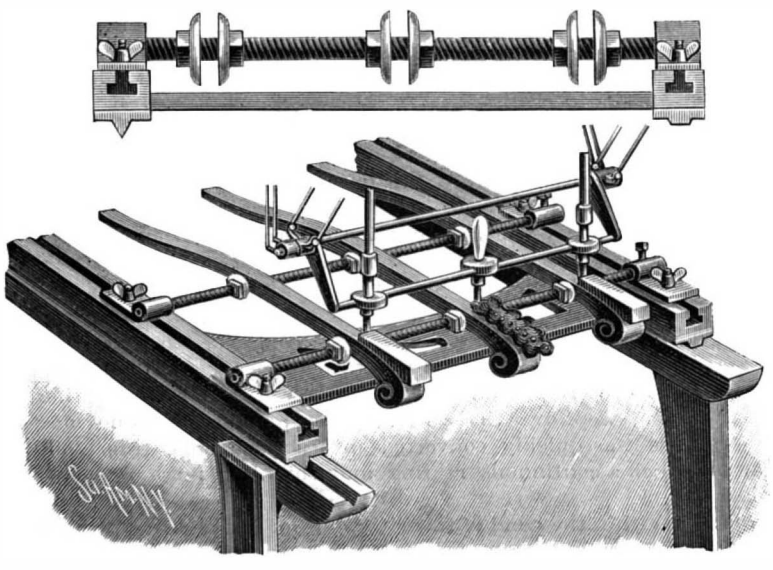

POTTER'S WORK-HOLDING TABLE FOR CARVING MACHINES.

A Broken Neck Mended.

Physicians connected with the Presbyterian Hospital are highly elated over the fact of their having successfully mended a broken neck. The patient, Harry Reigel, aged fourteen years, fell from an elevator, landing on his head and dislocating his neck, on May 8. When brought to the hospital the case was considered hopeless, but by experiments with extending weights attached to the patient's head and feet the neck was eventually set and kept in place by means of a plaster of Paris jacket The displaced bones are now properly set and the patient has full power of the neck.

AN alloy that expands in cooling and is suitable for repairing cracks in cast iron is made with nine parts of lead, two of antimony, and one of bismuth.

© 1890 SCIENTIFIC AMERICAN, INC.

A TUBE EXPANDER AND BENDER.

The implement shown in the accompanying illustration is designed to lock fast to one end of a tube or boiler flue, and retain the parts in position to expand the tube inside of the boiler against the flue sheet when the device is rotated, afterward flanging the end of the flue to return its projecting end against the outer surface of the flue sheet. This device has been patented by Mr. P. H. Benade, of Punxsutawney, Pa. Fig. 1 is a side view of the tool and Fig. 2 a longitudinal section of its front portion, Fig. 3 being a detached view of parts showing its operation in expanding a tube in contact with a flue sheet. The body or shell of the tool receives a conically tapered pin, and it has three spaced apertures for the reception of cylindrical rollers adapted to expand the flue when they are forced outward by the tapering pin and the shell is rotated. On the inner end of a sleeve sliding on the front end of the shell is a hub with three integral studs, for the reception and revoluble support of grooved flanging rollers, shown in Figs. 1 and 4, these rollers impinging on the front end of a flue to flange it when the device has been moved longitudinally to position in the flue. Through a threaded plug in the front end of the shell extends a bar with threaded outer end forming a detachable shank for the conical pin, there being a hand wheel on the outer end of the bar. Integral with the front end of the shell is a collar with radial perforations for rotating the shell with a lever, a loose collar with radial perforations serving as a nut to bear against the fixed collar, forcing the sleeve further on the shell, the other end of which has a cap nut to receive a connecting rod.

This rod is of such length, proportioned to that of the

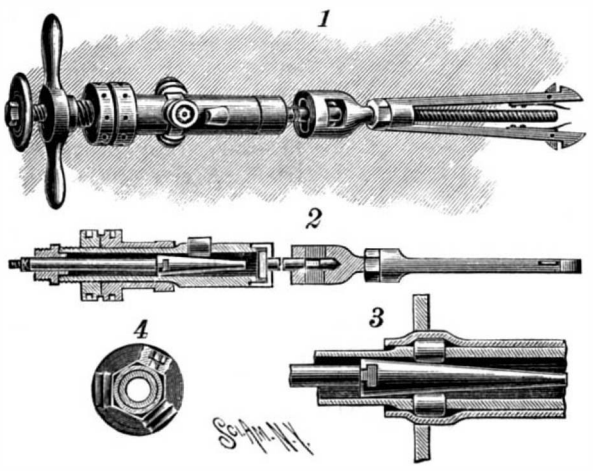

BENADE'S TUBE EXPANDER AND BENDER.

tubes or flues operated upon, that a spring dog is supported thereby to engage the end of the flue opposite to the end being set, the dog having diverging limbs terminating in wedge-shaped enlargements at their outer ends, and being connected with the rod by an interlocking coupling box, which is prolonged as a threaded bolt. In use the dog is passed into the flue from the end which is to be expanded and flanged, an accurate adjustment for length being effected by revolving the dog on the bolt end, the dog automatically maintaining the connecting rod, coupling box, and its bolt end extension axially coincident within the tube. The adjustment is such that the rollers in the three spaced apertures of the shell will lie opposite the portion of the flue engaged by the sheet, so that a rotation of the shell by the handle bar will expand the flue and force it against the edge of the sheet as the conical pin is forced against the rollers by the hand wheel at the end. After such expansion has been effected, the device is adjusted to bring the flanging rollers against the outer end of the flue, and the operation is completed by the joint action of these rollers and the feeding collar or nut. After the flanging or beading of the flue end, the rollers are withdrawn by reverse movement of the collar, allowing the sleeve to be slid forward, when the tool is pushed through the flue rearwardly.

A COPYHOLDER FOR TYPEWRITING MACHINES.

The illustration represents a device easily applied to typewriters to facilitate reading the lines of the copy, which can be readily inserted and moved as desired. It has been patented by Messrs. Martin L. Pipes and Emile F. Pernot, of Corvallis, Oregon. The casing, of which an end view is shown in Fig. 1, is adapted to be fastened to the front rail of the carriage, which is held in a suitable recess by a spring-pressed hook lever. Within the casing, as shown in the transverse section, Fig. 2, are two longitudinally extending rollers, the trunnions of the upper one of which extend through an inclined slot in the ends of the casing, and are spring-pressed, to hold this roller on the copy placed between the two rollers. The trunnions of the lower roller are in fixed bearings, and on the outer end of one of them is a ratchet wheel, adapted to be engaged by a double pawl on the end of the casing, the pawl being fulcrumed on an arm in which is a transversely extending slot, into which extends one arm of a bell crank lever, whose other arm extends downward on the front of the machine to within a short distance of the keys. A spring holds this lever in normal position,

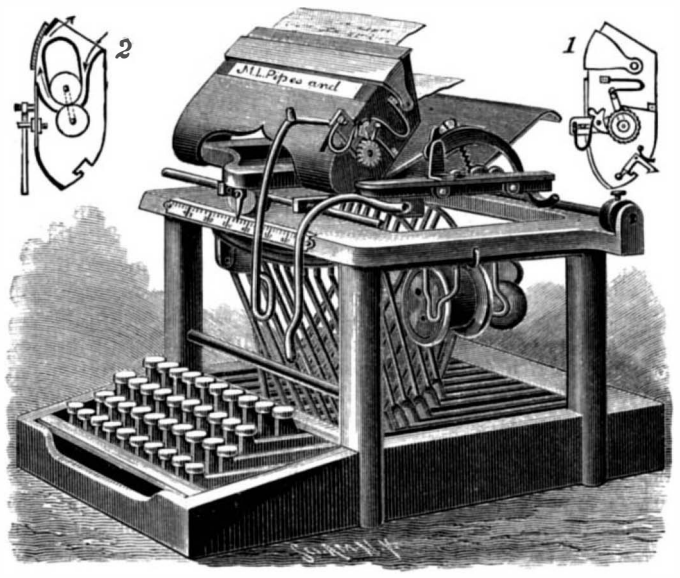

PIPES & PERNOT'S COPYHOLDER FOR TYPEWRITERS.

and in the front of the casing, at one end, is a slot, in which is an adjustable bolt, to limit the movement of the lever, so that the copy may be moved thereby just the desired distance. Higher up in the front of the casing is a longitudinal slot through which the lines of the copy appear, the width of this slot being increased or diminished, according to the height of the reading lines of the copy, by moving a plate with arms fulcrumed on the ends of the casing. A spring pawl holds the lower roller in place after it has been moved, and plates are arranged to guide the copy between the rollers, upward past the slot, and to the rearward, as shown by the arrows in Fig. 2. When the operator desires to turn the copy backward, it is only necessary to change the double pawl on the end of the casing, so that its other arm engages the ratchet wheel. The entire copyholder is held on the carriage, moving with and being swung upward with it when the operator desires to examine the typewritten copy.

AN IMPROVED METAL RAILROAD TIE.

A metal railroad tie designed to be light, strong, and durable, while having a degree of elasticity adapted to prevent injurious shocks to the rolling stock, is shown in the accompanying illustration, and has been patented by Mr. James P. Taylor, of Fort Worth, Texas. The tie is intended, when in position, to be

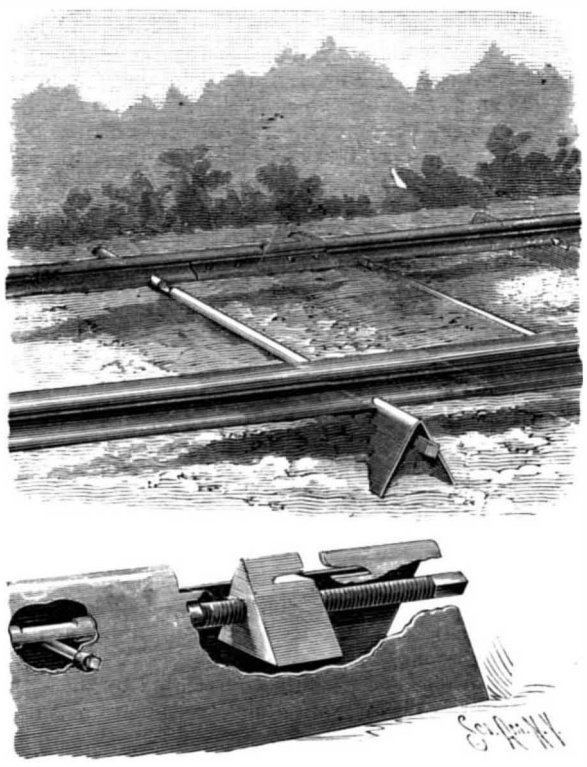

TAYLOR'S METAL RAILROAD TIE.

embedded in the ballast of the roadbed, and its shape is such as to facilitate the keeping of the roadbed dry and more stable than is the case with ties of the ordinary construction, as water will readily flow from its inclined sides. The body of the tie is preferably of wrought iron plate bent to nearly triangular shape in cross section, with longitudinal slots at the apex of the triangle for the rail seats, integral lips or flanges of the tie being adapted to hook over the outer edge of the base flange of the rail. To facilitate the ready and firm fastening of the rail in position, there is located in the body of the tie a rod, oppositely threaded at each end, where blocks or nuts are mounted, as shown in the small figure, each block having a lug adapted to fit upon the inner base flange of the rail. The blocks are brought into engagement with the rail flange by the application of a wrench to the outer squared end of the rod, a middle portion of the rod being also squared, and resting upon a transverse bolt, to retain the rod from rotation when in place, sufficiently to prevent it from relaxing the lugs, although the rod will yield when turned by a wrench to adjust the parts.

AN IMPROVED WRENCH.

A wrench which is more especially adapted for use as a pipe wrench, but which may also be employed as a monkey wrench, and has practically two handles, one of which may be used as a lever to disengage the jaws from the pipe, and adjust the outer jaw to and from the inner jaw, is shown in the accompanying illustration, and has been patented by Mr. Frederick W. Kasch, of No. 504 East Avenue, Austin, Texas. The main shank of the device is rectangular in cross section, and has integral with its outer end a jaw, immediately beneath the heel of which is hinged one end of a sleeve, in such manner that the sleeve will have more or less swinging movement on the main shank. To one side of the sleeve, and limiting its outward movement, is attached a yoke which encompasses the main shank, the sleeve being normally held quite a distance from the shank, and parallel therewith, by a spring. The sleeve is rectangular in cross section, and has a reduced opening at one end, and within the

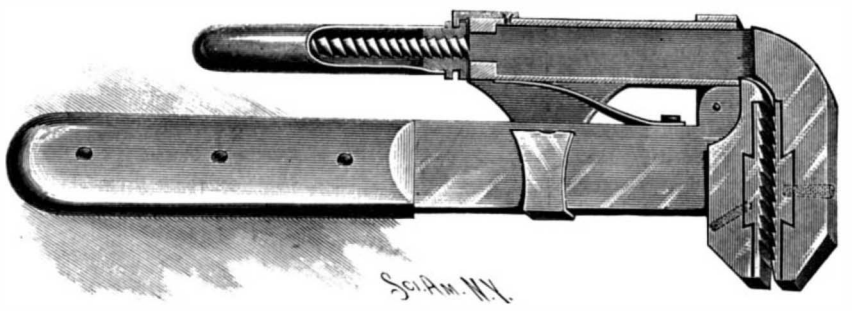

KASCH'S WRENCH.

sleeve slides an auxiliary shank having at its outer end an integral jaw extending over the jaw of the main shank. The auxiliary shank is reduced near its center to pass through the reduced opening of the sleeve, and the further portion of such shank is threaded and covered by a tubular handle. This handle has fitting in and projecting beyond its outer end a nut capable of receiving and turning upon the threaded section of the auxiliary shank, the nut having near its outer end a circumferential groove in which is inserted a tongue upon a clamping plate attached to the sleeve. By the manipulation of the tubular handle, through the medium of the nut acting upon the threaded portion of the auxiliary shank, the jaw of the latter is moved to increase or decrease the distance between the two jaws, the tubular handle forming a very convenient grasp for the hand in detaching the wrench from a pipe. This wrench is designed to be of a superior character in exactness of working, durability, and convenience.

Growth of Manufactures.

The trade statistics for 1889 of the eleven leading manufacturing industries—cottons, woolens, chemical, paper, agricultural implements, flour, lumber, glass, iron and steel, and ship building—are so complete and accurate that they anticipate the census reports, and furnish an instructive indication of the progress our entire industrial system has made in the last decade. These eleven industries in 1879 had $1,165,000,000 capital invested in them, and 844,776 hands employed, they paid out in wages $256,795,000, consumed $1,197,000,000 worth of raw materials, and showed a gross product of manufactures of the value of $1,774,000,000. In 1889 they had $1,784,840,000 capital invested, and 1,274,000 hands employed, they laid out in wages $320,689,000, consumed $1,586,000,000 worth of materials, and gave a product of manufactures of the value of $2,293,779,000. The increase has been in capital invested $619,740,000, in the number of hands employed 429,224, in the amount of wages paid out $93,894,000, in the materials consumed $397,000,000, and in the value of the product turned out of $519,779,000. There is over 50 per cent more capital invested in the specified manufactures than there was ten years ago, 50 per cent more hands employed, over 36 per cent more wages paid out, over 30 per cent more material consumed, and nearly 30 per cent greater product.—*Trade and Traffic.*

© 1890 SCIENTIFIC AMERICAN, INC.

DEPARTURE OF THE BALTIMORE FOR SWEDEN.

The imposing ceremonials which took place in this city August 23 last, in homage to the memory of the late Captain John Ericsson, were brought to a close by the final act of transferring the casket containing the precious remains to the decks of the war ship Baltimore. The scene is depicted in the illustration upon our first page. A procession of citizens, some six thousand in number, followed the hearse from the cemetery down Broadway to the Battery. It was a solemn and impressive spectacle. Among those in the line were the members of the American Society of Swedish Engineers, the American Society of Civil Engineers, the American Society of Mechanical Engineers, the Marine Society of New York, the workmen of the Delamater Iron Works, the Farragut Naval Veterans Association, lodges of Odd Fellows, marines, and officers, naval and military, of the United States.

The scene from the Battery, when the procession reached that point, was striking and animating. A fleet of national war vessels lay extended over the bay in a long line, the Baltimore at the head, while the adjacent waters were covered with steamers and vessels of every description, all crowded with spectators.

From the landing at the Battery the casket was conveyed on a small government steamer to the side of the Baltimore, and then reverently raised by tackle from the yard arm to the deck of the ship, the booming of minute guns on board the Ericsson monitor Nantucket being maintained throughout this solemn proceeding. The flag signals for sailing were soon after this displayed, the anchors were raised, and the stately Baltimore began her ocean voyage to Sweden. As she steamed slowly past the line of war vessels each one delivered its salute of twenty-one guns, and the same tokens of honor came from the embrasures of the various fortifications as the ship proceeded down the bay and went out to sea. John Ericsson was born in Sweden, July 31, 1803, and died in New York, March, 1889, at the age of nearly 86 years, of which about half a century was spent in this his adopted country. He was a man of wonderful intellect and remarkable achievements. His name is indissolubly connected with the early history of the locomotive and with the practical application of the propeller to ocean steamers. His great services to the people of this country in designing and realizing at a critical moment the turreted war vessel can never be forgotten.

THE NEW STATE HOUSE AT INDIANAPOLIS, IND.

INDIANAPOLIS MEETING OF THE AMERICAN ASSOCIATION FOR THE ADVANCEMENT OF SCIENCE.

BY H. C. HOVEY.

Nineteen years ago the A. A. A. S. met in the city of Indianapolis. Since then its meetings have been scattered annually from Montreal to Minneapolis, and as far south as Nashville. Meanwhile great changes have taken place in all parts of the country, and nowhere have these been more marked than in the Hoosier State. One of the most agreeable and noticeable improvements is the State House itself, where the daily meetings of the Association have been held, from Aug. 19 to Sept. 1. Any one who ever saw the dingy old capitol, in whose halls we convened two decades ago, would appreciate the transformation that has been effected by a happy combination of money, brains, and integrity in using the finest building materials obtainable in constructing the capitol, magnificent in its dimensions and unsurpassed in the thoroughness and perfection of its construction. As this edifice is a model in its way, it may be well here to give some of the principal facts as they were stated to me by Prof. John Collett, to whom, together with Gen. T. A. Morris, Gen. John Love, Messrs. Nelson, Seward, and others associated with them as State House commissioners, are chiefly due the admirable results embodied in this form.

In the center of a park of nine acres, bounded by four broad avenues and located in the heart of a city of 125,000 inhabitants, rises a lofty and stately structure whose crowning glory it is that from its massive foundation to its gilded dome every foot of it is honest work, all paid for within the original appropriation made by a vote of the legislature. The length of the building is 500 ft., its width 283 ft., its height 235 ft., and the portico 100 ft. high. The style is Neo-Grac, with interludes of Victorian plainness. The foundation and solid walls laid in hydraulic cement are claimed to have strength enough to resist cyclonic or seismic action, and the building in every part is so absolutely fire proof as to dispense with the need of insurance.

The main material used is Indiana oolitic limestone, which contains 98 per cent carbonate of lime, and resists heat or cold from plus 100° to minus 30° F. Glacial tracks down to the finest hair lines remain upon its exposed surfaces unchanged during the centuries untold that have passed since they were made. It was all selected from the quarries of Monroe and Lawrence counties, Ind. The workable beds are from 10 to 100 feet thick and are easily cut by steam channeling machines. The stone is homogeneous, grayish white, with a density of 150 pounds per cu. ft. and a crushing weight from 10,000 to 26,000 pounds to the inch. Since its introduction into the State House the demand for it has increased a thousand fold, and the railroad facilities are insufficient to carry the burden. Specimens of this stone may be seen in some of the finest buildings on Wall Street, New York, in the Vanderbilt palace on Fifth Avenue, in some of the best buildings on Chestnut Street, Philadelphia, in the new State House at Atlanta, Ga., and the Cotton Exchange at New Orleans, whose outside statuary groups remain perfect where neither marble nor granite would endure. It is estimated that during the four years since the State House was completed it has paid for itself ten times over as an advertisement of the resources of the State, especially in the items of stone, lime, cement, and hard woods. The rooms are finished with white oak, quartered, no other kind being used in the building. The stone work throughout is dressed to faced edges, from ¼ to ½ inch joints, so there is no possibility of cracking, as occurred in the dome of the Connecticut capitol, which had to be filled with type metal to keep it from falling. Here the dome is as solid as the natural rock, and the commissioners defy any visitor to find the slightest crack or sign of settling in any portion of the immense structure. The granite foundation stones and numerous polished granite shafts were brought from Maine, the white marble for tablets and statuary from Vermont; the clouded and variegated marble for the columns for the magnificent colonnade, visible at one glance through three stories, are from Tennessee. Every block of stone in the building passed under the inspection of Prof. John Collett, who inexorably rejected whatever was suspicious or in any way objectionable. There is not a block of stone in the whole building taken from a quarry where either powder or dynamite had been used.

Begun in October, 1878, it was finished October, 1888, and has now been in constant use for four years, during which time not one dollar has been spent for alteration or repairs. The original appropriation was two million dollars. Costly substitutions were made as the work progressed, granite for brick, marble for limestone, solid oak for cheaper woods, and yet the total cost was but $1,980,969, thus coming considerably within the limit set. This unusual and honorable result is due to the integrity, skill, and fidelity of the commissioners.

Among the merits especially appreciated by the scientific visitors to the capitol may be mentioned its perfect water supply, perfect ventilation—enabling members to keep awake during the dullest discussions. The royal commissioner of Austria, in visiting this State House, remarked that in all his travels he had never seen a large public building, temple, or cathedral, that did not have many dark, dirty recesses; but he found here that the corridors were so lighted from immense skylights that every nook and corner was flooded with light: while every business room was, at some hour of the day, visited by sunshine. If undue space seems to have been given to the description of this spacious and commodious building, my excuse is that the Association was so delighted with it as to spend all their spare time either in admiration or praise; and much of the success of this meeting has been due to the fact that it was held in an edifice where there was room for all the sections within easy reach of each other and with every facility for carrying on their special sessions to advantage. The citizens of Indianapolis, moreover, were justly proud of their guests, and did everything in their power to make the meeting the most brilliant and enjoyable the body has ever held. When Lieut.-Governor Chase, in his hearty address of welcome, declared that for the occasion he put the 36,000 square miles of the commonwealth of Indiana at the disposal of the A. A. A. S., every citizen who heard him said amen. The meeting for organization and welcome was held in the Hall of Representatives, with several hundred members of the A. A. A. S. present, besides a sufficient number of citizens to occupy every seat and overflow into the lobby. The opening prayer was offered by Dr. Van Anda, after which the retiring president, Prof. T. C. Mendenhall, resigned the chair to Prof. G. L. Goodale of Harvard. Dr. G. W. Sloan, in behalf of the local reception committee, made brief remarks, and introduced Lieut.-Gov. Chase and Mayor Sullivan, who welcomed the Association in behalf of the State and city.

After the general session, addresses were made by the vice-presidents before their several sections. In section "A" Prof. S. S. Chandler made an address in regard to the community of nature between the variable stars and the other stars of our sidereal system; their number, size, color, and fluctuations of brightness. In section "B" Prof. Abbe urged a broader study of terrestrial physics, as distinguished from the line of molecular physics, to develop which many laboratories and professorships have been established. Under the general head of geo-physics he would include vulcanology (the study of interior depths), geogomy (the study of the earth's crust), magnetism, the aurora borealis, gravitation, attraction, oceanic waves, currents and tides, seismology, and meteorology. In section "C" Prof. R. B. Warder spoke on recent theories of "Geometrical Isomerism," illustrating his paper by models and diagrams to explain the campaign that is being carried on against the stronghold of atomic mysteries. In section "D" Prof. J. C. Denton, of Hoboken, N. J., gave a very interesting history of "Attempts to Determine the Relative Value of Lubricants by Mechanical Tests." He illustrated, in a unique manner, by means of the stereopticon, experiments with crude and refined oils in their effect upon the rubbing of wearing surfaces; and in explanation of the paradox that overheated journals may be relieved by applying sand or emery to the bearings. In section "E" Prof. J. C. Branner spoke at great length on the "Relations of State and National Geological Surveys;" which as he claimed should stimulate each other and encourage private enterprise and investigation. With a splendid equipment of men and means, the respective work of the various surveys ought to be more sharply defined to prevent a waste of effort. As it now is, much geological literature is practically worthless, being an incumbrance rather than a help. Many errors and annoyances might be prevented by skillful and cordial co-operation. He made a special plea for utilizing local talent, even of a non-professional sort, under the direction of competent conductors. In section "F" Prof. Minot treated a subject of special interest to biologists, "The Phenomena of Old Age." He entered on a large field of statistical inquiry, with hints as to how it might be worked, and its materials made to yield valuable results. He made the singular statement that there is, scientifically speaking, no period of vital development, but only a steady decline from birth onward. There is much to be done in the domain of biology to solve the problems of reproduction, heredity, sex, growth, variation, death, and the general economy of nature, in order to explain the phenomena under consideration.

In the section of economic science and statistics, Hon. J. R. Dodge delivered a very careful and original address on the American standard of living and the advantages enjoyed by the producing classes of the

© 1890 SCIENTIFIC AMERICAN, INC.

United States. He spoke of the wasteful use of food in this country as compared to other countries of the world, the profuse supply of clothing, the constantly increasing demand for the adornment of the home, the alleged depression of the agricultural class, which he considered to be greatly exaggerated, as he did also the unfortunate statements made in regard to farm mortgages and their relation to independence and prosperity. He treated also on the growing demand for a higher education, which, he said, was too often linked with a distaste for useful industry. In view of all these things comes the question, "Shall the present manner of living be maintained, and with it the constant increase in wages demanded by the American people?'

In the anthropological section Dr. Frank Baker, of Washington, D. C., gave his views "In Regard to the Ascent of Man." By this he meant the effort of the human being to assume an erect position from one that had previously been semi-erect. He regarded the struggle as still going on, and as serving to explain the liability of man to certain deformities and diseases from which quadrupeds are exempt.

The races of men and the anthropoids sprang from a common stock, as he thinks, far back in prehistoric night; though each being, in its own way, has fought the struggle for existence. The results of the erect position are so great as to affect the whole life of man, controlling his habits, directing his actions in war, the chase, and society, and, finally, moulding peoples, nations and races.

Correspondence.

Cutting Glass Bottles.

To the Editor of the Scientific American:

I have seen three different modes of cutting glass bottles described in your valuable paper, and do not doubt they are practicable. Yet I should like to mention a very simple and easy way, which I have tried several times without failing. Saturate a piece of cotton string in kerosene (alcohol, benzine, etc., will, I suppose, answer just the same), tie it around the bottle as close as possible and apply a match. By holding the bottle in a horizontal position with both hands, it can be turned slowly, allowing the fire to burn round. If the glass does not crack immediately after the flame is extinguished, let the water from the hydrant drip on it, and the cut is clear and even. Smooth the sharp edges with a file.

Chicago, Ill. CHRISTIAN KOCH.

Work of Amateur Electricians.

To the Editor of the Scientific American:

I have made simple electric motor described in SCIENTIFIC AMERICAN SUPPLEMENT, No. 641, with a few changes. Made the commutator and brush holders same as they are made by electric companies. The bearings of brass, and bolted them to the sides of field magnet, which is of solid iron. Use the Thomson-Houston incandescent current. Use the motor to run novel window displays during the holidays. Have made a working telephone, also described in one of your SUPPLEMENTS, and am now making a phonograph. H. C. ALBRECHT.

Terre Haute, August 19, 1890.

To the Editor of the Scientific American:

Seeing in your issue of SCIENTIFIC AMERICAN, July 19, a request that the amateur electrical workers report, I will state that I have read SUPPLEMENT Nos. 161, 599, and 600, and have made a dynamo of the same size as the one described in SUPPLEMENT, No. 161, but I improved it according to the two other articles. I had the field magnets cast in the same shape as those of the eight-light dynamo. It has a Siemens armature, made with washers of wrought iron as a core, and having twelve coils of No. 20 wire, each coil having about 20½ feet of wire in it. The commutator is made of large copper wire, flattened into bars, mounted on a hardwood cylinder, and held in place by two brass bands, one at each end. The bands are separated from the bars by pieces of tape, and each bar is separated from the others by pieces of shellacked walnut wood. The fields are wound with four parallel No. 18 wires, which can also be connected in series similar to the eight-light dynamo. It works better as a shunt machine running the field coils in series.

With the dynamo I can run two six-candle Edison lamps, in parallel or series; but it takes a very high speed to run them in series, from which I conclude that the voltage must be from 16 to 22, according to the speed. The lamps require 10½ volts. I can produce strong shocks, run small motors, charge accumulators, produce a small arc light, and heat an inch or more of No. 30 iron wire white hot. I have added to the field coils four layers of No. 20 wire, which I run in parallel with the No. 18, and find that I can produce the same results with a much lower speed. I have learned a great deal about electricity since I subscribed for the SCIENTIFIC AMERICAN, about eight months ago. I shall probably make a larger dynamo next winter. C. F. KELLOGG.

Prairie Center, Ill., August 21, 1890.

To the Editor of the Scientific American:

I noticed your request to electrical workers in the July 19 issue, and will tell of my experience in making an induction coil according to the instructions in SUPPLEMENT, No. 160.

My first attempt was with bare wire in the secondary coil, and as I had no engine lathe to secure uniform spacing of the wire, I tried to space by the aid of a comb with the teeth cut very short. The result was anything but satisfactory, and led to the construction of a new secondary coil, using silk-covered wire. Winding each layer the full length of the coil, and then giving it two coats of shellac varnish, then over each layer of wire was wrapped two layers of common manila wrapping paper and another coat of shellac applied.

The coil was finally completed and mounted on its base with commutator and everything complete, a battery was attached and the current breaker buzzed like a bumble bee, but no spark could be obtained, though an accidental contact with the poles with bare hands showed that the induced current was there, and much too strong to pass through any one's system with safety.

Here was a dilemma, something was wrong, and letters to various authors of text books on electricity gave no way out of the difficulty.

In the course of a week or more a spark, perhaps the thirty-second of an inch in length, could be obtained between the poles, and in the course of a week more increased in length to perhaps one-eighth inch.

This was encouraging, but not satisfactory, and a new coil was determined on. This time I used silk-covered wire, but wound the coil in two sections, as described in the SUPPLEMENT, using no shellac. The space between the sections was filled with a piece of walnut made into a ring. This was split and boiled in paraffine wax to insure its insulating qualities. The two halves were then fastened together by means of screws. I used only one pound of wire in the secondary coil.

This coil when completed was a success, giving with a battery of four cells a spark from three-quarters to an inch in length.

This coil was constructed some eight years ago, and afterward sold to the high school at Tecumseh in this State, where it is still in use.

The failure of the shellacked coil was a source of much perplexity to me then, and I am not positive that I can explain it yet, but I have been informed that shellac varnish, while apparently dry in a few hours, is not sufficiently dry to serve as a complete insulator, and requires weeks to become so, and had I placed the coil in a dry room for three months, it would then have acted satisfactorily. I believe there is some truth in this, and it may aid some other amateur perplexed as I was. E. A. CONDIT.

Morenci, Mich., August 23, 1890.

The English Hop Industry.

A report has been issued by the Select Committee of Parliament appointed to "inquire into the causes which have produced the steady decrease in the acreage of land under hop cultivation, and the serious displacement of labor occasioned thereby, and to report as to the best means, if any, of providing a remedy." We abstract the following:

In the wealds of Kent and Sussex and in Mid-Kent the decrease of hop cultivation has been very serious, namely, from 43,400 acres to 31,900 acres, or 26 per cent, and there can be no doubt that, having regard to the great amount of capital outlay necessary for bringing hop land into cultivation, and for providing the necessary buildings, and to the yearly expenditure on labor for cultivating and picking the hops, this great reduction in the area under cultivation has told with exceptional severity on all classes in these districts.

From the evidence received it appears that the best qualities of hops are grown in East Kent and in parts of Mid-Kent, then come the Farnham, the Herefordshire, and Worcestershire hops, the last two of which have grown greatly in favor the last few years, and lastly come those of the wealds of Sussex and Kent, where hops abundant in quantity but of less value in quality are grown. The decrease of cultivation, therefore, has occurred mainly in those districts where hops of inferior quality are produced, and it is from these districts mainly that complaints have been made to the committee.

The immediate cause of the decrease is owing to the very low prices which have ruled for hops during the last few years.

The great majority of witnesses engaged in the cultivation of hops attribute this fall of price mainly, if not wholly, to foreign imports. They allege that the price of foreign hops rules the market for English hops, and that foreign hops have largely supplanted English hops in the home consumption. The greater number of these witnesses favor the imposition of a duty on foreign hops to the amount of 30s. or more per cwt. By some it is suggested that this duty should be accompanied by a tax of £1 per acre under cultivation of hops in England. This, however, was objected to by the great majority of witnesses. The proposal, therefore, is practically one for a protective duty on hops. But the committee cannot recommend the imposition of a duty upon foreign hops.

All the evidence shows that cultivation of hops was carried on with profit previous to 1879, the import of foreign hops during this period was large, but in spite of this the area of cultivation rose from 56,000 acres in 1866 to 71,700 acres in 1878. It is evident, therefore, that the recent depression is due to other causes besides foreign competition.

From the evidence and statistics laid before your committee, there is reason to conclude that those causes have been—(1) the reduced consumption of malt and sugar for brewing purposes, and consequently of hops since 1879, owing to the depression of trade and other causes; (2) the economy effected in the use of hops in proportion to malt since the year 1882, owing to the more scientific manufacture of beer and to the altered taste of the public, which has required a beer of lighter and brighter character; (3) the use to a certain degree of hop substitutes.

The evidence further shows that there has been a considerable economy in the use of hops since the year 1882. The very high price of hops in that year induced brewers to turn their attention more closely to the subject, and science was brought in aid of the manufacture of beer. It was found possible by the use of ice to brew continuously throughout the year, the consumption of beer became more rapid, it was no longer necessary to keep large stocks of beer for many months, the taste of the public altered, a brighter quality of beer, less heavily hopped, is now preferred. As a result of these changes, the proportion of hops used to a quarter of malt has been reduced to an amount estimated generally at 1½ pound per quarter of malt, or 15 per cent. When there is added to this the reduction due to a reduced consumption of malt, estimated at 12 per cent, the two together account for a largely reduced demand, and consequently for a fall of prices. It was to be expected, therefore, that there would be a reduced cultivation of hops corresponding to the increased cultivation in the decade prior to 1878.

The change which has taken place in the quality of beer, and the increased demand for a lighter and brighter beer, has also told mainly on the inferior qualities of hops, for the better qualities alone can be used for beer of this kind, and it has consequently followed that the reduced demand has mainly affected those districts where the inferior qualities of hops have been grown. The evidence shows that the same causes have led, in many parts of the Continent, to a reduced cultivation during the last few years of much land where inferior hops were grown.

It is confidently stated that none of the so-called substitutes can be relied upon to perform the work of hops in the manufacture, flavor, and keeping of beer. The use of hops is represented to be fourfold—first, to precipitate or render insoluble certain nitrogeneous ingredients of the wort; secondly, to preserve the beer by preventing a renewal of fermentation during the time before it is fit for consumption; thirdly, to give it the bitter taste to which the public have become accustomed; fourthly, to give it a delicate aroma.

None of the various drugs which are advertised as substitutes for hops performs any of these functions except the third, that of giving a bitter taste to the beer. It is admitted generally that it is impossible to make beer such as the public requires without hops, and that at most the drugs referred to can only be used as substitutes for a small proportion of the hops which would otherwise be used. It is alleged that none of the larger and better class of brewers makes use of any of these substitutes.

Electric Light in the Suez Canal.

The number of vessels passing through the Suez Canal at night by means of electric light is increasing with extraordinary rapidity. The regulations for the use of the electric light came into operation in March, 1887, and during the remainder of that year (according to statistics given in the recent British consular report from Port Said) the number using it was 394. In 1888 the number rose to 1,611, and last year reached 2,445. Prior to March, 1887, the privilege of traveling by night with electric light had been restricted to vessels carrying the mails. Since then all ships which conform to the regulations are allowed to proceed by night. The average time of transit has also been considerably shortened. In 1886 it was 36 hours; in 1887, 33 hours and 58 minutes; in 1888, 31 hours and 15 minutes; and in 1889 it had been reduced to 25 hours 50 minutes. The average time for vessels using the electric light in 1889 was 22½ hours. The shortest time taken by a steamer in the transit of the canal in 1889 was 14¾ hours, which is ten minutes less than the fastest passage on record previously.

© 1890 SCIENTIFIC AMERICAN, INC.

CHRISTIAN HENRY FREDERICK PETERS.

Professor Peters was born in Coldenbuttel, in the Duchy of Schleswig (then a dependency of Denmark), on September 19, 1813. He was educated at the University of Berlin, where, in 1836, he received the degree of doctor of philosophy, and then spent some time in study at Copenhagen. In 1838 he accompanied Baron Sartorius von Walthershausen to Sicily, where, until 1843, he was engaged in making a survey of Mount Etna. Owing to the death of Walthershausen, the survey was never finished, but the published results of the work are said to afford the most exhaustive description that has ever been given of any mountain. At the close of this work he was engaged at Naples on the topographical survey of the Sicilies, but soon retired to join the revolutionary forces. He served under Garibaldi, and was made major in the artillery for bravery on the field of battle. Twice he was severely wounded, and when the movement collapsed, a price was set upon his head by the government. He was obliged to live in the woods for weeks, with hardly any food and no shelter, to escape capture and execution. Eventually he escaped on a small brig to Turkey, and there devoted himself to the pursuit of his chosen science. A few years later he made the acquaintance of George P. Marsh, the United States minister in Constantinople, by whom he was persuaded to come to this country. His letters of indorsement from scientists abroad, including one from Von Humboldt, secured for him an appointment in 1853 in the United States Coast Survey, and at first he was stationed at the observatory in Cambridge, Mass., but later was assigned to work at the Dudley Observatory, in Albany, N. Y.

In 1858 he was called to Hamilton College as the first director of the Litchfield Observatory in Clinton, N. Y., and thereafter remained connected with that institution until his death. In 1867 Edwin C. Litchfield, of Brooklyn, N. Y., presented the college with the sum of $30,000 to endow a chair of astronomy, and Dr. Peters was at once chosen to that place.

Soon after his settling in Clinton he began that work with which his fame is so justly connected—the observation of the zone stars and placing them on charts. In this direction it is said that he accomplished more than any other astronomer. At the time of Herschel not over 20,000 stars were registered, and this number was increased to 50,000 by Lalande, while Dr. Peters proved and registered more than 112,000, including stars as minute as the thirteenth magnitude in his scheme. It was in prosecuting this work, which is his distinguishing contribution to astronomical science, that he also became famous as a discoverer of planetoids. While examining stars to determine their place, a strange star would be observed in the field, and which, if after-calculation confirmed the record that no star existed in that particular spot, would be reported as a newly discovered asteroid. Forty-eight of these discoveries are credited to Dr. Peters, which is a larger number than any other astronomer can claim. On the night of July 31, 1872, and again on the night of June 3, 1872, he discovered two of these planetoids. His last discovery was on the night of August 25, 1889, when he found asteroid No. 287. From his first computation it appeared that a portion of the new asteroid's orbit was within a portion of the orbit of Mars, and while subsequent calculations made this theory doubtful, still it is probably the nearest asteroid to the sun yet discovered. The largest number of these found by him in a single year (1879) was eight, and a computation of the aggregate surface of forty of them indicates an area of 266,978 square miles, or about that of the State of Texas. Dr. Peters fixed the locality of the zodiacal stars upon charts which give an accurate picture of the parts of the sky that they depict, and which will serve hereafter as a sure oasis for studying changes in the heavens. Twenty of these, under the title of "Celestial Charts," were published by him, at his own expense, in 1884, and a second series was completed and ready for the press in 1888, but have not been published.

For ten years Dr. Peters made a daily observation of solar spots, making a record of nearly 14,000 spots, but he never published his results, which still remain in the safe of the Litchfield Observatory. Every observation has a drawing showing the position of the spot as proved by calculations at the time when seen. This work is believed by astronomers to have been the most valuable of his researches, especially since stellar photography makes easily possible the star charts upon which he spent so many years.

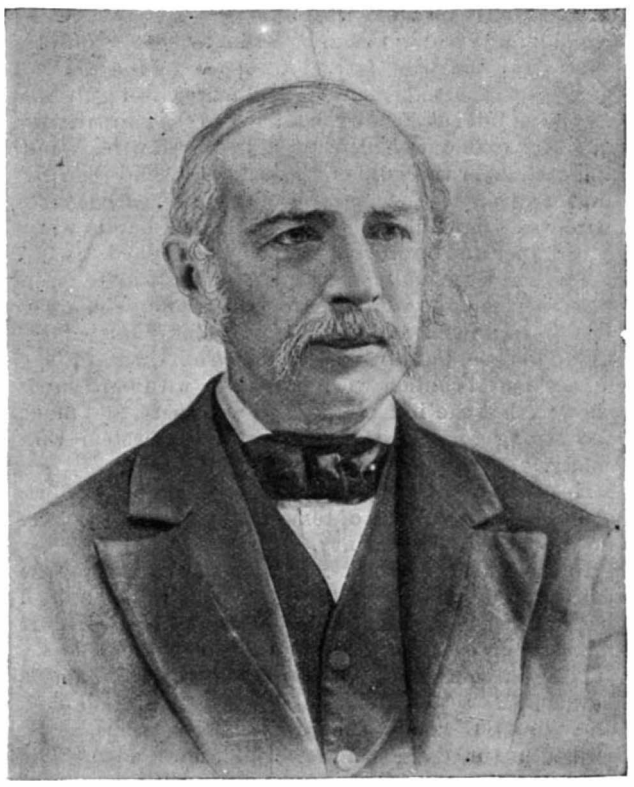

CHRISTIAN HENRY FREDERICK PETERS.

Under the auspices of the regents of the University of the State of New York he determined the longitude of several places in this State, including the western boundary. Dr. Peters had charge of a party that observed the solar eclipse of August 7, 1869, at Des Moines, Iowa, and in 1874 was chief of the expedition sent to New Zealand by the United States government to observe the transit of Venus on December 9 of that year. By means of double image micrometers he measured the apparent diameter of Venus, thus determining the real size of the planet with an error of probably not more than 1-300th part of its value, and also secured 237 photographs of that shy planet. Of his work at that time it was said: "There is no need of other observations. Dr. Peters has accomplished all that was to be done." He was less fortunate in the second transit of Venus, on December 5, 1882, for clouds hid the planet during the time when the observation had to be made; and likewise in 1883, during the occultation of Jupiter, a phenomenon of centuries, a similar fate befell him. But he accomplished much, and of him it has recently been said: "The reputation of this learned man fills the world, and not only that, but it is written upon the stars themselves."

An unfortunate controversy marred the last two years of his career. He sought the aid of Chas. A. Borst, in the preparation of a "Star Catalogue," and the latter, with his sisters, spent several years in computing the results, also aiding in the researches necessary to its completion. Ultimately Mr. Borst claimed that the work was his own, and in that opinion he was sustained by several distinguished authorities, including Simon Newcomb and Asaph Hall, of the U S. Naval Observatory in Washington, D. C. The case went before the courts, and a decision was rendered awarding the "Star Catalogue" to Dr. Peters as being his property, with interest on its value, and six cents damages to carry costs. It is understood that an appeal will be taken against this decision by Mr. Borst.

Dr. Peters was a member of both foreign and American scientific societies, and in 1876 was elected to the National Academy of Sciences. He attended the International Congress of Astronomers, held in Paris during April, 1887, under the auspices of the French Academy of Sciences, and at that time was made a chevalier of the Legion of Honor by the French government. The results of his researches were published in various scientific journals, but chiefly in the *Astronomische Nachrichten.*

Although a specialist, Dr. Peters was learned in many branches of science, and was a linguist of rare ability. This knowledge made him a favorite at social gatherings. He never married, and his habits were simple to the extreme. Among the students he was known as "Twinkle," but he was a strict disciplinarian, and always demanded that the dignity of his office be respected.

On Friday, July 18, he asked the college janitor to arrange the college astronomical apparatus so that he might make some observations during the evening. The next morning they found him seated on the stone steps leading to Hungerford Hall, where his apartments were. In the night death had come to him, and when daylight broke his soul was far away in the heavens among those starry bodies whose study had ever been his constant delight while he was on earth.

A JET-PROPELLED STEAM LIFEBOAT.

The Royal National Lifeboat Institution, after many years of effort, has at length succeeded in obtaining a lifeboat which may be mechanically propelled. At the beginning of 1888 a proposal for a steam lifeboat was submitted to the Institution by Messrs. R. & H. Green, well known shipbuilders at Blackwall, which, having passed through various modifications as the result of consultation with the committee and their professional officers, was accepted by the Institution, and a steam lifeboat, constructed of steel and propelled by a turbine wheel, has now been completed. Such a boat, if successful, will necessarily only be able to be used at a limited number of stations. Our engraving is from the *Illustrated London News*, and the accompanying particulars from the London *Graphic*. The details of this novel lifeboat, which has been named the Duke of Northumberland, and is to be stationed for the present at Harwich, are as follows:

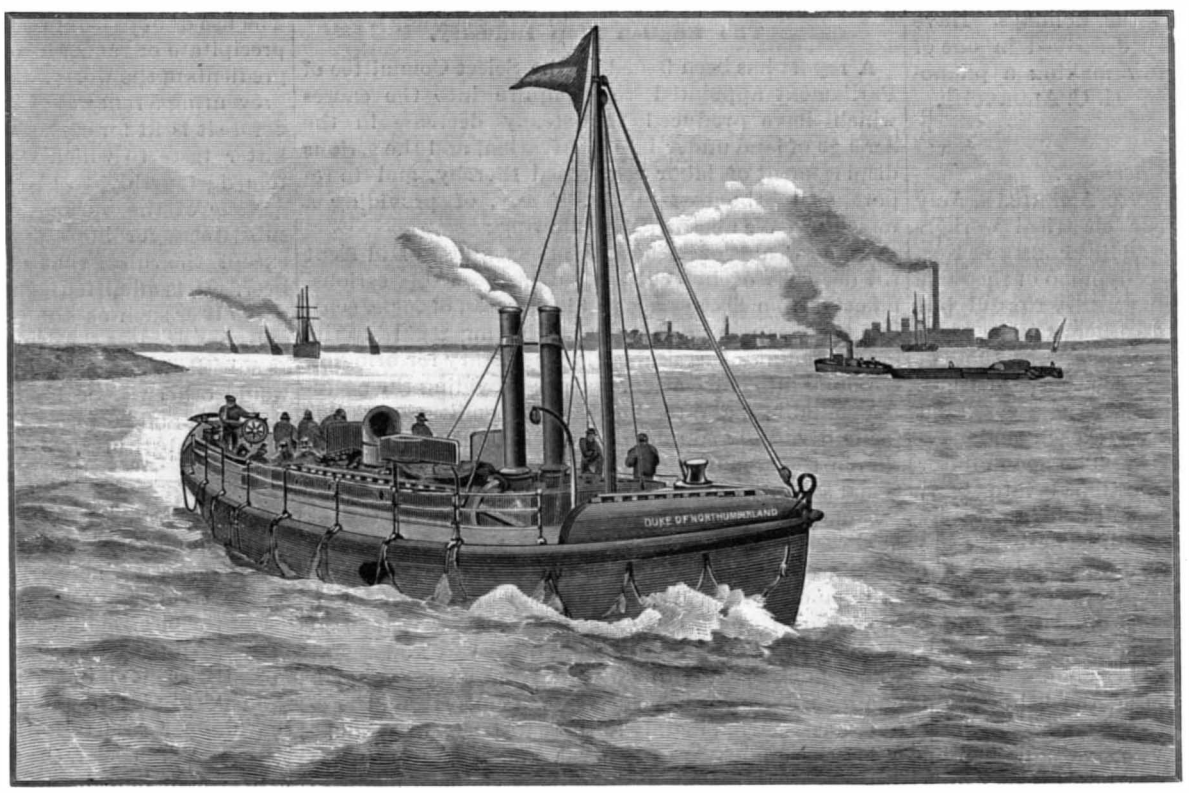

A JET-PROPELLED STEAM LIFEBOAT.

Length, 50 feet; beam, moulded, 12 feet; breadth, extreme, 14 feet 3¾ inches; draught, loaded (extreme) with 3 tons of coal, 30 passengers, 9 crew, and full outfit, 3 feet 3 inches; displacement at this draught 21 tons; indicated horse power, 170. The propulsion is effected by a jet of water which issues from the stern, and which is impelled by a turbine wheel or pump.

It may be interesting to state the reasons for the decision given in favor of a hydraulic boat, as on the mere face of it the waste of power would appear to be a serious objection. This, however, is not really the case if the principle is compared with other methods of propulsion, and, as a matter of fact, there is no other possible way of accomplishing the task.

A paddle vessel in such a service is, of course, out of the question, as she is so easily disabled by the slightest obstacle, and under no circumstances could she be used as a sailing vessel.

A screw propeller in smooth water is the most efficient way of absorbing the power developed, but in heavy seas it would be continually out of the water, and half the time practically useless, to say nothing of

© 1890 SCIENTIFIC AMERICAN, INC.

the danger involved, for it must be remembered that the racing of the propeller is a most frequent source of danger in a screw engine, besides the risk of breaking the main shaft and consequent total disablement of the boat. Further, there is continual risk of fouling the screw with wreckage, or breaking it when taking the ground, and, lastly, the auxiliary power derived from the sails would be greatly reduced by the dragging of the screw propeller through the water.

Therefore both these types of steam vessels, admirable as they are in their own particular spheres, must be always impracticable for lifeboat service, and having this in view, it was considered that the hydraulic principle alone remained. This type, therefore, having been finally adopted, it only remained to fit the machinery into a vessel sufficiently strong, light, seaworthy, handy, and fast. Neither time, pains, nor expense was spared in order to obtain a boat with the greatest possible strength compatible with lightness. The very best steel procurable was employed in her construction, having been first submitted to the severest cold tests. The riveting is a special feature, being far in excess of that usually employed in torpedo boats and similar vessels. This is attested by the fact that in this little vessel, only 50 feet in length, there are no less than 72,000 rivets, exclusive of screw bolts and fastenings in connection with the machinery. The strength and seaworthiness is further amplified by a complete system of subdivision of longitudinal and transverse watertight bulkheads, giving in all fifteen watertight compartments, each of which can be rapidly drained by bilge pumps and steam ejectors.

Great attention was paid to insure stability, and several tests were made, one being of a very practical nature. All the weights were placed on board, and a heavy parbuckle was passed completely round the vessel. The end of this was fastened to a powerful steam crane furnished with a dynamometer, and the boat was then inclined until she lay entirely on her beam ends. In this position lack of stability would have been apparent by her turning completely over, which she was quite free to do, but so confident were the designers of the accuracy of their calculations (which showed that the boat possessed righting powers to 110°), that two members of the firm of contractors remained on board during the whole experiment.

The well, perhaps the most important feature to a shipwrecked crew, is capable of comfortably accommodating thirty passengers, and is situated abaft the machinery space. The bottom and sides of this well are furnished with ten large freeing valves, which will promptly clear it of water in the event of its being flooded. It is surrounded by substantial teak lockers, forming seats, and its deck is covered with teak gratings. Under this deck are two water tanks, holding one ton each, and which represent the weight of a shipwrecked crew. When leaving for a wreck they will be full, but on returning the water can be pumped out if necessary by the donkey engine.

A number of visitors, among whom were Mr. Charles Dibdin, the secretary of the Lifeboat Institution, and Capt. the Hon. H. W. Chetwynd, R. N., Chief Inspector of Lifeboats, recently made a trip from Blackwall in the new boat, with a view to inspecting her capabilities. The measured mile sea trials gave a mean speed of 8·424 knots. Tests were also made with her maneuvering power, which proved to be remarkably good, both by rudder and turbine. Going at full speed, she made with rudder a half circle in thirty-five seconds, and the full circle in fifty seconds. Going slowly, with rudder and turbine, she made the full circle in forty seconds, and with turbine alone in fifty-two seconds. By working the levers on deck the boat was brought from full speed to a dead stop in thirty-two seconds, and from a dead stop to full speed in four seconds.

These tests, which were conducted with the greatest accuracy, proved conclusively how entirely the vessel is under the control of the officer on deck, without necessitating any communication with the engine room.

THE ELECTRIC RACE COURSE.

Whatever may be the opinion that is held as to horse races and their moral influence, it is none the less certain that they offer an irresistible attraction to a large number of persons, and that this growing passion prevails equally in all the degrees of the social scale. Bold innovators have seen a vein to be exploited in the racing mania, and the game of the miniature horse race, an always popular pastime at bathing resorts, is only one of the more happy forms given to true races with a view of prolonging the excitement of betting, of the unexpected, and of chance, at times when genuine racing could be done only with difficulty and would attract too small a number of persons. The electric race course that we are now going to present to our readers occupies a place just between genuine races and the miniature horse race. It is, in fact, a happy alliance of genuine races, the game just mentioned, hobby horses and electricity. Taken as whole, it consists of a certain number of hobby horses, half natural size, each moving over a circular track under the influence of an individual motor and receiving the current of a single generator, but in an independent manner, thus securing a perfect autonomy to each courser, qualified, moreover, by the surveillance of the electrician who directs the steeds and makes a sort of despotic anarchy of them. The horses are ridden by children and even by grown persons, and it is in this that they resemble hobby horses, although the possibility of imparting different speeds to them permits of their being passed by competitors and of passing the latter in turn, thus increasing the excitement of the riders. Bets may be made, of which the chances are just as certain as those of the play of odd and even upon the numbers of the hacks traversing the boulevards.

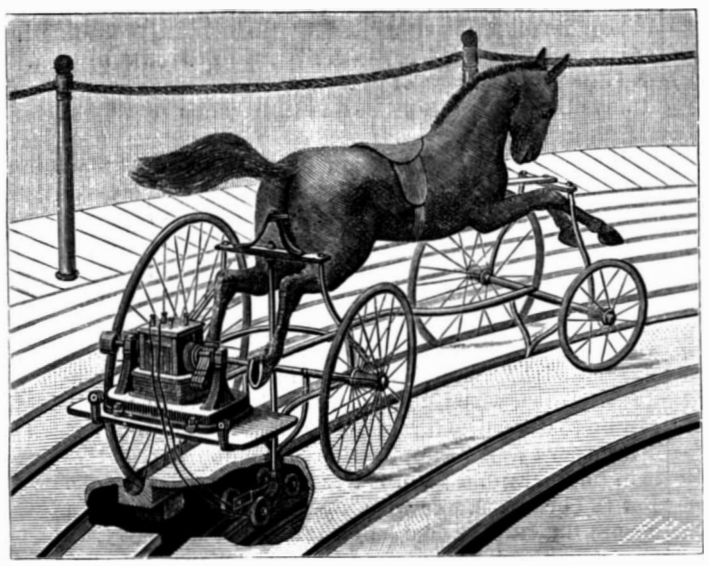

Fig. 2.—MECHANICAL HORSE.

Mr. Salle's race course constitutes an interesting application of the carriage and of the distribution of motive power by continuous currents. The installation realized at Nice (shown in Fig. 1) comprises a 12 horse power gas engine that actuates a Rechniewsky dynamo with double winding, which sends the current into six electric motors of a power of 1,000 watts each, mounted in derivation upon the machine and setting in motion a horse on wheels whose speed, starting and stopping, is, for each one, entirely independent of all the others.

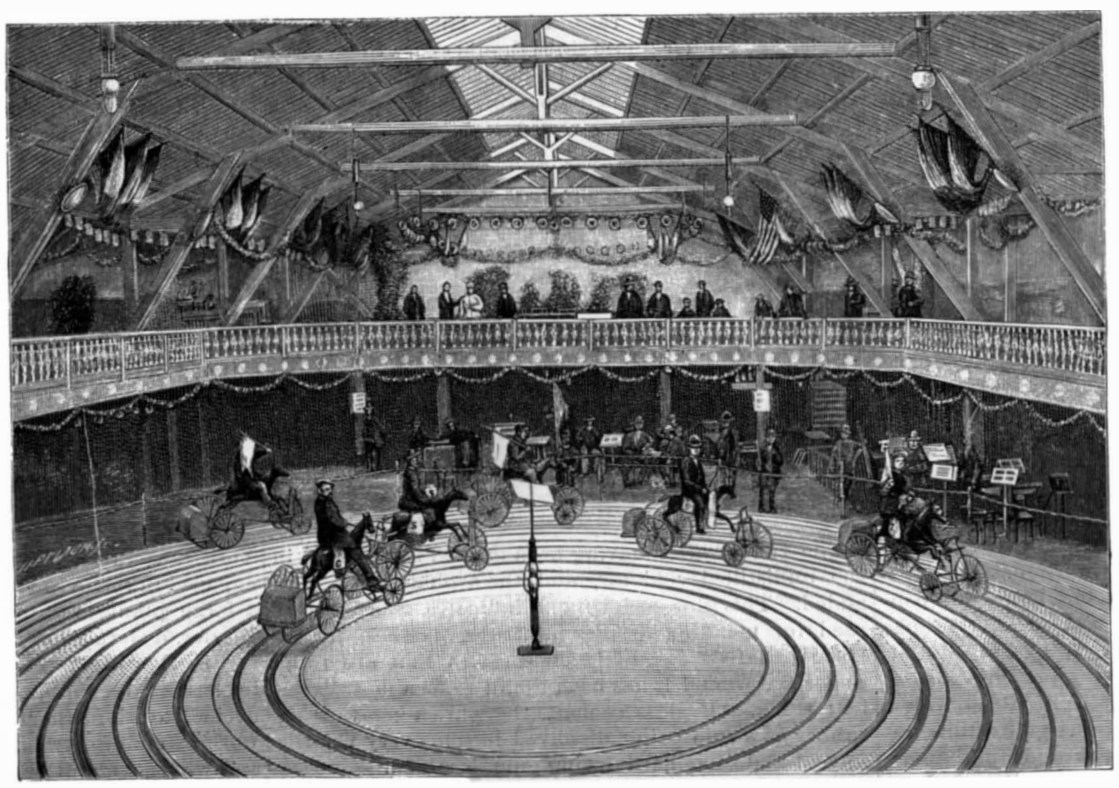

Fig. 1.—ELECTRIC RACE COURSE AT NICE.

About the motor and dynamo there is nothing peculiar. The electric motor—a dynamo of small size—is arranged behind each horse (Fig. 2). When the circuit of the dynamo is closed, all the horses start at once and take on relative speeds that are so much the greater in proportion as the circle upon which they are placed has a greater radius. The speed of each horse, moreover, can be regulated at will by means of a rheostat interposed in its particular circuit. An interrupter permits of stopping any horse whatever without interrupting the movement of all the others. All the motions are controlled from the post of the electrician, who, standing upon a lateral stage, overlooks the entire track, and can watch and regulate what takes place upon it, for, upon a horizontally arranged board, he has all the maneuvering pieces necessary for the play. These pieces are, in the first place, a main commutator that cuts the circuit from all the horses at once, then six individual commutators for each of the horses, six rheostats interposed in the respective circuits of the six motors and permitting of regulating the angular speeds of each horse, and finally an exciting rheostat of the dynamo machine that permits of varying the speeds of all the motors at once in the same ratio.

It is, therefore, possible, by maneuvering these different pieces, to regulate the general or particular gait of each horse, and to stop any one of the horses almost instantly if an obstacle falls upon the track or if one of the riders becomes suddenly indisposed.

The driving of the motive wheel by the motor is done by direct contact. To this effect the large wheel is provided with a rubber tire, against which the pulley of the motor bears. The friction thus obtained is sufficient to carry along the vehicle, which, with the rider, weighs a little less than 650 lb. The mean speed is 13 feet per second, but the horses placed at the circumference can obtain a speed of 16 or 18 feet, a velocity that is not prudent to exceed, nor even reach, on account of the difficulty the rider would have in holding himself in equilibrium and the feeling of dizziness that he might experience.

The vehicle upon which each horse is mounted merits special mention, because of the arrangements made to prevent upsetting. Each of the four wheels has a different diameter. Their two axles converge toward the center of the circular track upon which each horse moves, and the axis inclines toward the center.

Each pair of wheels, therefore, constitutes a true rolling cone whose apex passes through the central point of the track situated upon the horizontal rolling plane. The inequality of the wheels naturally makes it necessary to employ but a single driving wheel, and to mount the four wheels loose upon the axles. Owing to these arrangements no tendency to derailment has shown itself, even with speeds of 22 or 16 feet per second upon curves of 13 feet radius.

Two small rollers placed upon the track tend to prevent an upsetting under the action of a lateral thrust or a strong impulsion. The track consists of a single tram rail, with which engage the two external wheels. This rail serves as a guide and suffices to prevent derailment. The current is led to each motor by two rollers moving over two circular metallic bands in direct communication with the poles of the dynamo, through the intermedium of the maneuvering board, thus permitting of varying the speed of each of the horses, and even of stopping the latter by interrupting the circuit.

In a course organized with a view to betting, we proceed as in the miniature horse race. The six racers having been started at full speed, the current is suppressed from all the horses at the same instant. They continue to roll by virtue of the velocity acquired, and stop successively in variable positions on the course. It is the horse that stops nearest the goal, but does not get beyond it, that wins the race.

Such are the principal arrangements of the electric race course that was operated at Nice last winter. Mr. Salle, in the presence of the success obtained, is con-

© 1890 SCIENTIFIC AMERICAN, INC.

structing a larger model, which will form one of the attractions of the Exposition of Sciences and Arts that is to be opened next August at the Palace of Industry. —*La Nature.*

PHOTOGRAPHIC NOTES.

Correction of Eikonogen Formula.—We wish to correct a misprint in the first formula under "Various Eikonogen Developers," page 120 of the August 23d number, by substituting 40 for 4 ounces of water. The corrected formula will read:

Sodium sulphite (Merck's c. p. crystals)	2 ounces.
Eikonogen	1 ounce.
Water (distilled or rain water preferred)	40 ounces.

Belitzki's Formula for Removing Hypo from Gelatine Films.—A correspondent suggests a corrected formula which is said to work well:

Water	32 ounces.
Chloride of lime	300 grains.

Add to the milky liquid thus formed a solution of sulphate of zinc:

Sulphate of zinc	600 grains.
Water	3½ ounces.

Shake the mixture well and decant the clear solution. This supernatant solution of hypochlorite of zinc should be kept in a glass-stoppered bottle. One ounce mixed with sixty ounces of water will remove the last traces of the fixing soda. The solution remains active as long as it smells of hypochlorous acid.

The Photographers' Convention.—Among the papers read at the eleventh annual convention of the Photographers' Association, held at Washington, D. C., last month, was an interesting one on the "Automatic Operations of Photographic Apparatus," by Prof. D. P. Todd, Professor of Mathematics in Amherst College. He explained how a number of astronomical photo-instruments were automatically operated at different intervals by air pressure, regulated by valves which were called into action by the air passing through slits in a moving band of paper, very similar in appearance to the square holes and slits in music paper for small organs. By such means different instruments were given different exposures, and plates were automatically changed. Every second of time was utilized, and more exposures were made on one observation than would be possible if done in the old way.

Mr. G. Cramer, of St. Louis, read a paper on "Orthochromatic Photography," making the point that the best results in copying paintings, or colored objects, or in taking portraits of people with red hair and freckled faces, were obtained when the color dye was incorporated in the emulsion, and not when a yellow screen was used. The exposure required was twice as long as with the ordinary plate. Mr. T. C. Roche exhibited prints from orthochromatic negatives of a colored object, which demonstrated clearly their value. Plates thus prepared do not keep as long as those of ordinary manufacture.

Prof. Thos. Taylor, of the Agricultural Department, exhibited and set off, as against the usual magnesium compound, his new smokeless flash light compound, having for its principal ingredient the silky-like fibers of the milk weed plant. While his compound flashed with great rapidity, and could be flashed on a piece of tissue paper without burning it, the light emitted appeared to be more yellow in character and less actinic than the magnesium flash. Negatives were made separately by the aid of both lights.

C. H. Codman & Co., of Boston, were awarded a gold medal for the best photographic appliance. It consisted of a camera stand especially designed for studios. A platform is placed between two uprights hung by chains to coiled flat springs concealed in the top of each upright. The tension of the springs may be easily regulated to correspond with the weight of the apparatus put on the platform. Thus the same is balanced, and may be lowered to within thirteen inches of the floor or raised six feet high at will. In photographing children it is desirable to lower the camera sufficiently that the lens may be opposite their faces, and thus avoid a downward view.

Many varieties of hand cameras, backgrounds, photographic furniture, special exposing devices for bromide paper, lenses, camera shutters, burnishers, trays, and other useful things were on exhibition.

The display of photographs was not large, and consisted mostly of portraits. The grand prize, a bronze group, was awarded to Geo. W. Hastings, of Boston, Mass., for the best photographic representation of Tennyson's poem "Enoch Arden." A number of other prizes were awarded for the best foreign exhibits, retouching, enlargement, marine views, and landscapes.

Combined Celluloid Negatives.—According to the *Br. Jour. of Photo.*, more harmonious photographs can be obtained by making duplicate negatives of a given subject. It says:

"Celluloid films will frequently prove a great advantage for outdoor groups. Apart from the convenience with which an objectionable portrait in one negative can be exchanged for another from a different one, it often happens that a group has to be taken with a background that requires a different exposure from that for the figures; for example, a wedding party or team of cricketers in light costume against a background of dark foliage. Here we have the opportunity of taking one or more negatives, giving the exposure best suited for the figures, and afterward taking another in which the exposure is timed entirely for the background. Negatives thus taken are readily combined, and a harmonious whole secured; whereas, if only a single negative is depended upon, under the above conditions, unless exceptional skill is exercised in the exposure and development, either the background proves too heavy and lacks detail or the figures are too light or chalky.

"It is scarcely necessary to remind our readers when taking group negatives, which may afterward have to be combined, that neither the lighting nor the position of the camera should be altered between the taking of the different pictures, or that the same exposure should always be given; otherwise an incongruous result will necessarily obtain.

"Here is another direction in which celluloid films may prove of utility. In photographing the interior of a cathedral or church, for instance, the exposure necessary for one portion of the building, say the stalls or pews in the foreground, is generally widely different from that required for another, such as the chancel and windows. But one negative can be taken, exposing for the foreground, another with the exposure timed for the chancel, and even a third for the windows. Then, with judgment, the different negatives can be combined to form one harmonious picture."

Another excellent application of the double negative is in photographing a brook or rill under deep foliage. For the brook, expose with the shutter, then make a second time exposure of half a minute, if necessary, to bring out the details of the rocks and foliage. By combining the two negatives a harmonious picture is produced.

Proposed Convention of Amateur Photographers.—The Syracuse (N. Y.) Camera Club has undertaken the organization of a National Association of Amateur Photographers, the object of which, as stated in their circular, "is to diffuse a more widely spread scientific interest in the science of photography and to promote social intercourse among amateurs." Photography is now being practiced so universally, both for pleasure, profit, and in many branches of science, that it seems eminently proper for all thus interested to combine and support a national organization designed to promote the art simply as an art and science. We wish that the movement might be a success, and that under the fostering care of such an association there might be established an experimental "photographic college," where a reliable education in any one branch of photography can be obtained. Amateurs interested in the movement should address Mr. Arthur P. Yates, president of the Syracuse Club, Syracuse, N. Y.

Daguerre's Tomb.—While in this country an enduring and artistic memorial has been erected to Daguerre, news comes that his tomb at Cormeil-en-Parisis appears to be quite neglected. Says Leon Vidal about it, in the *Photo. News:* "The cure of this commune has informed the Photographic Society of the fact. The painting executed by Daguerre in the choir of the church requires considerable restoration. The Photographic Society and other photo clubs should cause these restorations to be promptly made, and thus conserve for all time the memory of the discoverer of photography."

Cements of Rubber and Gutta Percha.

In making a cement, one should know pretty thoroughly, says the *Rubber World*, what is to be expected of it before they could advise upon it. For instance, an ordinary rubber cement will hold on a host of different surfaces and with the best of success, except where there is continued dampness. For holding to damp walls, or surfaces where there is a constant presence of moisture, there is nothing equal to Jeffry's marine glue, the formula for which has been published and republished all over the world. It consists of:

1 part India rubber.
12 parts coal tar.
2 parts asphaltum.

The rubber after having been massed is dissolved in the undistilled coal tar, and the asphaltum is then added. This glue, as its name indicates, is oftentimes used for mending articles at sea, or patches, for instance, that are to be laid on surfaces that are to be under water, and it has been found to be a most excellent thing. Of glass cements there are a great many, rubber as a rule being dissolved in some very volatile solvent and some hard drying gum is added.

A gutta percha cement for leather is obtained by mixing the following. It is used hot. Gutta percha, 100 parts; black pitch or asphaltum, 100 parts; oil of turpentine, 15 parts. An elastic gutta percha cement especially useful for attaching the soles of boots and shoes, as on account of its great elasticity it is not liable to break or crack when bent. To make it adhere tightly the surface of the leather is slightly roughened. It is prepared as follows: By dissolving 10 parts of gutta percha in 100 parts of benzine. The clear solution from this is then poured into another bottle containing 100 parts of linseed oil varnish, and well shaken together.

Good rubber cement for sheet rubber, or for attaching rubber material of any description or shape to metal, may be made by softening and dissolving shellac in ten times its weight of water of ammonia. A transparent mass is thus obtained, which, after keeping three or four weeks, becomes liquid, and may be used without requiring heat. When applied it will be found to soften the rubber, but when the ammonia is evaporated it forms a kind of hard coat, and causes it to become both impervious to gases as well as liquids.

Davy's universal cement is made by melting 4 parts of common pitch with 4 parts of gutta percha in an iron vessel and mixing well. It must be kept fluid, under water, or in a dry hard state.

A very adhesive cement, especially adapted for leather driving belts, is made by taking bisulphide of carbon 10 parts, oil of turpentine 1 part, and dissolving in this sufficient gutta percha to form a paste. The manner of using this cement is to remove any grease that may be present in the leather by placing on the leather a piece of rag and then rubbing it over with a hot iron. The rag thus absorbs the grease, and the two pieces are then roughened and the cement lightly spread on. The two pieces are then joined, and subjected till dry to a slight pressure.

A solution of gutta percha for shoemakers is made by taking pieces of waste gutta percha, first prepared by soaking in boiling water till soft. It is then cut into small pieces and placed in a vessel and covered with coal tar oil. It is then tightly corked to prevent evaporation, and allowed to stand for twenty-four hours. It is then melted by standing in hot water till perfectly fluid, and well stirred. Before using it must be warmed as before, by standing in hot water.

A cement for uniting India rubber is composed as follows: 100 parts of finely chopped rubber, 15 parts of resin, 10 parts of shellac; these are dissolved in bisulphate of carbon.

Another India rubber cement is made of: 15 grains of India rubber, 2 ounces of chloroform, 4 drachms of mastic; first mix the India rubber and chloroform together, and when dissolved the mastic is added in powder. It is then allowed to stand by for a week or two before using.

Cement for sticking on leather patches and for attaching rubber soles to boots and shoes is prepared from virgin or native India rubber, by cutting it into small pieces or else shredding it up; a bottle is filled with this to about one-tenth of its capacity, benzine is then poured on till about three parts full, but be certain that the benzine is free from oil. It is then kept till thoroughly dissolved and of a thick consistency. If it turns out too thick or thin, suitable quantities must be added of either material to make as required.

An elastic cement is made by mixing together and allowing to dissolve the following: 4 ounces of bisulphide of carbon, 1 ounce of fine India rubber, 2 drachms of isinglass, ½ ounce of gutta percha. This cement is used for cementing leather and rubber, and when to be used the leather is roughened and a thin coat of the cement is applied. It is allowed to completely dry, then the two surfaces to be joined are warmed and then placed together and allowed to dry.

Cement used for repairing holes in rubber boots and shoes is made of the following solution: 1. Caoutchouc 10 parts, chloroform 280 parts. This is simply prepared by allowing the caoutchouc to dissolve in the chloroform. 2. Caoutchouc 10 parts, resin 4 parts, gum turpentine 40 parts. For this solution the caoutchouc is shaved into small pieces and melted up with the resin, the turpentine is then added, and all is then dissolved in the oil of turpentine. The two solutions are then mixed together to repair the shoe with this cement. First wash the hole over with it, then a piece of linen dipped in it is placed over it; as soon as the linen adheres to the sole, the cement is then applied as thickly as required.

American Machinery at the Iron Gates of the Danube.

The Ingersoll-Sergeant Rock Drill Company, of New York, has just received an order, from the contractors engaged in removing the Iron Gates of the Danube, for a large plant of submarine drilling apparatus. Mr. Bessier, a German engineer, recently visited this country, in the interests of the work on the Danube. He investigated thoroughly our American methods, and decided to adopt them as the best for the purpose. The work extends for twenty miles along the Danube River, and will cost about $5,000,000.

The removal of these obstructions has been attempted many times, one of the Roman emperors having made an effort to remove the rock. Recently an Austrian empress made a similar attempt, but without success. We have every reason to believe that American machinery will do the work economically and well.

THE expenditure for pensions for the year ending June 30, as now officially stated, amounted to $109,357,534. In the previous year we paid $87,644,779.11, while in the year before that we paid $80,288,508.77.

© 1890 SCIENTIFIC AMERICAN, INC.

Steel Railway Ties.

Experiment is being made by the Delaware and Hudson Railroad Company to test the adaptability and superiority of steel ties for railroad uses. On a section of the road leading south from Ballston for nearly half a mile, the wooden sleepers have been removed and the track reconstructed with the steel ties. So far they give good satisfaction. As trains pass rapidly over this piece of road, a peculiar buzzing noise is noticeable, also the vibration caused by the wheels upon the rails is observably greater; but it is also the smoothest and pleasantest riding piece of road between Troy and Saratoga. The test of the safety and adaptability of the steel ties is being made under the supervision of A. J. Swift, chief engineer of the road, and they will be adopted or rejected upon his recommendation.

So far he regards the steel ties as a success; but no more will be laid until those now in use have had the test of the winter to see in what manner, if any, they will be affected by ice, frost, and snow, and if they are equally safe in clay and quicksand and gravel. If they stand all these tests, Mr. Swift has no doubt of the steel ties being speedily adopted for general use as the old wooden sleepers need to be replaced. The objection of their greatly increased first cost is fully met and overcome by their durability. Of their greater safety, if they stand the test, there can be no doubt, as by their use it is impossible for the rails to spread or in any other manner to become displaced. They also give to the track the perfect effect of a continuous rail. The steel ties are in shape an inverted "T." They are seven feet long, seven inches wide, and are laid twenty-two inches apart from centers. At either end of the tie is a socket, in which is laid a block of wood, four by five inches square and about sixteen inches long, and upon which the rail is laid and firmly held in place.

AN IMPROVED SWITCH WORKER.

The accompanying illustration represents a device adapted for attachment to street railway cars and similar vehicles, and so constructed that the driver may with one hand, and without interfering with his regular duties, readily open or close a switch in the path of the vehicle, the part of the device contacting with the rails, when released, automatically leaving the switch and taking a position some distance above the track. In a suitable casing, adapted to be arranged vertically over one rail of the track in the end of the car body, is held to slide a bar having a central bore, in which a downwardly projecting switch rod is adjustably secured by a thumb or other screw. The lower end of this switch rod may be simply wedge-shaped, as shown in one of the views, or a beveled wheel may be mounted therein, as shown in the small view. The vertical bar in which the switch rod is secured is normally spring-held at the desired height above the track, but is pushed downward to move the rail by a rack and gear wheel operated by a hand lever within convenient reach of the driver. On the upper end of this bar is a beveled gear, meshing into other gear, and operated

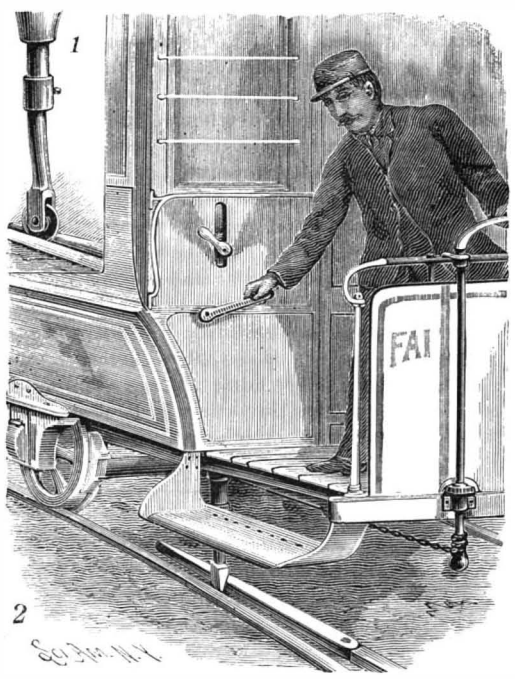

HEITMEYER'S SWITCH WORKER.

by another hand lever, whereby the vertical bar and its attached switch rod may be turned through one-half of a revolution. By this means the wedge-shaped end of the switch rod, or the beveled wheel thereon, may be turned to engage the switch rail of an open switch when it is desired to close the same.

For further information relative to this invention, address the patentee, Mr. H. G. Heitmeyer, 474 Race Street, Cincinnati, O.

AN iron elevated railway, much like the New York pattern, six miles long, is now in process of construction in Liverpool. The cars are to be worked by electricity.

AN IMPROVED NUTMEG GRATER.

The illustration represents a simple device by which a nutmeg or similar substance may be ground as used and shaken as pepper is shaken from a common pepper box. It has been patented by Mr. Cassius M. Maxson, of Allentown, N. Y. The cylindrical part of the grater may be made of porcelain, glass, wood, or any other suitable material, and decorated to look neat and attractive. The ends are closed with caps, screwed or otherwise fastened on the body, one of the caps being perforated while the other forms a bearing for a small crank shaft, to the inner end of which is secured a

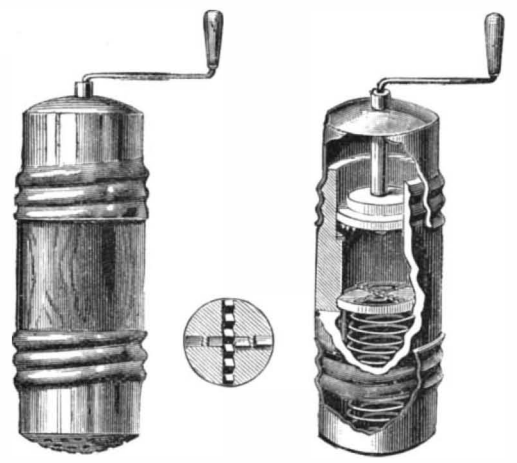

MAXSON'S NUTMEG GRATER.

grinding disk, shown in the small sectional view. The opposite grinding disk has a longitudinal movement upon ribs on the inner side of the body, and is held pressed against the nutmeg, and pressing the latter against the other grinding disk, by a coiled spring. A portion of the teeth in each grinding disk are arranged to cut grooves in the nutmeg, the other teeth cutting off the ridges thus formed, while in the lower disk are openings through which the grated nutmeg may pass to the openings in the lower cap. To insert the nutmeg, this cap, the spring, and the lower disk are removed, the parts being afterward returned to working position, as shown.

Spontaneous Combustion of Hay.

After a series of very careful experiments, Prof. Cohn, of Breslau, has found that the heating of damp hay to a temperature sufficient to cause the spontaneous combustion of it is due to a fungus. He first studied the heat-generating action of *Aspergillus fumigatus*, which has the bad reputation of heating barley in the course of germination and of rendering it sterile. Through the effect of the respiration of the little germ, that is to say, through the combustion of the starch and other hydrocarburets which the diastasic ferment converts into maltose and dextrine, the temperature is raised by about 40°. The heating of the germs to more than 60° occurs only through the intervention of the *Aspergillus*, which acts as a ferment. Under these conditions it reaches its greatest development and produces its maximum action. In this state it rapidly burns the hydrocarburets.—*La Petite Revue.*

Our Latest New Steel Cruiser.

The San Francisco, a sister ship of the Philadelphia, built at the Union Iron Works, San Francisco, had her trial trip in the Santa Barbara channel, on the California coast, on the 27th of August, with results which were extremely gratifying to her builders, as well as to the Bureau of Construction of the Navy Department, after whose plans she was built. The run was for four consecutive hours, during which time the average speed maintained was 19·516 knots per hour. During a portion of the run, however, the water got into the ducts which supply the current of air used in a forced draught, and the fans began to force water into the furnaces. This caused a material loss of speed, and it is claimed that, making a proper allowance for this accident, the average speed would exceed 19·7 knots per hour, which would make the record of the San Francisco higher than that of the Philadelphia. The contract for the vessel provided that the builders should receive $50,000 additional for each one-quarter knot attained over 19 knots per hour, and they therefore earn $100,000 over the contract price, which was $1,426,000.

This is the second vessel of our new navy which has been built upon the Pacific coast, the Charleston having had her trial trip a few months ago, and all the castings made there, and the finish and staunchness of the vessels have been declared to be as perfect as ever went into an American ship. Experts declare that the San Francisco has finer lines than those of any other vessel of the new navy, and that for this reason, and the strength of her boilers, she should also be the swiftest vessel among the new cruisers.

The dimensions of the San Francisco are: Length over all, 328 ft.; length on load line, 310 ft.; breadth, 49 ft.; draught forward, 16 ft. 9 in.; draught aft, 20 ft. 11 in.; displacement, 4,038 tons; horse power, natural draught, 7,500 horse, forced draught, 11,000 horse. The vessel has a protective deck for its full length, sloping down to its sides about four feet below the water line, the sloping sides being two and a half inches thick and the top portion one and a half inches thick. The machinery and all the vital parts of the ship are below this deck, under which, along the sides, the space is used for coal bunkers. The vessel also has a double bottom and many water-tight compartments. She is driven by two three-bladed built-up screws of fourteen feet diameter each, and two horizontal triple expansion engines. She has three hollow masts with two military tops for Gatling guns, and her armament will consist of twelve six-inch breech-loading rifled guns, four Hotchkiss revolving cannon, one one-pounder rifle, and two Gatling guns. She will require a crew of 300 men.

AN IMPROVED BOB SLED.

The illustration represents a novel construction of bob sleds, designed to provide for a uniform movement of both the forward and rear sleds in turning corners, and by which a minimum of strain will be exerted upon the several parts of the sled. It has been patented by Mr. Jesse Yenne, of Egan, Montana. The forward ends of the runners of each sled are pivotally connected by a cross bar, the cross bars having reduced ends seated in essentially dovetailed recesses, whereby the runners are capable of a limited independent longitudinal movement. Upon the upper face of each runner a rave is rigidly secured, of somewhat triangular shape, in the upper flat part of which is an elongated slot or opening. Directly under this slot a plate having a central opening is bolted to the upper surface of the runner, and in each runner, below the opening in the plate, is an essentially dovetail recess, the widest portion of which is at the bottom. In the main bolsters at each end is secured a pin, the upper end of which passes through and slides in the slot of the rave, while the lower end of the pin enters the dovetail recess in the runner. A sand bolster is pivoted upon the main bolster in the usual manner, but when the main bolster only is used, it is made in two sections, the upper surfaces of the raves then passing through recesses in the opposed faces of the bolster sections. The forward end of the reach bar connecting the sleds is connected to the front cross bar of the forward sled, its rear end passing through an opening in the main bolster of the forward sled, and having a slot through which passes the pivotal pin of the sand bolster. Each cross bar of each sled has a rigidly attached tongue, the tongue of the rear sled being attached to the rear end of the reach bar. Upon the cross bar of the forward sled, and also upon its tongue, a block is rigidly fastened with staples, one of which passes through the forward end of the reach. This attachment is designed to facilitate loosening the rear sled should its runners become frozen to the ground, by throwing up the tongue to turn the forward cross bar, and thus force the reach rearward to act as a lever upon the tongues of the rear sled. The construction is such that the bolsters have movement upon the raves and in the runners, while the reach is capable of lateral movement, the peculiar connection between

YENNE'S BOB SLED.

the cross bars and runners being designed to permit the runners of the sleds to run in parallel lines, one in advance of the other.

The Electrical Telegraph.

In 1747 Bishop Watson sent the discharge of a Leyden jar through 10,600 feet of wire suspended on poles on Shooter's Hill, and a plan for an alphabetical telegraph to be worked by electricity appeared in *Scots Magazine* for 1753, which, however, seems never to have been realized. At Geneva, in 1774, a telegraph line was erected by Lesage, consisting of 24 pith ball electroscopes, each representing a letter.—***M. Farrant,*** *Science Gossip.*

© 1890 SCIENTIFIC AMERICAN, INC.

Electric Launches.

An interesting essay on this subject has lately been contributed to *The Electrical Engineer* by Fred. Reckenzaun, from which we make the following abstract:

Electrical navigation was an experimental fact, not a mere idea, over half a century ago. Being first conceived and demonstrated by Prof. Jacobi in Russia, during 1838, his fascinating achievement was followed up in England by Robert Hunt early in the fifties, by G. E. Dering in the year 1856, and in France by Count De Moulins in 1866. In all these experiments electromagnetic motors and primary batteries of various descriptions were employed to actuate the propeller. The results obtained, although demonstrating the possibility of electrical navigation, failed, however, to prove its commercial feasibility. With the storage battery in place of the primary battery and a new type of electric motor in place of the old ones, the electric launch entered upon a new era.

Trouve availed himself of these improvements in 1881 in Paris, but also employed a primary battery of his own. His experiments were the first with storage batteries and the last notable ones on record with primary batteries. In 1882 the Electrical Power Storage Company, of London, brought out the launch Electricity, designed by Anthony Reckenzaun. During the years following, electric launch building gradually developed into a distinct branch of electrical industry, especially in England, where the advantages of this class of craft for pleasure purposes have met with such increasing appreciation and favor as to cause the establishment of a series of charging stations along the Thames River (by Messrs. Immisch & Co.), where a whole fleet is in use now, while a regular passenger service by electric boats has quite recently also been introduced at Edinburgh, Scotland.

The storage battery, on account of its superior fitness, is universally employed in connection with electric launches at present.

Since the power required to propel a vessel varies as the cube of the speed, and since the duration of the run varies inversely as the power (rate of delivery), it follows that the *mileage* covered by one charge of battery will vary inversely as the *square* of the *speed*. In practice, due allowance is to be made for the characteristics of the motor and for a falling off in the total output of the battery when pushed to a high rate of delivery. Where a maximum of speed is to be effected, the battery should have a maximum of active surface and a minimum of internal resistance, to facilitate a heavy discharge without an excessive drop of potential. Special care should be taken to render the cells acid tight, by the use of suitable covers, etc. Spilling may also be avoided by preparing the electrolyte in a suitable manner. The jelly electrolyte invented by Dr. P. Schoop offers in this respect a remarkable advantage. It is also advisable to line the battery receptacle with some acid-proof material, preferably an insulator, and to provide a bed for the cells to stand on containing a substance capable of absorbing and neutralizing acid. All wires or cables employed about the boat should have a good acid and salt-water proof insulation.

Where a continuous current incandescent lighting plant exists, current may be derived therefrom for charging purposes; suitable arrangements must, of course, be made in such cases for the proper application of the current, the E. M. F. of which may not always correspond with that of the battery.

Storage batteries, suitable for launch purposes, are, as a rule, capable of receiving their charge at a higher rate and in less time than the employment of most arc light currents would involve; this is one reason why incandescent light currents (continuous, low tension) are preferable. But arc light plants are the ones most frequently met with, and may often be the only source available. It should be remembered, however, that with a high tension current (say 1,000 volts and over) an electric launch, floating in water, would not unlikely prove an inducement to "grounding."

The battery may, of course, be charged either on the boat or may be removed for that purpose. While the former method is ordinarily practiced, it is obvious that in order to avoid delay, a freshly charged battery may be substituted for the exhausted one. With suitable facilities for handling the batteries, such as a hoisting crane, or equivalent device for lifting and lowering the cells into and out of the boat, tables to receive the cells for charging, suitable cell crates with connections and lifting attachments, etc., the work of exchanging the batteries could be effected promptly and efficiently for a whole fleet engaged in continuous traffic.

The operation of an electric launch is the ideal of ease and simplicity. It consists, practically, of turning a switch and—letting her go. The pilot can act at the same time as engineer, for he can start, stop or reverse as easily as he may give a signal for that purpose, and need not wait for a response. Somebody, on noticing the incomparable facility with which an electric launch can be operated, suggested it was a veritable "buggy on the water." It certainly involves none of the jarring which inevitably accompanies a buggy ride on land, and there is no need for "cheering up" or "urging" the animal. Not one of the smallest advantages is the fact that there is no danger of explosion. The most reckless handling of the propelling apparatus would entail nothing worse than its disablement, and as to danger from shock, it is unnecessary to explain its absence here. The run may be continuous or interrupted; a landing may be effected and the boat left without attendance for any desired length of time, and the journey resumed at a moment's notice. Knowing the number of miles or hours the boat can run with one charge, the man in charge will be guided thereby, as is the engineer of a steam launch by his pile of coal, and probably more definitely. The disagreeable features of steam and naphtha launches (aside from their danger of explosion), such as smoke, smell, soot, ashes, dirt, grease, heat, noise and the jerking caused by the reciprocating motion of the engine, are totally absent in the electric launch. The propelling machinery has substantially but one moving part and the motion of that is rotary, insuring smoothness, quietude and ease, and involving but a minimum of wear, while the liability to a breakdown is very remote. There is no necessity for the grimy man with dirty overalls—his place is on shore, at the charging station. The battery, besides doing its regular duty in operating the motor, can, of course, be employed at night to furnish current for interior illumination, side and signal lights, head light—a search light, if you please—or for submarine illumination.

Where a fleet of electric launches is operated, the pro rata cost of plant and expense of operation can be brought within very reasonable limits. Instead of having an engineer for each boat (as in the steam launch), one station engineer can render equivalent service for a number of boats. The fuel item for one station engine need not exceed, and may be even smaller than, the aggregate consumption of several small engines (on steam launches), even allowing for the loss in conversion. The actual running expense would thus compare favorably with that of steam launches. There is another feature which should not be overlooked. In an electric boat, as pointed out before, the propelling apparatus occupies space which would be of little or no use for passengers, while in steam or naphtha boats from one-third to one-half of the entire space is devoted to the machinery, and the best part of the boat at that, crowding out a proportional number of passengers. For a given number of passengers, therefore, the electric launch would be smaller, require less power, and consequently would cost less to run. Under such conditions, it would hold its own even on the point of expense, taken all in all.

The estimate of cost of a fleet of 12 electric launches, each 28 feet long, 6 feet beam, carrying one ton of storage batteries, to run 6 miles per hour for 60 miles with one charge, is as follows:

12 hulls complete, with interior fittings (battery troughs, seats and lockers), fixed roofs, shades, flag staffs, steering wheels, etc.	$6,600
12 tons storage batteries (cap. 16,240 watt hrs. per ton) at $560 per ton	6,720
12 motors, at $400	4,800
12 screw propellers, shafts, couplings, thrust bearings and stuffing boxes	1,200
Switches, wires, incand. lamps (4 per boat), with fittings	480
Acid and labor of placing elec. outfit	1,200
Seat cushions, ropes, boat hooks, tools, pumps, etc.	300
Total, 12 boats complete, in running order. or $1,775 each.	$21,300

CHARGING STATIONS.

Land and buildings (on suburb. water front) say	$4,000
Steam plant, 60 h. p. complete, erected	4,000
Dynamo, cap. 40,000 watts, with accessories, erected.	2,000
Charging circuits and appliances, erected	250
Mooring facilities, tools, etc.	500
Total cost of station, say	$10,750
Grand total cost of 12 launches with charging facilities and real estate	32,050

ESTIMATED COST OF OPERATION.

It is assumed that each of the 12 launches makes a daily run of 60 miles, divided into 6 trips of 10 miles each (3 round trips), during 5 *months* in the year:

12 pilots at $2.50 per day each, for 5 months	$4,500.00
1 station engineer, at $3 per day for 5 months	450.00
1 station fireman at $2 per day for 5 months	300.00
1 station laborer at $1.75 per day for 5 months	262.50
Coal (4 lb. per h. p. hour, 60 h. p. for 7 hrs. daily), 112½ tons (for 5 months) at $4 per ton	450.00
Oil, waste, miscell. supplies and incidentals for 5 months, say	200.00
Labor, etc., putting boats in running order at beginning and storing same at end of season, say.	360.00
Depreciation, per annum, on boats and propelling apparatus, at 10 per cent on $21,300	2,130.00
Depreciation of station machinery and appliances, at 6 per cent per annum on $4,750	285.00
Interest, per annum, at 6 per cent, on interest of $32,050	1,923.00
Total operat. expense, deprec'n and interest. or $905.04 per boat per annum.	$10,860.50
Total mileage run per boat per month (60 per day)	1,800 miles.
Total mileage run per boat in 5 months	9,000 "
Total mileage run, 12 boats, at 9,000 miles each.	108,000 "

Cost of operation, including running expenses, depreciation and interest, as per above estimate, $= 10\frac{5}{100}$ cents per boat mile. The boats assumed can seat 20 passengers and over. If an average of only *one-half* of this number is constantly carried, paying fare at the rate of *one cent per mile* each, the receipts will equal the operating expense, depreciation and interest on investment, as above.

The boats, in this instance, run at intervals of about 17 or 18 minutes (allowing for short stops), 1⅔ miles apart, along the entire distance of 10 miles.

The cost and operating expense of electric launches will, of course, vary with different sizes and speeds, which the conditions and requirements of each distinct case contribute to determine.

A Terraced Mountain.

During the recent visit of Jesse R. Grant and Chas. J. Whimple to Sonora, Mexico, they were much struck with the sight of a terraced mountain. It was located about fifty miles southwest of Magdalena. The mountain is circular in form, about three-quarters of a mile in diameter and terraced from base to peak. The height of the terrace is from ten to twelve feet, and in many places is built of solid masonry. At many other places it is cut out of the solid rock. The roadway is from fifteen to twenty feet in width, starting at the base of the mountain and coiling itself spiral-like to the peak of the mountain, which is not less than 1,200 feet higher than the base of the mountain. The cost of the construction and cutting out of the solid rock of this terraced road must have been enormous, and the remarkable feature of this wonder is the state of its preservation. Here and there masonry has yielded to the crumbling influences of time, but these are exceptions.

At the base of this terraced mountain is a mighty rock, which has the appearance of having been hewn out of a solid rock, and weighs 100 tons or more. It is placed at the mouth of what appears to be the entrance to this terraced mountain. Here another query is suggested. Does this door to the mountain open the way to mineral treasure or to the shrine of ancient religious devotees? Again, does the terraced road which coils itself to the peak of the mountain lead to the shrine of the ancient vestal virgin who kept eternal watch on the sacred fire which was never suffered to die?

One thing is certain, there is a wide field for those near at home who wander far into Egypt and Persia to study the mysteries of the hidden past.—*Tucson Sun.*

Progress of the Niagara Falls Water Power Scheme.

Prof. Coleman Sellers was made consulting engineer of the Cataract Construction Company, some six months ago, and is now in England in consultation with some of the most prominent engineers, constituting a commission to decide upon plans for utilizing the water power of Niagara Falls.

Of this international commission Sir Wm. Thomson is the president; Prof. Sellers represents America; Prof. Mascart, France; and Theo. Tourit, Switzerland.

This Cataract Construction Company has secured a large area of land (several square miles) on the Niagara River, beginning a mile and a half above the falls, and all rights of way for carrying a tunnel under Niagara Village to a point below the falls.

The general plan is to construct a tunnel about 27 feet in diameter from a point below the falls to the upper limit of the secured property.

This tunnel will have lateral branches at a depth of about 100 feet from the surface, into which will be sunk numerous vertical shafts at the points where power will be required. A system of surface canals will bring the water of the river to the heads of these shafts, and its action on turbines at the lower ends of the shafts will develop the power, estimated we believe, in the aggregate, at about 150,000 horse power. The amount of water diverted for this purpose will be a small fraction of one per cent of that going over the falls.—*Stevens Indicator.*

A Luminous Buoy.

Experiments with a luminous buoy invented by M. Dibos have been made at Havre. By improvements, effected since a previous experiment, in the arrangement of the phosphuret of calcium in the apparatus, the inventor has obtained fewer intermissions in the production of the light and a prolongation of the duration. A first buoy, thrown into the channel opposite the semaphore, emitted a powerful light upon coming in contact with the water. During this time a boat left the harbor, and when about a mile and a half out, another of the buoys was thrown into the water, which lit up the sea within a very large radius. The power of the light was such that the men at the lighthouse, two miles and a half distant, saw it clearly with the naked eye. It has, besides, been proved in former trials that the light can be seen at a distance of five and a half miles. The French authorities intend making trials of lighting the channel on the Seine, from the Amfard Bank to where the dikes commence, by means of decked boats with masts about two meters high, on the top of which will be placed a light of this kind.

© 1890 SCIENTIFIC AMERICAN, INC.

RECENTLY PATENTED INVENTIONS.

Engineering.

THROTTLE VALVE. — Edward Leslie, Orangeville, Ontario, Canada. This valve has a movable gate with a closed recess, and a port connecting the recess with the steam inlet, in connection with an auxiliary valve, whereby the gate will be held locked on its seat by the full boiler pressure, of which the gate is relieved at the time the operator desires to open the valve.

EQUALIZER. — Edward Leslie, Orangeville, Ontario, Canada. This device consists of a tube or casting arranged for connection with both ends of a cylinder, and having an automatic valve in a valve chamber from which an auxiliary tube leads to the main tube, so that when the throttle is closed, and the cylinder once filled with air, the air is forced backward and forward and no undue suction is brought to bear on the valve, the cylinder and steam box not being cooled off, as when a fresh supply of cool air is drawn in and forced out at every reciprocation of the piston.

PROPELLER SHAFT AND MECHANISM. —Francis W. Pool, St. Paul, Minn. This invention relates to means designed to rapidly drive a propeller shaft with but little friction, the shaft having spirally arranged grooves in opposite directions on its surface, and a sleeve thereon having fixed heads with teeth on their inner faces, while loose rings in the sleeve have teeth on their outer edge, the inner surface of the rings having lugs engaging the grooves of the shaft, and reciprocating piston rods being attached to the outer surface of the sleeve.

Electrical.

PORTABLE SIGNALING DEVICE.—Peter Pearson, New York City. This is a device embodying a bell and mechanism to operate it intermittently when electrical connection is established and broken, the apparatus being held in a box, the lid of which must be closed to complete the connection between a bell on the lid and a battery in the box, insulated wires extending from the box to any point from which signals are to be sent in open circuit, which is closed and opened at proper intervals by a transmitter of peculiar construction.

Mechanical.

SAW HANDLE.—Richard W. Clemson, Middletown, N. Y. This handle has a straight hand grip and a straight finger extending below the hand hole and body of the handle in line with the hand grip, to permit of placing the hand in various positions relative to the cutting edge of the saw, give ample room to the hand, and allow for using on small saw handles having a size bearing a proper relation to the width and length of the saw.

SAW GUIDE.—John E. Bill, Evansville, Ind. This is a guide for circular saws in which an adjusting sleeve is turned by a hand wheel, whereby the guide arms can be separately and quickly adjusted to get the exact required distance between them, the guide arms, when properly adjusted, being held parallel by a movable pin secured in place by a thumb screw.

PIPE WRENCH. — James L. Taylor, Memphis, Tenn. This is a self-adjusting wrench in which the fixed jaw has combined with it a pivoted serrated jaw controlled by a spring and adapted to slip or yield when working the wrench back, but having a firm grip when operated in the opposite direction, and being without the disadvantages of a ratchet wrench, the device being inexpensive, strong and durable, and adapted for a wide variety of work.

ROD PACKING.—Wesley H. Richmond, Cadillac, Mich. This invention covers an improvement in that class of metallic rod packings in which a beveled split ring surrounds the sectional packing rings proper, and serves to press them inward, and thus hold them in close contact with the piston rod.

CRUSHER AND PULVERIZER.—William H. Howland, Bergenfield, N. J. This is a stone and ore crusher designed to provide for the bodily adjustment of the movable jaws and of their lower edges, and to equalize the strain upon the driving shaft, the machine being adapted to crush and pulverize the material to any required degree of fineness without becoming impregnated with metallic particles torn from the surface of the operating jaws.

HYDROCARBON BURNER. — Ethan Rogers, Ballston Spa, N. Y. This is a burner more especially adapted for burning crude oil as a fuel for forges, and combined with the inclosing tube or casing is a longitudinally corrugated tubular lining open at both ends, and an oil supply pipe provided with a spreader located at the inlet end of the corrugations.

Agricultural.

STALK CUTTER. — Paul E. Erickson, Scandia, Kansas. This cutter consists of a carriage to the axle of which a gear wheel is fixed, a pair of vertically rotating intersecting cutters being mounted in a suitable frame suspended from the axle, with a lever mechanism for fixing the position of the cutter frame, and a gathering device, the machine being designed to rapidly cut the standing stalks in a field in such manner that they may be easily plowed under.

COTTON CHOPPER.—James Casey and Stephen A. Morgan, Lehigh, Indian Ter. This is a machine specially designed for chopping new cotton to a stand in a row, and has a rotating shaft carrying a fixed block, with knives arranged to slide therein and rotating therewith on the shaft, in combination with an operating lever and connections between the knives and lever for operating them from the lever, the stalks being cut nearer to or farther from the ground as desired.

FEED TROUGH. — Francis O. Reed, Paris, Texas. This invention provides a stock feeder designed to permit of the feeding of a measured quantity of food from a point remote to cattle in the barn or stable, whereby the farmer or his family may feed the cattle from the dwelling, the invention covering a novel construction of food and hay apartments, with valves and tripping devices, in connection with one or more wire pulls leading to the house.

HOG PEN. — William McDaniel, Bearden, Ark. This is a portable pen, simple in construction and made of light timber, with doors to slide vertically in guideways formed by cleats, whereby the pen may be readily formed into a combined pen and trap, the doors falling by gravity when the hog enters the pen.

Miscellaneous.

COIN OPERATED MACHINE.—Frederic B. Cochran, Brooklyn, N. Y. This invention provides for the construction of a music-producing mechanism having a motor combined with a coin-controlled device operative from outside the machine casing, and adapted when actuated by the deposit of a coin to start the motor and produce music.

CASH INDICATOR AND RECORDER.—Lloyd M. Mills, Grand Rapids, Mich. This is a device in which a series of radially arranged type bars are mounted to slide, in connection with a tape to be printed on thereby and an indicator, to automatically and accurately stamp numerals corresponding to the keys on the tape directly over or below each other in due numerical order to form a column of figures, the sum of which can be readily totalized.

EYEGLASSES. — Herbert D. Martin, Philadelphia, Pa. This invention relates to the spring and nose clamps of eyeglasses, by which the lenses may be carried laterally in either direction or vertically, as desired, the invention being an improvement on a former patented invention of the same inventor.

EXERCISING MACHINE. — William E. Forest, New York City. This invention provides a machine with sheaves, cords, and weights, in which the resistance weights are guided by a strained endless cord running over the sheaves, the arrangement being such that the machine may be used for either a downward or an upward pull.

SEPARABLE BUTTON. — Charles E. Perry, Forsyth, Montana. This is a button which may be readily attached to clothing without sewing or injury thereto, and is designed to be of simple construction and capable of rapid production from sheet or cast metal.

EXERCISING MACHINE. — Daniel L. Dowd, New York City. This is a machine operated by ropes attached to rotatable pulleys, in which the desired resistance is furnished by springs attached to the pulleys, the amount of resistance being easily varied and regulated, and the machine being designed to develop all the muscles of body, arms, legs, and neck, and strengthen the chest and lungs.

REEL FASTENER FOR FISHING RODS. —John G. Landman, Brooklyn, N. Y. According to this invention the rod has a seat for retaining the reel-attaching plate, and also a spiral thread or groove, a nut on the rod being adapted to the thread or groove and to the reel plate, while a stop prevents disengagement of the nut from the spiral thread or groove next the reel plate or socket, the device being simple and inexpensive and making a quickly adjusted fastening.

BAG HOLDER AND TRUCK.—John H. Reckford, Belair, Md. In this device the bag is intended to rest between upright standards, through which pass ropes to the inner ends of which spreaders are loosely connected, to be inserted in the mouth of the bag to hold it open, the device being portable and adapted to carry bagged grain, the bag being quickly attached to and detached from the holder.

SPRING BED BOTTOM. — Joseph P. Leggett, Carthage, Mo. This is an improvement in bed bottoms in which coiled wire springs are supported upon and attached to crossed wires that form the base of the bed bottoms, stout or thick iron or inelastic wires, arranged parallel to the sides of the frame and attached to its end portions, being employed in connection therewith.

TABLE OR OTHER LEGGED ARTICLE. —William B. Pellett, Flint, Mich. This invention relates to articles having legs or posts to support them, and consists in a special knockdown construction of detachable legs, with a special construction of the corners or portions of the articles to which the legs are attached, including the means to secure the whole together.

HOLDER FOR COVERS. — Edward W. Stone, Chicago, Ill. According to this invention the vessel cover is made with a shank depending vertically from its lower side, the lower end of the shank being bent outward and upward to form a hook whereby the cover may be held horizontally on the rim of a shallow or deep vessel, and serve as a temporary shelf.

STOVE POLISH. — Stephen A. Kingsland, Middletown, Conn. This is a composition designed to be applied to a stove and left to dry and harden, without any rubbing or scrubbing whatever, and thus forming a fine enamel or polish, the composition being applicable to the stove at any time, whether the stove is cold or hot.

PAINT. — Jacob G. W. Martens, New York City. This is a paint principally intended for coating the bottoms of ships to prevent barnacles from fastening thereon, and also to prevent iron and other metals from rusting, while when applied to trees, wood and other substances, it is designed to preserve them from the elements and from insects.

NEW BOOKS AND PUBLICATIONS.

A SECRET INSTITUTION. By Clarissa Caldwell Lathrop. New York: Bryant Publishing Co. 1890. Pp. 339. Price 50 cents.

This novel treats of insane asylums somewhat in the vein of Wilkie Collins. The legal aspects of the case of lunatics receive consideration, and the whole is graphically put.

FLIRT. A story of Parisian life. By Paul Hervieu. Translated by Hugh Craig, with illustrations by Mme. Madeleine Lemaire. New York: Worthington Co. 1890. Pp. 273.

Business and Personal.

The charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

For Sale—New and second hand iron-working machinery. Prompt delivery. W. P. Davis, Rochester, N.Y.

Acme engine, 1 to 5 H. P. See adv. next issue.

Presses & Dies. Ferracute Mach. Co., Bridgeton, N. J

For steel castings of best quality, write the Buffalo Steel Foundry, Buffalo, N. Y.

Best Ice and Refrigerating Machines made by David Boyle, Chicago, Ill. 155 machines in satisfactory use.

The Improved Hydraulic Jacks, Punches, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.

Power presses and dies. Also contractors for special machinery. T. R. & W. J. Baxendale, Rochester, N. Y.

Tight and Slack Barrel Machinery a specialty. John Greenwood & Co., Rochester, N.Y. See illus. adv., p. 13.

Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York.

Safety Elevators, steam and belt power; quick and smooth. The D. Frisbie Co., 112 Liberty St., New York.

Veneer machines, with latest improvements. Farrel Fdry. and Mach. Co., Ansonia, Conn. Send for circular.

The Holly Manufacturing Co., of Lockport, N. Y., will send a book of official reports of duty trials of their high duty pumping engines on application.

Guild & Garrison, Brooklyn, N. Y., manufacture steam pumps, vacuum pumps, vacuum apparatus, air pumps, acid blowers, filter press pumps, etc.

The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, $4; Munn & Co., publishers, 361 Broadway, N. Y.

Manhattan packing is self-lubricating. It keeps the piston rods bright and smooth. Send for sample and price list to Greene, Tweed & Co., 83 Chambers St., N. Y.

Parties having inventions for sale, or wishing to have patented goods introduced or exhibited at the coming exposition, Boston, address Chas. Babson, Jr., 24 Congress St., Boston, Mass.

Gentleman about to open a manufacturers' agency wishes to correspond with manufacturers desirous of being represented in Canada. "Security given." Address "D. W. C.," 307 Sherbourne St., Toronto, Canada.

Saw Makers Wanted—50 or more practical hammersmen on circular and long saws and a few good filers and bitters can find steady employment by addressing, with name, residence and full particulars as to experience, etc., William L. Pierce, 89 Diamond St., Pittsburg, Pa.

☞Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

TO INVENTORS.

An experience of forty years, and the preparation of more than one hundred thousand applications for patents at home and abroad, enable us to understand the laws and practice on both continents, and to possess unequaled facilities for procuring patents everywhere. A synopsis of the patent laws of the United States and all foreign countries may be had on application, and person contemplating the securing of patents, either at home or abroad, are invited to write to this office for prices, which are low, in accordance with the times and our extensive facilities for conducting the business. Address MUNN & CO., office SCIENTIFIC AMERICAN, 361 Broadway, New York.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Granted

August 26, 1890,

AND EACH BEARING THAT DATE.

[See note at end of list about copies of these patents.]

Accident case, F. King ... 435,310
Acoustical instruments, combined mouth and nose piece for, H. C. Demming ... 435,055
Adjustable chair, J. P. Hindman ... 435,224
Advertising apparatus, automatic, R. Gornall ... 435,118
Advertising card holder, S. A. Bromberg ... 435,352
Advertising medium, scenic, J. House ... 435,064
Air compressor, automatic, J. W. Elcheimo ... 435,034
Ammonium nitrate, making, E. Carez ... 435,280
Animal shears, R. Monday ... 435,044
Argand burner, I. J. Atwood ... 435,130
Asphaltum, refining crude, R. Alexander ... 435,198
Atomizer for toilet fans, N. Wickliffe ... 435,197
Atomizers or other devices, air forcing and compressing apparatus for, F. J. Mitchell ... 435,043
Automatic lubricator, F. O. Blackwell ... 435,085
Axle box, F. C. Rojo ... 435,124
Bag. See Mail bag.
Bale fastener, J. M. Ford ... 435,218
Battery. See Galvanic battery.
Bed bottom, spring; B. E. Leckron ... 435,231
Bed pan, A. L. Freund ... 435,058
Bedstead slat lock, D. L. Hartsfield ... 435,178
Beer coolers, buck for, F. T. Cladek ... 435,282
Bench. See Work bench.
Bit. See Bridle bit. Calking bit.
Block. See Ceiling fuse block. Fuse block.
Boiler. See Steam boiler.
Boiler, J. Christiansen ... 435,353
Boiler appliance, C. D. Dodge ... 434,214
Bolts, nut locking washer for, S. H. B. Cochrane ... 435,345
Book, student's copy, H. C. Spencer ... 435,051
Boot or shoe heel, C. A. Erdman ... 435,136
Boot or shoe nailing machine, J. N. Severance ... 434,998
Bottle stopper, A. Cohenius ... 435,207
Box. See Axle box. Dust box. Locomotive sand box. Mail box. Show box. Signal box. Watch movement box.
Brake. See Car brake. Railway brake.
Brick pressing machine, Davis & Lower ... 435,171
Bridge approaches, gate for swinging, G. B. Howland ... 434,932
Bridges, automatic gate for swing, H. Strom ... 435,106
Bridle blind, C. M. C. Fleming ... 435,115
Bridle bit, C. A. Reade ... 435,189
Bridle bit, O. M. Sloat ... 435,252
Broom, J. M. Hendershot ... 435,304
Brush making machine, M. R. Bissell ... 435,268
Bucket, minnow, T. M. Darrah ... 435,211
Building, portable, T. R. Carskadon ... 435,112
Bunion protector, C. B. Dadisman ... 434,979
Burner. See Argand burner. Gas burner.
Butter, shipping package for, W. H. Cadwell ... 435,204
Cable grip, Brumwell & Doolittle ... 435,275
Calking bit, W. E. Park ... 435,077
Camera. See Photographic camera.
Camera, W. R. Tobias ... 435,080
Can for syrup, etc., Mason & Bergman ... 435,234
Cans, machine for making the seams of sheet metal, C. F. Beaman ... 434,908
Candy, manufacturing, I. S. Barnett (r) ... 11,107
Cane car, sugar, A. Quasebarth ... 435,319
Car brake, M. B. Leonard ... 435,019
Car brake, H. H. Westinghouse ... 435,373
Car coupling, J. O. Collins ... 434,978
Car coupling, Corban & Green ... 435,287
Car coupling, C. B. Cowen ... 435,209
Car coupling, Hart & Stanton ... 434,986
Car coupling, E. Kaylor ... 435,360
Car coupling, D. J. Marx ... 435,072
Car coupling, D. Schofield ... 435,192
Car coupling, J. W. Vaughn ... 435,051
Car coupling, W. J. Walker ... 435,196
Car door, T. Kubank ... 434,923
Car door, J. D. Harless ... 435,176
Car motor, compressed air street, F. M. Merrill ... 435,020
Car motor, street, W. H. Patton ... 434,993
Car mover, G. W. M. Simms ... 435,326
Car, stock, A. C. Paul ... 435,379
Car, street, W. Robinson ... 435,123
Car trolley electro motor, S. D. Cairns ... 435,011
Cars, combined heater and spark conveyer for railway, W. Amos ... 435,199
Cars, pipe coupling for railway, E. E. Gold ... 435,016
Cars, trolley or contact sup. for elec., L. Atwood ... 435,166
Cardboard cutting machine, R. T. Smith ... 434,958
Carpenter's roll gauge, S. G. Arnold ... 435,027
Case. See Accident case. Clock case. Postal examination case. Surgeon's case. Watch shipping case.
Cash recorder for store service, R. H. North ... 435,241
Cash register, J. Brady ... 435,052
Cash register, W. G. Latimer ... 435,067
Cash register and indicator, A. B. Hayden ... 435,038, 435,303
Casting apparatus, sash weight, W. P. Cahill ... 435,205
Casting retort pipes, etc., appa. for, J. I. Kinsey ... 435,041
Ceiling fuse block, H. A. Fitch ... 434,925
Chain link, wire, F. W. Smith, Jr ... 435,327
Chair. See Adjustable chair. Electro-magneto therapeutic chair. Photographic posing chair. Railway chair.
Churn, W. H. Day ... 435,113
Churn dasher, Sheets & Goforth ... 435,369
Chutes of coal or ore bins, counterbalance for the discharge, E. S. Eaton ... 435,356
Cigarmaker's gauge, Messima & Burgos ... 435,073
Clamp. See Rubber dam clamp. Wringer clamp.
Clasp, E. K. Kelly ... 435,099
Clock case, S. Greeny ... 435,060
Clock, electrical watchman's, H. S. Park ... 435,155
Clocks, electric alarm for, W. H. Deane ... 435,213
Clothes drier, W. Curtis ... 434,921
Clothes pin, E. M. Turner ... 435,195
Clothes suspending device, H. Gerbo ... 435,117
Clutch, frictional grip, H. H. Kendrick ... 434,934
Coal conveyer belts, means for securing push plates for, C. S. Schenck ... 435,025
Cock, gauge, R. J. Colvin ... 435,286
Coffee pot or boiler, J. K. Hawkins ... 435,302
Coin holder, E. M. Goldsmith ... 435,220
Collar fastener, horse, T. N. Mathias ... 435,149
Collar pad, harness, L. H. Kindy ... 435,229
Compound press, F. B. Deane ... 435,212
Conductors, automatic disconnector for overhead, A. L. Johnston ... 435,098
Conductors, structure for supporting and insulating suspended bare, C. J. Van Depoele ... 435,262
Copying press, J. W. Jones ... 435,309
Cotton press, Ingram & Kellogg ... 435,119
Counter seat, H. Hill ... 435,307
Coupling. See Car coupling. Shaft coupling. Thill coupling.
Crane, hydraulic, Hemphill & Fawell ... 435,179
Crane, traveling, W. Wood ... 435,164
Creamer, cabinet, N. G. Williams ... 435,005
Cremator, domestic, A. Manser ... 435,184
Cross head jack, S. A. Teal ... 435,194
Cuff holder, L. A. Negraval ... 434,944
Cultivator, G. M. Bowman ... 435,202
Cultivator, lister, B. F. Erway ... 435,291
Current regulator, automatic, R. Thury ... 435,332
Curtain fixture, G. W. Haskins ... 435,061
Curtain fixture, H. D. Knight ... 435,018
Curtain pole fixture, R. T. Brewer ... 435,053
Cut-out, W. F. Smith ... 435,048
Cutting or trimming device, C. H. Scofield ... 434,956
Damper, S. G. Searight ... 435,125
Dash pot, M. Raughtigan ... 434,951
Dead centering, means for preventing, R. Watt ... 435,267
Dental engine hand piece, C. M. Richmond ... 434,952
Dental engines, angle attachment for, Fleury & Goodman ... 435,138
Desk and seat, school, E. E. Hicks ... 435,305
Dish drainer, S. Mansfield ... 435,148
Ditching machine, A. E. Buchanan ... 435,276
Door check, E. W. Imler ... 435,226
Door frame, F. R. H. Lohse ... 435,313
Door hanging gauge, C. Le Francois ... 435,089
Door opener, C. H. Woodcock ... 435,109
Drier. See Clothes drier.
Drill. See Rock drill.
Dropper. See Harvester dropper.
Drying kiln, S. W. Peregrine ... 435,258
Duplex tube, E. J. Steele ... 435,193
Dust box or pan, M. W. Schumacher ... 435,251
Dust collector, J. S. Ash ... 435,165
Dust collector, H. Farrar ... 435,057
Dynamos, contact brush for, E. Franklin ... 435,296
Earring, E. Ciner ... 435,354
Eaves trough hanger, T. C. Belding ... 435,169
Electric arc light circuits, reg. of, D. Higham (r) ... 11,108
Electric circuits, system for, F. Stitzel ... 435,105
Electric connector, E. L. Orcutt ... 434,943
Electric cut-out, C. Heisler ... 435,223
Electric energy, means for dis., S. Z. De Ferranti ... 435,114
Electric light globes, guard for, R. M. Gardiner ... 435,116
Electric lighting system, A. H. Bauer ... 435,084
Electric machine, dynamo, W. F. Collins ... 435,015
Electric switch, J. W. Battershall ... 435,132
Electric switch, C. H. Herrick ... 435,093
Electric switch, J. A. Norton ... 435,152
Electric train signal and controlling device automatic, W. H. Wilson ... 435,340
Electro-magneto therapeutic chair, F. H. Brown ... 435,376
Electrolier, extension, J. T. Robb ... 435,368
Electrotype plates, method of and means for bending, P. M. Furlong ... 435,036
Elevator indicator, J. Lynn ... 435,232
Engine. See Rotary engine.
Engine, P. Chouteau ... 434,976
Engine circuits, gen. for elec., C. J. Van Depoele ... 435,261
Engraving apparatus, Ourdan & Kolb ... 435,243
Engraving machine, V. L. Ourdan ... 435,244, 435,246
Engraving machine, Ourdan & Kolb ... 435,245
Evaporating apparatus, T. Gaunt ... 435,090
Exercising machine, universal, F. W. Howe ... 435,180
Eyeglass holder, C. D. Waite ... 434,964
Fabric. See Woven fabric.
Fabrics, machine for folding and pressing the edges of, J. F. Fellows ... 435,137
Feather renovator, J. H. Bruen ... 435,170
Feeding and justifying mech., J. A. Watson ... 435,338
Fence, L. F. Finley ... 435,294
Fence, L. Freas ... 435,297
Fence machine, wire, A. Land ... 435,042
Fencing, Ward & Warren ... 434,965
Ferrule for canes, umbrellas, etc., S. W. Evans, Jr ... 435,215 to 435,217
Fertilizer distributer, R. Galloway ... 435,037
Fertilizers, preparing, C. Clifford ... 434,977
File band and confining clasp therefor, Hall & Norton ... 434,926
Fire escape, H. Vieregg ... 435,266
Fire escape device for live stock, L. K. Bartley ... 435,028
Fire extinguishing apparatus, E. R. & J. R. Moore ... 435,316
Flask. See Moulding flask.
Floor jack, H. E. Britton ... 435,031
Floor structure, tubular, F. Schmemann ... 435,155
Flush tank, automatic, E. O. Hunt ... 435,039
Fly book leaf, P. C. Hewitt ... 435,094
Forging machine, electric, G. D. Burton ... 435,110
Forging machines, electric bar heating and feeding apparatus for, G. D. Burton ... 435,111
Fork. See Hay fork.
Frame. See Door frame. Mosquito bar frame. Picture frame.
Fruit clipper, J. T. McMullen ... 435,240
Fruit gatherer, J. W. Cain ... 435,206
Fuel, artificial, A. Pagenstecher ... 435,076
Funnel, H. W. Hoops, Jr ... 435,096
Furnace. See Glass melting furnace.
Fuse block, N. S. Possons ... 435,102
Gauge. See Carpenter's roll gauge. Cigarmaker's gauge. Door hanging gauge.
Gauge, C. O. Lambert ... 435,311
Gauge, J. L. Murphy ... 435,348
Galvanic battery, C. J. Hubbell ... 435,346
Game, W. J. Irwin ... 435,065
Game, A. Van Brakle ... 435,260
Game apparatus, R. Hill, Jr ... 434,987
Game apparatus, W. McClure ... 435,237
Garments, device for fit, and draught, M. E. Hall ... 435,301
Gas, appa. for the man. of illum., P. W. Mackenzie ... 435,070
Gas burner, natural, O. F. Grant ... 435,299
Gas, manf. illuminating, P. W. Mackenzie ... 435,071
Gas mixer, natural, A. A. Phillips ... 434,948
Gas holders, means for regulating the movement of, E. L. Pease ... 435,186, 435,187
Gas washer, W. Morava ... 434,941
Gate. See Hydraulic gate.
Gate, T. A. Kearns ... 435,347
Gate, S. Stewart ... 435,382
Gate, J. Thompson ... 435,127
Gate, J. Wilmoth ... 435,339
Generator. See Steam generator. Steam and hot water generator.
Glass melting furnace, L. Houze ... 434,981
Governor, steam engine, Babbitt & Randolph ... 435,083
Grain packer and carrier, W. H. Knapp ... 435,143
Grain separator, H. A. Barnard ... 435,167

© 1890 SCIENTIFIC AMERICAN, INC.

Grass receptacle, C. H. Latham... 435,183
Grater, nutmeg, C. M. Maxson... 435,235
Grip device, intermittent, W. E. Canedy... 435,279
Guard or shield for proj. surfaces, R. L. Stickney. 435,371
Gun, breech-loading, C. E. Sneider... 435,329
Gun, breech-loading, J. Tonks... 435,384
Hame fastener, L. Wildhagen... 434,967
Hammer, reciprocating elec., C. J. Van Depoele... 435,264
Hand motor, N. T. Tarbox... 435,001
Hanger. See Eaves trough hanger. Hat hanger. Lamp hanger.
Harmonica, R. W. Weissenborn... 435,163
Harness, G. H. Gildersleeve... 435,059
Harrow, O. Tower... 434,962
Harvester dropper, A. H. Ravenstein... 435,320
Harvester, potato, A. T. Dowden... 434,980
Harvester reel, corn, McCollister & Rennard... 435,238
Hat bodies, device for blocking, G. F. Larkin... 435,145
Hat hanger, G. H. Lumbey... 435,112
Hay fork, M. W. Dickey... 435,289
Heater. See Water heater.
Heating apparatus, C. E. Mark... 434,936
Hides into strips, appa. for cut., H. T. Rohrmoser 435,381
High resistance shunt compound, W. G. Bremer. 435,030
Hoisting machine, E. McLane... 435,239
Holder. See Advertising card holder. Coin holder. Cuff holder. Eyeglass holder. Knitting machine web holder.
Hook. See Lap hook. Snap hook.
Horn, portable fog, J. Millbourn... 435,363
Horseshoe, W. Somerville, Sr... 435,104
Hot air reg., water evap. attach. for, A. F. Hilyer 435,095
Hydraulic gate, reciprocating, J. P. Frizell... 435,298
Hydrocarbon burning appa., J. H. Bullard. 435,269, 435,270
Ice cream freezer, J. G. Moomy... 434,940
Ice cream freezer, W. H. Tomson... 435,333
Ice machine, W. D. Alford *et al.*... 434,904
Ice shaving machine, S. T. Jull... 435,359
Indicator. See Elevator indicator.
Inkstand, W. W. Campbell... 435,277, 435,278
Inkstand, F. V. Fletcher... 435,035
Insulator, C. O. Muehlberg... 434,992
Insulator for overhead electric conductors, section, E. Thomson... 434,961
Iron. See Soldering iron.
Jack. See Cross head jack. Floor jack.
Jars, etc., cleaner for fruit, S. W. Erwin... 434,982
Jewelers' use, tool for, E. N. Parker... 434,946
Jewelry, W. Leidig... 435,068
Jet apparatus, automatic, L. Schutte... 434,997
Journal bearing, anti-friction, R. W. Moffett... 435,074
Journal lubricating device, J. B. Glover, Jr... 434,983
Journals and boxes, means for cooling, A. J. Robertson... 434,995
Kiln. See Drying kiln. Pottery kiln.
Knitting machine, circular, H. S. Long... 435,378
Knitting machine, straight, D. Hurley... 435,181
Knitting machine web holder, G. H. Gilbert... 435,174
Knobs, washer con. for door, H. F. Sampson... 435,250
Lace machine, twist, H. Redgate... 435,321
Lacing stud and making the same, shoe, W. H. Smidt... 434,959
Lamp, L. Henkle... 435,377
Lamp, car, J. Kirby, Jr... 435,361
Lamp cut-out, electric, W. G. Bremer... 435,029
Lamp cut-out, electric, W. F. Smith... 435,049
Lamp, electric arc, E. Rothlisberger... 435,248
Lamp hanger, incandescent, P. J. Chassagne... 434,917
Lamp, miner's, P. J. Miller... 435,120
Lamp socket and key, incandescent, W. F. Smith. 435,047
Lamp socket, incandescent, F. C. Rockwell... 435,024
Lamp wick raiser, W. M. Hoerle... 435,357
Lantern, A. H. Crawford... 435,134
Lanterns, signal atttachment for, G. C. Westervelt 435,082
Lap hook, L. A. McDonald... 435,151
Lathe, W. Houghtaling... 434,930
Lawn sweeper, F. La Batt... 435,144
Lifter. See Transom lifter.
Lighting and wick raising attach., C. D. Rundell.. 435,190
Liquors, apparatus for cooling and aerating wort for malt, C. D. Stanford... 435,000
Lock. See Bedstead slat lock. Nut lock.
Lock, K. J. F. Lundquist... 434,989
Locomotive boilers, water pur. for, J. B. Barnes.. 435,168
Locomotive sand box, Thompson & Kind... 435,372
Locomotive sand pipe, M. Daly... 435,210
Looms, tug strap and holder for, D. S. Knight... 434,988
Lubricator. See Automatic lubricator.
Magnet, actuated electro, F. H. Brown... 435,343
Mail bag, W. Leifer... 435,362
Mail box, H. Hill... 435,306
Manganese and iron for brake shoes, composition of, W. W. Snow... 435,350
Mantel, sheet, K. A. Graves... 435,067
Matrix making machine, F. M. F. Cazin... 435,344
Measure, scale, I. Birge... 434,911
Measure, speed, A. B. Calkins... 435,012, 435,013
Measure, tailor's, M. E. Kellogg... 435,182
Measuring machine, distance, J. S. Blankman... 435,201
Medicine, ague remedy, J. W. Noland... 435,046
Metal sheet, compound, R. Chappell... 435,014
Metal swaging machine, J. Berry... 435,351
Metals by electricity, heating, C. L. Coffin... 435,284
Miter cutting machine, W. R. Fox... 435,219
Mixing picker, A. S. Lyon... 435,147
Moulding flask, J. I. Kinsey... 435,040
Moulding machine, F. H. Van Houten... 435,336
Mop wringer, T. J. Foley... 435,088
Mosquito bar frame, automatic, J. Sarrazin... 435,191
Motor. See Car motor. Hand motor. Sewing machine motor.
Muzzle, G. W. Johnson... 435,308
Nail machine, wire, A. J. Sweeney... 435,256
Nut for axles, lock, J. Swan... 435,079
Nut lock, D. K. Jackman... 434,933
Nut lock, C. H. Thomas... 435,126
Oil distributing apparatus, E. Williams... 434,968
Oils, apparatus for burning hydrocarbon, Bullard & Nickerson... 435,009
Orange grader, A. Ayer... 435,200
Ordnance, firing valve for pneumatic, N. W. Pratt... 435,367
Ornamental articles, producing, J. Baynes... 434,907
Oven grate, J. H. Allyn... 434,970
Packing, metallic steam, D. Hanney... 435,141
Pad. See Collar pad.
Pan. See Bed pan.
Pantograph, Ourdan & Kolb... 435,242
Paper bag machine, E. Metzenaur... 434,939
Paper feeding apparatus, E. M. Low... 435,100
Pawl and ratchet device, A. B. Case... 435,087
Pea grader, N. G. Numsen... 435,153
Perforating machine, White & Kittredge... 435,003
Photographic appa., lens tube for, W. H. Trueman 435,335
Photographic camera, J. E. Blackmore... 435,342
Photographic objective, Abbe & Rudolph... 435,271
Photographic posing chair, J. M. Dow... 435,056
Picker. See Mixing picker.
Picture frame, W. C. Tidball... 435,161
Piers or other structures, found. for, R. L. Harris 435,142
Pin. See Clothes pin.
Pipe. See Locomotive sand pipe. Sheet metal pipe.
Planter, cotton, Harris & Smith... 434,985
Planter, cotton, L. Moseley... 435,317
Plashing device, C. E. Hagarty... 435,300
Plow, G. W. Doolittle... 435,172
Plow, Messer & Garner... 434,938
Plow, R. Muesse... 435,045
Poke, F. B. Greer... 435,175
Pole, carriage, L. Miller... 435,364
Post driving machine, W. B. Grigsby... 435,222
Postal examination case, J. Straughan... 435,254
Pot. See Coffee pot. Dash pot.
Pottery kiln, F. C. Roberts... 434,953, 434,954
Power transmitting mechanism, E. Chaffey... 434,916
Press. See Compound press. Copying press. Cotton press.
Printing presses, auto. ink dis. for, W. B. Sheffield 434,957
Printing presses, web cut. mech. for, J. L. Cox... 435,355
Printing presses, impression throw-off for, C. J. Schiller... 434,955
Propeller, screw, J. Spanoghe... 435,330
Protector. See Bunion protector.
Pulley, W. Stoddard... 435,160
Pulp strainer, Goodall & Webster... 435,091
Pump, air, C. Birkery... 435,008
Pump, air, G. R. Case... 435,010
Punch, check, J. A. House... 435,063
Quoin, R. Atwater... 434,906
Rack. See Towel rack.
Rack for holding and exhibiting rolls of goods, Chapman & Montgomery... 435,281
Radiator hood, heat, G. E. Dixon... 435,290
Railway, H. L. Stillman... 435,253
Railway brake, A. F. Baatz... 434,971
Railway chair and cross tie, com., M. M. Green... 435,221
Railway conduit with tubular conductor, electric, C. J. Van Depoele... 435,263
Railway cross tie, R. Whiteford... 435,004
Railway cross tie and rail fastening, D. Vanaman. 435,162
Railway rails, splice bar, J. A. Martin... 435,233
Railway ties, wear plate for, J. Churchward... 434,918
Railways, electril device for preventing accidents on, G. Thew... 435,259
Railways, electric signal for cable, S. J. Jacobs... 435,097
Range, E. W. Anthony... 435,006
Range finder, S. Pratt... 434,950
Recorder. See Cash recorder.
Recording machine, H. G. O'Neill... 435,318
Reel. See Harvester reel.
Refrigerator, N. A. Laman... 435,230
Register. See Cash register.
Regulator. See Current regulator.
Ring. See Ear ring.
Rock drill, J. Frolich... 435,139
Roller, cultivator, and seeder, combined, J. Rush. 435,249
Roof for brick yards, etc., mov., F. B. Livingston. 435,146
Roofs, arch pipe truss for, F. Schmemann... 435,156
Roofing, waterproof and fireproof material for, A. Blank (r)... 11,106
Rotary engine, C. D. Farmer... 435,293
Rubber dam clamp, J. W. Ivory... 435,228
Sash and belt, combined, W. S. Teel... 435,257
Sash fastener, J. H. Beauregard... 434,909
Saw, gang rotary, H. S. Perkins... 435,380
Saw sharpening machine, O. Pierson... 435,121
Scraper, road, H. O'Hare... 435,365
Screw cutting machine, H. C. Brill... 434,913
Seat. See Counter seat.
Seeder and fertilizer dis., com., G. D. Burdine... 435,062
Separator. See Grain separator.
Sewing machine, A. H. Sawtell... 434,996
Sewing mach. embroidering attach., J. A. House.. 435,062
Sewing machine motor, G. R. Smith *et al.*... 435,328
Shaft coupling, H. Schneider... 435,325
Shawl strap, H. Von Mann-Tiechler... 435,101
Shears. See Animal shears.
Sheet metal pipe, Hart & Crane... 434,927
Shelf attachment, H. D. Forbes... 435,173
Shipping package, W. H. Cadwell... 435,203
Shirt bosom, S. Deutsch... 435,288
Shoes, manufacture of, F. J. Blum... 434,975
Show box, H. A. Robinson... 435,022, 435,023
Signal. See Electric train signal.
Signal box, non-interfering, W. E. Decrow... 434,922
Slate washer, W. F. MacLachlan... 435,069
Sled, bob, J. Yenne... 435,341
Snap hook, J. A. Park... 435,247
Snow road machine, Turnbull & Farwell... 434,963
Soda alum, crystallizing, E. Auge... 435,129
Sodawater draught apparatus, A. D. Puffer... 435,188
Soldering iron, F. Barr... 435,274
Spark arrester, A. M. Harris... 435,177
Spinning machines, yarn separator for, J. E. Prest 435,122
Spinning spindle, etc., bearing for, C. H. Fisher... 434,924
Spinning spindle support, G. O. Draper... 434,981
Spring. See Vehicle spring.
Square, C. L. Bronk... 435,086
Stamp canceling machine, H. J. Latshaw, Jr... 434,935
Stamp, hand printing, R. H. Smith... 435,159
Stand. See Wash stand.
Steam and hot water generator, W. C. Higgins... 434,928
Steam boiler, J. Baird... 434,973
Steam generator or evaporator, G. W. Baird... 434,972
Stopper. See Bottle stopper.
Stove attachment, gasoline, R. Andlauer... 435,275
Strainer for fluid pipes, G. P. Gates... 435,110
Strainer for tea or coffee pot, Bean & Watson... 435,007
Strap. See Shawl strap.
Street sweeper, A. B. Smith... 435,103
Surgeon's case, C. H. Truax... 435,108
Switch. See Electric switch.
Table leaf, T. M. Wassenius... 435,337
Tank. See Flush tank.
Teaching music, device for use in, A. O. Baldwin. 435,131
Telegraph, autographic, H. Etheridge... 435,292
Telephone connection, automatic, W. H. Ford... 435,295
Telephone tablet, W. S. Mendenhall... 435,314
Thill coupling, G. W. Atkins... 435,273
Thill coupling, T. A. Watrous... 434,966
Tie. See Railway cross tie.
Tinsmith's machine, E. E. Stow... 434,960
Tire tightener, J. N. Parker... 434,947
Tobacco leaves, machine for stripping and booking, J. Delamar... 435,135
Tobacco moistener, F. X. Strauss... 435,255
Toothpick, H. C. F. Oehlecker... 435,350
Towel rack, J. W. Campbell... 435,133
Transom lifter, H. A. Bennett... 434,910
Tripod, J. R. Moeller... 435,315
Trolling spoon, H. E. Skinner... 435,026
Trousers, M. Hamburger... 434,984
Tube. See Duplex tube.
Tube machine, J. M. Riley... 435,078
Tubing, machine for making wire, Crowfoot & Doolittle... 434,920
Tug, hame, J. B. Marshall... 434,937
Turn buckles, die for making, S. A. Clark... 435,033
Type setting machine, J. B. Odell... 434,942
Typewriting machine, Conkle & McCulloch... 434,919
Typewriting machine, M. G. Merritt... 434,991
Typewriting machine, C. M. North... 435,349
Valve, float, J. Krehbiel... 435,066
Valve gear, Richardson & Rowland... 435,323
Valve, piston, F. H. Richards... 435,322
Vaporizer and burner for oil and water, retort, M. D. Miller... 435,236
Vehicle, Parry & Reel... 436,366
Vehicle, Parsons & Willcox... 435,154
Vehicle gearing, elect. propelled, N. S. Possons.. 434,949
Vehicle running gear, H. W. Cooper... 435,208
Vehicle spring, W. J. Rawlings... 434,994
Vehicle, two-wheeled, F. Weyandt, Jr... 435,374
Vehicle wheel, A. C. Smith... 434,999
Velocipedes, locking device for, Singer & Lea... 435,157
Vending machine, coin-operated, J. C. Stevens... 435,370
Veneer cutting machine, Smith & Fredericks... 435,158
Vessel, navigable, M. Von Szabel... 435,107
Vessels, device for raising sunken, C. H. Brown... 435,054
Voting apparatus, P. Hoffman... 435,225
Vulcanizer, C. A. Davis (r)... 11,105
Wagon body, D. H. Allen... 434,905
Warp machine, traverse, J. Upsdale... 435,002
Wash stand, S. S. Burr... 434,914, 434,915
Washer. See Gas washer. Slate washer.
Washing machine, R. L. Gore... 434,092
Watch movement box, W. J. Savage... 435,324
Watch shipping case, A. J. Niles... 434,945
Water closet valve and operating mechanism therefor, T. McHugh... 435,021
Water heater, J. F. McElroy... 435,075
Water slide, J. Inglis... 435,227
Welding by electricity, method of and apparatus for, C. L. Coffin... 435,283
Wells, device for raising water from, A. C. Witt.. 434,969
Wheel. See Vehicle wheel.
Wheel, W. E. Bartlett... 434,974
Wheel, A. O. Hubbard... 435,358
Wheels, method of and means for manufacturing metal, E. P. Lynch... 434,990
Wick adjusting device, W. C. Homan... 434,929
Windlass operative mechanism, R. W. Wonson... 435,128
Wire straightener, O. Collins... 435,285
Woodworking machine, F. H. Van Houten... 435,265
Work bench, J. H. Stewart... 435,331
Woven fabric, Meyenberg & Simon... 435,150
Wrench, H. Bornstein... 434,912
Wringer. See Mop wringer.
Wringer clamp, H. J. White... 435,375

DESIGNS.

Belt clasp, F. J. Herrick... 20,110
Brush or mirror back, F. V. Jones... 20,112
Cutlery handle tip, C. F. Smith... 20,116
Dish, E. M. Pearson... 20,118
Game board, F. H. Argersinger... 20,117
Handle for spoons, etc., W. Wilkinson... 20,119
Handle for spoons and forks, A. G. Rogers... 20,113
Indicator, Dieterich & O'Meara... 20,121
Knitted fabric, R. M. Hampton... 20,111
Lamp chimney cap, F. C. Zanetti... 20,114
Mat, C. Carr... 20,106 to 20,108
Shoe, E. L. Goding... 20,109
Stove, cooking, Bascom & Ritchie... 20,105
Stove, cooking, J. D. Foster... 20,115
Type, font of printing, L. B. Benton... 20,120
Wagon, laundry, H. C. Kromer... 20,122

TRADE MARKS.

Astringents, expectorants, vermifuges, liniments, and hair restoratives, Van Vleet & Co... 18,347
Beer, lager, Bartholomay Brewery Company... 18,350
Bitters, H. Kantorowicz... 18,344
Blood purifier and tonic remedy for internal and external use, N. E. Hickey... 18,353
Boilers, preparation for the prevention and removal of scale in steam, R. H. Cooper... 18,341
Brandy, A. Heller & Bro... 18,352
Cement, Portland, Mannheimer Portland Cement Fabrik... 18,360
Cement, Portland or hydraulic, H. O. Berg... 18,359
Cigarettes, cigarros, cheroots, and cigars, Consolidated Cigarette Company... 18,357
Clothing for men, boys, and children, outer, Strouse & Bros... 18,363
Corsets, Nusbaum & Co... 18,365
Dental rubber, E. J. McCormick... 18,339
Fleece, plush, stockinet, eider down cloth, and flannels, H. H. Bell's Sons... 18,336
Fruit flavors, McCormick & Co... 18,356
Insulated electrical wire, Benedict & Burnham Manufacturing Company... 18,340
Lamp chimneys, McKee & Brothers... 18,345
Lawns, cottons, and woolen goods, Creighton & Burch... 18,337
Liniment, Olney & McDaid... 18,361
Liniments for exter. and inter. use, G. W. Allaman 18,332
Locks, Miller Lock Company... 18,355
Remedy for burns, scalds, and similar ailments, and for external use, G. C. Mir... 18,346
Remedy for catarrh and kidney and liver diseases, G. Doehrer... 18,358
Silks, raw, Bavier & Co... 18,333 to 18,335
Starch, laundry, G. S. Graves... 18,343
Suits, extra pantaloons, overcoats, and caps, boys', A. Levy & Bro... 18,338
Toilet powder, Lazell, Dalley & Co... 18,354
Tonics, chill, Paris Medicine Company... 18,362
Velocipedes, Banker & Campbell Company... 18,348, 18,349
Watch cases, Essex Watch Case Company... 18,366
Wine, port, Feuerheerd, May & Co... 18,342, 18,351
Wire and articles of personal wear made therefrom, seamless plated filled, Burdon Seamless Filled Wire Company... 18,364

A Printed copy of the specification and drawing of any patent in the foregoing list will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian Patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of $40 each. If complicated, the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

USE ADAMANT WALL PLASTER

It is **Hard, Dense, and Adhesive.** Does not *check or crack.* It is impervious to wind, water, and disease germs. It dries in a few hours. It can be applied in any kind of weather. It is in general use. Licenses granted for the mixing, using, and selling.

Address ADAMANT MFG. CO. 309 E. Genesee St., Syracuse, N. Y.

ALUMINUM.—DESCRIPTION OF THE method of manufacturing this metal from cryolite as practiced at the Alliance Aluminum Works at Wallsend. With 3 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **731.** Price 10 cents. To be had at this office and from all newsdealers.

"Star" Foot Lathe Swings 9x25 in. Screw Cutting Automatic Cross Feed, etc.

LATHE

Scroll Saws, Circular Saws, Lathes Mortisers. Catalogue Free of all our Machinery.

Seneca Falls Mfg. Co., 695 Water St., Seneca Falls, N. Y.

SEBASTIAN, MAY & CO'S
Improved Screw Cutting
Foot & Power **LATHES**

Drill Presses, Chucks, Drills, Dogs, and machinists' and amateurs' outfits. *Lathes on trial.* Catalogues mailed on application. 165 W. 2d St., Cincinnati, O.

BASE BALL.—A DESCRIPTION OF the great national game of the United States, by an English writer, Jno. Newton Crane, with diagram of the field and 7 illustrations of players. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **693.** Price 10 cents. To be had at this office and from all newsdealers.

ROCK DRILLS
AIR COMPRESSORS,
MINING AND QUARRYING MACHINERY,
Ingersoll-Sergeant Rock Drill Co.
No. 10 PARK PLACE, NEW YORK.
Send for Complete Priced Catalogue.

TO BUSINESS MEN

The value of the SCIENTIFIC AMERICAN as an advertising medium cannot be overestimated. Its circulation is many times greater than that of any similar journal now published. It goes into all the States and Territories, and is read in all the principal libraries and reading rooms of the world. A business man wants something more than to see his advertisement in a printed newspaper. He wants circulation. This he has when he advertises in the SCIENTIFIC AMERICAN. And do not let the advertising agent influence you to substitute some other paper for the SCIENTIFIC AMERICAN, when selecting a list of publications in which you decide it is for your interest to advertise. This is frequently done, for the reason that the agent gets a larger commission from the papers having a small circulation than is allowed on the SCIENTIFIC AMERICAN.

For rates see top of first column of this page, or address **MUNN & CO., Publishers, 361 Broadway, New York.**

$3 PRINTING PRESS. Do all your own printing. Save money. Catalogue for two stamps. **Kelsey & Co.,** Meriden, Conn.

DRY AIR REFRIGERATING MACHINE. Description of Hall's improved horizontal dry air refrigerator, designed to deliver about 10,000 cubic feet of cold air per hour, when running at a speed of 100 revolutions per minute, and capable of reducing the temperature of 90° above to 50° below zero. With five figures, showing plan and side elevation of the apparatus, and diagrams illustrative of its performance. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **288.** Price 10 cents. To be had at this office and from all newsdealers.

ROP HAMMERS
Punching Presses
DIES AND OTHER TOOLS
For the manufacture of all kinds of SHEET METAL GOODS, DROP FORGINGS, &c.
Stiles & Parker Press Co.
Middletown, Conn.

Branch Office and Factory, 203 205 & 207 Center St., N. Y.

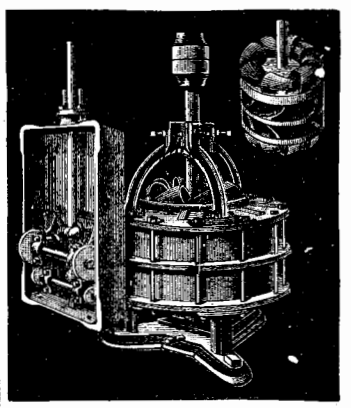

LITTLE GIANT WATER WHEEL
Cheapest and best wheel in the market.
Send for catalogue and price list.
MUNSON BROS., UTICA, N. Y., U. S. A.

ELECTRO MOTOR, SIMPLE, HOW TO make. By G. M. Hopkins.—Description of a small electro motor devised and constructed with a view to assisting amateurs to make a motor which might be driven with advantage by a current derived from a battery, and which would have sufficient power to operate a foot lathe or any machine requiring not over one man power. With 11 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **641.** Price 10 cents. To be had at this office and from all newsdealers.

CROSBY
POP SAFETY VALVE
WATER RELIEF VALVE
IMPROVED STEAM GAGE
STEAM ENGINE INDICATOR
Single Bell Chime Whistle, and all instruments used in connection with Steam, Air and Water.
Sole Agents for Clark's Linen Fire Hose.
NEW YORK. LONDON.
CROSBY STEAM GAGE & VALVE CO. 93 Oliver St. Boston, Mass.

LIGHTNING WELL-SINKING
MACHINERY MANUFACTURERS.

Hyrdaulic, Jetting, Revolving, Artesian, Diamond Prospecting Tools, Engines, Boilers, Wind Mills, Pumps. **Encyclopedia,** 1,000 engravings, Earth's Strata, Determination quality water; mailed, 25c.
The American Well Works, Aurora, Ill.
11 & 13 S. Canal St., Chicago, Ill.
1113 Elm St., Dallas, Texas.

OIL WELL SUPPLY CO. Ltd.
91 & 92 WATER STREET,
Pittsburgh, Pa.,
Manufacturers of everything needed for **ARTESIAN WELLS**
for either Gas, Oil, Water, or Mineral Tests, Boilers, Engines, Pipe, Cordage, Drilling Tools, etc. Illustrated catalogue, price lists and discount sheets on request.

OBESITY.—BY WALTER MENDELson, M.D. A very interesting paper, exhaustively treating of the causes of obesity and the proper method of combating it. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **744.** Price 10 cents. To be had at this office and from all newsdealers.

ARTESIAN
Wells, Oil and Gas Wells, drilled by contract to any depth, from 50 to 3000 feet. We also manufacture and furnish everything required to drill and complete same. Portable Horse Power and Mounted Steam Drilling Machines for 100 to 600 ft. Send 6 cents for illustrated catalogue. **Pierce Artesian and Oil Well Supply Co.,** 80 Beaver Street, New York.

INVENTIONS WORKED OUT, Drawings and Models made. Perfect safety to inventors assured. All kinds first-class lathe, planer, and bench work. Particular attention to special machinery, tools, dies, and press work. Safety Construction Co., 143 & 145 Elm St., N.Y



STEVENS PATENT
RELIABLE DIVIDER. No. 61
With Thumb Attachments.
Forged from heavy stock, operated with a right and left hand screw. Made with two tension screws, removing any back lash.
5 inches, price per pair... $1.75
Ideal and Leader Spring Dividers and Calipers, Ideal Surface Gauges, Depth Gauges, and Fine Machinists' Tools.
Illustrated catalogue free to all.
J. STEVENS ARMS & TOOL CO., P. O. Box 280, Chicopee Falls, Mass.

HOME-MADE INCUBATOR.—PRACTIcal directions for the manufacture of an effective incubator that has been carefully tested and found to perform all that may be reasonably expected; with directions for operating. With 4 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, NO. **630.** Price 10 cents. To be had at this office and from all newsdealers.

SPYGLASSES & ASTRONOMICAL TELESCOPES
ACHROMATIC OBJECTIVES EYEPIECES & LENSES. EQUATORIAL STANDS, TRANSITS, CLOCKS, CHRONOGRAPHS, &c.
SEND FOR CATALOGUE.
QUEEN & CO.
PHILA. PA.

BIT
Bores SMOOTH ROUND, OVAL, and SQUARE HOLES. Mortising Escutcheons, Core Boxes, etc. Invaluable to Carpenters, Cabinet and Pattern Makers. Received Highest Award American Institute, New York. Send $8.00 for set (3/8 to 11-8), in neat case, or 50c. for sample Bit, mailed free with Illustrated List.
BRIDGEPORT GUN IMPLEMENT CO., 17 Maiden Lane, New York.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, **59.** Price 10 cents. To be had at this office and of all newsdealers.

DROP FORGINGS.
FINISHED TOOLS
BILLINGS & SPENCER Co.
HARTFORD CONN.

PERFECTLY UNIFORM SPEED!
No matter how Changeable the Power may be.
Apply for information to
T. M. FOOTE REGULATOR CO.,
217 Franklin Street, Boston, Mass.

© 1890 SCIENTIFIC AMERICAN, INC.

Founded by Mathew Carey, 1785.

HENRY CAREY BAIRD & CO.
Industrial Publishers, Booksellers, and Importers,
810 Walnut St., Philadelphia, Pa., U. S. A.

☞ Our new and Revised Catalogue of Practical and Scientific Books, 86 pages, 8vo, and our other Catalogues and Circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.



KEEP COOL!
CLARK'S
Light-Running Ventilating
FANS.
Adapted for Ventilating and Drying of every description.
Catalogue free.
GEO. P. CLARK,
Box L, Windsor Locks, Conn.
Jas. Goldsmith, Agent, 744 B'way, New York.

TO INVENTORS AND MANUFACTURERS
59th Grand National Industrial Exposition
—OF THE—
American Institute of the City of New York
Will Open Oct. 1st and close Nov. 29, 1890.
Intending exhibitors must make early application to secure proper space and classification. For blanks and other information address GENERAL SUPERINTENDENT American Institute, 113 West 38th St., New York City.

SUBMARINE CABLES.—A PAPER by Herbert L. Webb, giving a rapid description of the more important operations connected with the manufacture and laying of a cable. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **746.** Price 10 cents. To be had at this office and from all newsdealers.

HOW TO MAKE A BREAST COLLAR, Single Harness.—Full details as to dimensions and parts required to make the collar, and directions for fitting them together. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **747.** Price 10 cents. To be had at this office and from all newsdealers.



Hoskins' Patent Hydro-Carbon
BLOW-PIPE
AND ASSAY FURNACES.
No dust. No ashes. Cheap, effective, economical, portable, and automatic.
Send for Price List.
W. Hoskins, 81 S. Clark St., Room 50, Chicago, Ill.

FAMILY ICE MACHINE Making 1 to 18 lbs. by operation. Price $10 to $185. L. Dermigny, 126 West 25th St., New York.

DIAMONDS and CARBON



For Prospecting Mining Drills, also for all kinds of Mechanical Purposes.
The subscriber is the **Pioneer** in this business, and is the Oldest Established House in the States. He only deals in first-class articles. Send for circular and prices to
J. DICKINSON,
64 Nassau Street, N. Y.

METALLIC RAILWAY TIES.—A REview of the various metallic ties that have been devised as a substitute for wooden ones upon European Railways With 6 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **748.** Price 10 cents. To be had at this office and from all newsdealers.

NUT TAPPING MACHINE.
DURRELL'S PATENT.
No. 1 Machine, 900 lb., 7 spindles.
" 2 " 1,050 " 7 "
" 2 " 600 " 3 "
Capacity of 7 Spindles, 8,000 per 10 hours.
Acknowledged to be an indispensable tool Manufactured by
WM. H. LOCK,
Buffalo, N. Y.

Cheap Printing Do it yourself. Circular press $8. Size for small newspaper, $44. Everything easy, printed rules. Send two stamps for Catalogue to factory. **KELSEY & CO., Meriden, Conn.**

FORMATION OF OZONE BY ELECtric Discharges.—An interesting review of the researches that have been made upon the production of ozone for industrial purposes through latent discharges, and the present aspect of the question. With 4 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **747.** Price 10 cents. To be had at this office and from all newsdealers.



NICKEL AND ELECTRO-PLATING APPARATUS AND MATERIAL
HANSON, VAN WINKLE & CO.
NEWARK, N.J.
92 LIBERTY ST. N.Y.

A NEW CATALOGUE OF VALUABLE PAPERS
Contained in SCIENTIFIC AMERICAN SUPPLEMENT, sent *free of charge* to any address.
MUNN & CO., 361 Broadway, New York.

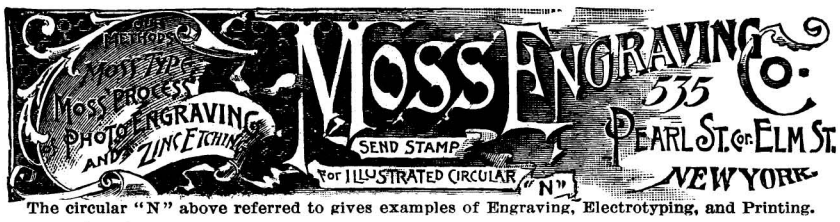

The circular "N" above referred to gives examples of Engraving, Electrotyping, and Printing.

CUTLER DESK. BEST IN THE WORLD.
A. CUTLER & SON,
BUFFALO, N.Y., U.S.A.

MARCO A. FOUSECA & CO. General Commission Agents **Bogota, Republic of Colombia.** Catalogues, price lists and correspondence solicited. Box 23.

VAN DUZEN GAS & GASOLINE ENGINE



OPERATED with COAL and OTHER MANUFACTURED GASES AND GASOLINE.
RELIABLE AND ECONOMICAL.
Fully Warranted
VAN DUZEN
Gas & Gasoline Engine Co.
53 E. 2d St., Cincinnati, O.

ON GAS ENGINES.—A VALUABLE paper by E. Delamare-Debouteville, touching upon the history of gas motors in general, and describing in detail the "Simplex" engine invented by the author and Mr. Malandin. With 23 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **715** and **716.** Price 10 cents each. To be had at this office and from all newsdealers.



Shipman Automatic Steam Engine
Oil or Natural Gas Fuel.
1, 2, 4, 6, and 8 Horse Power Single, 8, 12, and 16 Horse Power Compound
Over 2,500 in Actual Use.
Automatic in both fuel and water supply, requiring no engineer. Send for Catalogue. Mention SCI. AM.
Shipman Engine Co.,
200 Summer Street,
Boston, Mass.

Brown's Incombustible Machinery Wiping Towels are cheaper and better than "waste." Trial order $1 a doz. J. G. Bowden, Gen. Agt., 33 Kingston St., Boston, Mass.

THE PENNA. DIAMOND DRILL & MFG. CO. **BIRDSBORO, PA.,** Builders of High Class Steam Engines, Diamond Drilling and General Machinery. Flour Mill Rolls Ground and Grooved.

SHIPMAN AUTOMATIC STEAM ENGINES.
1-2-4-6-8 & 12 HORSE POWER.
OVER 2500 IN USE. MARINE AND STATIONARY. SAFE,
RELIABLE AND ECONOMICAL, REQUIRING NO SKILLED ENGINEER.
SEND 4 CENTS FOR ILLUSTRATED CATALOGUE. HAWTHORN & CO. 12 CORTLANDT ST. NEW YORK.

PULLEYS HANGERS, FRICTION CLUTCHES. PROGRESS MACHINE WORKS, A. & F. BROWN, 44 Park Place, N. Y.

TYPEWRITERS, ALL MAKES, NEW & SECOND HAND—BOUGHT, SOLD AND EXCHANGED. NATIONAL TYPEWRITER EXCHANGE. ALSO RENTED ANYWHERE IN THE U.S. 200 LASALLE ST. CHICAGO. GET OUR PRICES BEFORE BUYING. NEW CATALOGUE ON APPLICATION.



Barrel, Keg, Hogshead AND STAVE MACHINERY.
Over 50 varieties manufactured by
E. & B. HOLMES,
BUFFALO, N. Y.
Also a full line of Wood Working Machinery.
Chamfering, Howeling, and Crozing.

HAVE YOU an untried invention? Write, learn how my 35 years' successful experiments will benefit you.
J. H. JONES, 606 Church Street, Rockford, Illinois

COMPLETE STEAM PUMP
10 SIZES FROM $7 TO $75
FOR WATER SUPPLY TANKS, FIRE PUMPS & ETC.
WRITE FOR PRICES AND DESCRIPTIVE CIRCULARS
VAN DUZEN & TIFT
SOLE MAKERS
CINCINNATI, O.

GRAYS HARBOR
Washington. The Duluth of the Pacific Coast. **RAILROAD TERMINUS** of the Hunt System, now being pushed through to Grays Harbor from the Walla Walla wheat fields. Rich tributary country—wheat, coal, hay, and timber. Largest body of Government land in Washington, subject to homestead, tributary. Two-fifths of all timber in Washington tributary; the future seat of great lumber manufacturing and other industries. **THE BEST HARBOR** north of San Francisco, 18 square miles of anchorage, only 10 miles of towage; 350 miles nearer San Francisco and the world's markets than Tacoma. Possessed of unparalleled natural resources, Grays Harbor and the Grays Harbor Country offers great inducements to settlers, investors, and business men. For complete particulars address
GRAYS HARBOR COMPANY,
Grays Harbor, Washington.

THE STEAM ENGINE; ITS PRINCIples, its development, its future and perfection.—A paper by E. N. Dickerson, giving an outline of the history of the steam engine, and discussing the principles upon which it operates and which limit its capacity. With 2 figures. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **686.** Price 10 cents. To be had at this office and from all newsdealers.

GATES ROCK & ORE BREAKER

Capacity up to 150 yards per hour.
Has produced more ballast, road metal, and broken more ore than all other Breakers combined.
Send for Catalogues.
GATES IRON WORKS
50 C So. Clinton St., CHICAGO.
215 Franklin St., Boston, Mass.
44 Dey Street, New York.

UNDER THE WINDING-UP ACT.
In the matter of
THE DOMINION SAFETY BOILER CO.
Montreal, Canada.
Tenders for the purchase of the Patent Rights of the above Company for the Dominion of Canada will be received by the undersigned until noon, Monday, September 15, 1890. These patents give the exclusive right for the manufacture and sale of the **Field Sterling Water Tube Boiler** and the **Sterling Water Tube Boiler,** very extensively used in the United States and elsewhere, and are the safest and most economical steam generators in the market.
Patents may be examined and fuller particulars obtained on application to the undersigned.
JOHN McD. HAINS, *Liquidator.*
43 St. Sacrament Street.
Montreal, Aug. 27, 1890.

Barnes' New Sensitive Drill
Has These Great Advantages:
The speed of the drill spindle can be **Increased** or **Diminished Instantly,** or the motion reversed, without **stopping** the **machine** or **shifting belts.** More or less driving power can be applied to the drill spindle, as the size of the drill or the nature of the work may demand.
W. F. & JNO. BARNES CO.,
1999 Ruby St., Rockford, Ill.

RAILWAY AND STEAM FITTERS' SUPPLIES
Rue's Little Giant Injector.
SCREW JACKS, STURTEVANT BLOWERS, &c.
JOHN S. URQUHART, 46 Cortlandt St., N. Y.

WHITALL'S PLANISPHERES, or Directory of Heavens. Books, Telescopes, Heliotellus, Lunatellus, Stereopticons, etc.
WM. T. COOPER, Mgr., P. O. Box 69, Woodbury, N. J.

The First Prize of a Gold Medal awarded the "Hammond" at the Paris Exposition.

THE HAMMOND TYPEWRITER CO.
447, 449 East 52d Street,
NEW YORK, U. S. A.

ROUGH OR DRESSED SURFACES.
Ransome's Method of Finishing Concrete Walls
County Rights $50 to $500.
RANSOME & SMITH COMPANY,
230 Montgomery Street, San Francisco, Cal.

INVENTIONS PERFECTED, DETAIL DRAWINGS, PATTERNS, CASTINGS, MOULDS, MODELS, SPECIAL TOOLS, DIES, JIGS, NOVELTY AND DUPLICATE WORK. CIRCULAR SENT.
A. J. WEED & CO., 106 & 108 LIBERTY ST., NEW YORK.



THE EAGLE
THE EASIEST RUNNING BICYCLE IN THE WORLD.
Speed, Comfort and Safety.
AGENTS WANTED.
Large Illustrated Catalogue sent Free to any Address.
THE EAGLE BICYCLE MFG. CO.,
STAMFORD, CONN.

DEAFNESS & HEAD NOISES CURED by Peck's INVISIBLE **TUBULAR EAR CUSHIONS.** Whispers heard. Comfortable. Successful where all Remedies FAIL. Ills. book & proofs **free.** Address F. HISCOX, 853 Broadway, New York.

CELEBRATED PIONEER RUBBER PACKING. **SUTTON RING PACKING.** POSITIVELY ANTI FRICTION, SPECIALLY ENDORSED FOR HIGH SPEED ENGINES. SEND FOR SAMPLE PACKAGE AND PARTICULARS TO ERIE RUBBER CO ERIE PA U.S.A.

PROPOSALS.

Proposals for Lock Construction.—ENGINEER OFFICE, U. S. ARMY, Nashville, Tennessee, August 18, 1890.—Sealed proposals, in triplicate, will be received at this office until 3 P. M., Tuesday, September 23, 1890, for part construction and completion of Lock No. 1, Cumberland River, near Nashville, Tennessee. Bidders are invited to be present at opening of the bids. The United States reserves the right to reject any and all proposals. The attention of bidders is invited to the Acts of Congress, approved February 26, 1885, and February 23, 1887, vol. 23, page 332, and vol. 24, page 414, Statutes at Large. Specifications and blank forms for proposals will be furnished on application at this office.
J. W. BARLOW, *Lieut.-Col. of Engineers.*

PROPOSALS FOR IRON BRIDGE
Sealed proposals for the building of an Iron Bridge over the Mullica River on the road from New Gretna, Burlington Co., to Chestnut Neck, Atlantic Co., N. J., will be received by the joint committee of the Boards of Chosen Freeholders of said counties. All bids to be submitted on or before September 15, 1890. For specifications apply to CHARLES W. MATHIS, *Chairman,*
New Gretna, Burlington Co., N. J.

NOW READY.

Experimental Science,

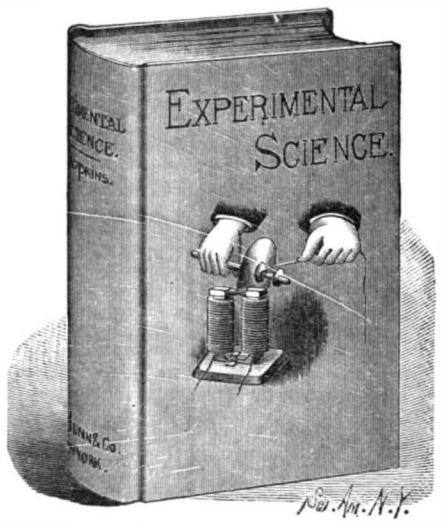

BY GEO. M. HOPKINS.
740 Pages. 680 Illustrations.
PRICE, by mail, postpaid, ... $4.00
SEND for FREE ILLUSTRATED CIRCULAR and Table of Contents.
MUNN & CO., Publishers,
Office of The Scientific American,
361 Broadway, New York.

2nd MACHINERY Lists Sent.
N. Y. Mach'y Depot, Bridge Store 16. Frankfort St., N.Y.

PATTERNS FOR SALE
Entire contents of Pattern House of Foundry and Machine Shop, of capacity of 100 men, patterns being brass, iron, and wood, and having cost upwards of $12,000.
Consisting in part of a line of builders' hardware, window weights, chimney caps, stable furniture, hitching posts, balconies, fire escapes, stairs, brackets, fences, coal hole covers, sewer and water works, lamp posts, opera and school house chairs and fixtures, work benches, vases, bouquet holders, cemetery and park work, fountains, lathes, planers, gearing, hangers, boxes, couplings, flanges, washers, boiler fixtures, grates, balance and wheelbarrow wheels, sled shoes, ladles, pins and plates for flasks, as well as a large assortment of other patterns. **Full examination solicited.**
Price nominal, as compared with their cost and worth. This presents an opportunity for the purchase of a stock of patterns seldom presented. Address
S. C. Forsaith Machine Co., Manchester, N. H.

FOR SALE CHEAP
One No. 10 **Sturtevant Exhaust Blower,** with 13 inch pulley, 11 inch face, 24 inch side opening—left hand. In use but a short time. Address
THE GREENWAY BREWING CO., Syracuse, N. Y.

WANTED.—Superintendent for Architectural Iron Works, with executive ability and experience. State reference and experience. A mechanical engineer preferred. Apply to S. H. Parvin's Sons, Cincinnati, O.

The Scientific American

PUBLICATIONS FOR 1890.

The prices of the different publications in the **United States, Canada, and Mexico are as follows.**

RATES BY MAIL.

The Scientific American (weekly one year	$3.00
The Scientific American Supplement (weekly), one year.	5.00
The Scientific American, Spanish Edition (monthly) one year.	3.00
The Scientific American, Architects and Builders Edition (monthly), one year.	2.50

COMBINED RATES.

The Scientific American and Supplement,	$7.00
The Scientific American and Architects and Builders Edition,	5.00
The Scientific American, Supplement, and Architects and Builders Edition,	9.00

Proportionate Rates for Six Months.

This includes postage, which we pay. Remit by postal or express money order, or draft to order of
MUNN & CO., 361 Broadway, New York.



THE BACKUS WATER MOTOR.
With or without Governor. Supplies from hydrant pressure the cheapest power known. Invaluable for blowing church organs, running printing presses, sewing machines, lathes, saws, coffee mills, fans, sausage cutters, elevators, and all machinery requiring light power. No firing, no fuel, no ashes, no repairs, noiseless and compact. No extra insurance. Always ready. Supplies from ⅛ to 10 H. P. Interchangeable jets and improved in every detail. *References in all parts of the country.*

THE BACKUS EXHAUST FAN.
A Wonderful Air Mover. For Drying all kinds of goods (special Dryers built and results guaranteed). Invaluable in Bleacheries, Dye Houses, Hat Shops, Acid and Paint Works, Woolen and Cotton Mills, for removing steam, dust, smoke, hot air, acid fumes, bad odors, and for ventilating Hotels, Laundries, Public Buildings, etc. *High Speed Engine and Fan combined.*



Send for special circulars to the Backus Water Motor Co., Newark, N. J.

WORKING MODELS & LIGHT MACHINERY. INVENTIONS DEVELOPED. Send for Model Circular. Jones Bros. E Co., Cin'ti. O.

© 1890 SCIENTIFIC AMERICAN, INC.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.

The above are charges per agate line--about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

★ ONE STAR HACK SAW WILL DO AS MUCH WORK AS FIVE OF ANY OTHER KIND.—N. B. ★

The Montauk CAMERA



Is compact and neat, covered with seal leather, supplied with double rapid rectilinear lens. Takes snap shots, interiors, exteriors, houses, groups, etc. Size of picture, 4x5 inches.

For full description, send to

G. GENNERT,
56 East 10th Street, New York.

Victor Bicycles!



For pleasure, business, recreation, and for anything you could use a bicycle for.

VICTORS ARE BEST!

Send for catalogue.

Overman Wheel Co., Makers,
Chicopee Falls, Mass.

Vinita Planing Mill.

Engine was Set Up and Started by our Printed Directions.

VINITA, IND. TER., June 21, 1890.

Charter Gas Engine Co., Sterling, Ill.

DEAR SIRS:—My No. 4 Gasoline Engine gives entire satisfaction thus far, and I see no reason why it should not continue to do so. The engine was set up and started in less than ten hours after being put in shop, according to your printed directions accompanying same. A great many people come to see it and all express their surprise, but all acknowledge it to be a dandy.

Yours respectfully, R. D. KNIGHT.

For Circulars, etc., address CHARTER GAS ENGINE CO., P. O. Box 148, STERLING, ILL.



COMPTOMETER

(TRADE MARK.)

ALL ARITHMETICAL ....PROBLEMS

Solved rapidly and accurately by using the COMPTOMETER. Saves **40 per cent.** of time. Entire relief from mental strain. Adapted to all commercial and scientific computations. Send for circular.

FELT & TARRANT MFG. CO., 52-56 Illinois St., Chicago.

ADAPTATION OF THE STEAM Machinery in Marine Construction.—A lecture by Chas. E. Emery Ph.D., delivered in the Sibley College Course. An interesting discussion of steam engineering practice as applied to ships, with a comparison of the performance of seagoing vessels of different sizes, operating under different conditions. With 7 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **733** and **734**. Price 10 cents each. To be had at this office and from all newsdealers.

NEW KODAKS



"You press the button, we do the rest."

Seven New Styles and Sizes

ALL LOADED WITH

Transparent Films.

For sale by all Photo. Stock Dealers.

THE EASTMAN COMPANY,

Send for Catalogue. *ROCHESTER, N. Y.*

Steam! Steam!

Quality Higher, Price Lower.

For Strictly Cash, Complete Fixtures except Stack.

2-Horse Eureka Boiler and Engine, - $135
4- " " " " " - - 210

Other sizes at low prices. Before you buy get our prices.

B. W. PAYNE & SONS,
Drawer 56. ELMIRA, N. Y.

MALLEABLE AND FINE GRAY IRON ALSO STEEL CASTINGS FROM SPECIAL PATTERNS FINE TINNING JAPANNING AND FINISHING
THOMAS DEVLIN & CO. LEHIGH AVE. & AMERICAN ST. PHILA.

PATENTS!

MESSRS. MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had *forty-one years' experience*, and now have *unequaled facilities* for the preparation of Patent Drawings, Specifications, and the prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very reasonable terms.

A pamphlet sent free of charge, on application, containing full information about Patents and how to procure them; directions concerning Labels, Copyrights, Designs, Patents, Appeals, Reissues Infringements, Assignments, Rejected Cases. Hints on the Sale of Patents, etc.

We also send, *free of charge*, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world.

MUNN & CO., Solicitors of Patents,
361 Broadway, New York.

BRANCH OFFICES.—No. 622 and 624 F Street, Pacific Building, near 7th Street, Washington, D. C.

THE BRIDGEPORT WOOD FINISHING CO

G. M. BREINIG, AGENT, PRINCIPAL OFFICE AT MANUFACTORY NEW MILFORD, CONN.
NEW YORK OFFICE, 240 PEARL ST.
CHICAGO OFFICE & WAREHOUSE 211 EAST RANDOLPH
MANUFACTURERS OF

WHEELERS PATENT WOOD FILLER,
BREINIGS LITHOGEN SILICATE PAINT
LITHOGEN PRIMER, WOOD STAINS
SILEX FLINT AND FELDSPAR.

PAMPHLET GIVING DIRECTIONS FOR FINISHNG HARD WOOD FREE TO ANY ADDRESS.

THE PHONOGRAPH.—A DETAILED description of the new and improved form of the phonograph just brought out by Edison. With 8 engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **632**. Price 10 cents. To be had at this office and from all newsdealer.



The HARTFORD SAFETY

THE BEST $100 BICYCLE MADE.

Can be adjusted to fit any person, from a boy of 12 to a full-grown man.

Catalogue Free.

HARTFORD CYCLE CO., Hartford, Conn.

THE ONLY PRACTICAL LOW-PRICED $15 TYPEWRITER

Catalogue free. Address Typewriter Department, **POPE MFG. CO.**, Boston, New York, Chicago.

SEAMLESS BRASS & COPPER TUBES. SHEET BRASS BRASS WIRE FINE TOOLS TAPS 175 177 LAKE ST. CHICAGO SEND FOR CATALOGUE

NEW YORK BELTING AND PACKING CO.

JOHN H. CHEEVER, Treas. **15 PARK ROW, New York.**

OLDEST and LARGEST Manufacturers in the United States of



VULCANIZED RUBBER FABRICS
For Mechanical Purposes.

RUBBER BELTING,
Packing, and Hose.
Rubber Mats, Matting, and Stair Treads.



Rubber Pump Valves, Bicycle Tires, Tubing, Tennis Soling.
Rubber Cement, Cord, Gaskets, Diaphragms.
Rubber Rings, Rolls, Car Springs, Washers.
VULCANITE EMERY WHEELS. **Rubber Sheets, Strips, Saw Bands, Stopples.**

SALESROOMS:—Philadelphia, 308 Chestnut St.; Boston, 52 Summer St.; Chicago, 151 Lake St.; Minneapolis, 28 South 2d St.; Cleveland, 176 Superior St.; San Francisco, 17 Main St.; Detroit, 16-24 Woodward Ave.
European Branch, Pickhuben 5 Hamburg (Freihafengebiet) Germany.

THE FRED'K CRANE CHEMICAL CO.
SHORT HILLS, N. J.-BOX 91A-
ZAPONS, BRUSH & DIP. LACQUERS. VARNISH. SHELLACS. BLACKS. BRILLIANT & DEAD. JAPANS AIR DRYING. ENAMELS. TRANSPARENT. FOR METAL AND WOOD. PROOF AGAINST ACIDS AND ALKALIES. —WRITE FOR CATALOGUE.—

Scientific Book Catalogue

RECENTLY PUBLISHED.

Our new catalogue containing over 100 pages, including works on more than fifty different subjects. Will be mailed free to any address on application.

MUNN & CO., Publishers Scientific American,
361 Broadway, New York.


VAN DUZEN'S
LOOSE · PULLEY · OILER
IS A GRAND SUCCESS, THE PROOF IS IMITATORS ARE MAKING OILERS WHICH ARE INFRINGEMENTS ON OUR PATENTS
VAN DUZEN & TIFT
Write for Catalogue. CIN'TI O.
VAN DUZEN & TIFT CIN, O.

THE AMERICAN BELL TELEPHONE CO.

95 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent granted to Alexander Graham Bell, March 7th, 1876, No. 174,465, and January 30th, 1877, No. 186,787.

The transmission of Speech by all known forms of Electric Speaking Telephones infringes the right secured to this Company by the above patents, and renders each individual user of telephones not furnished by it or its licensees responsible for such unlawful use, and all the consequences thereof, and liable to suit therefor.

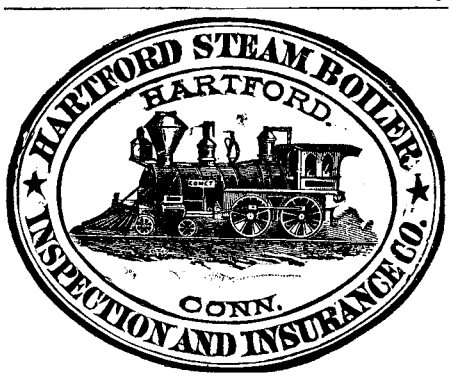

THOMAS ALVA EDISON.—A BIOgraphical sketch of the great inventor, with full-page portrait from a recent photograph. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **746**. Price 10 cents To be had at this office and from all newsdealers.

SAWS Wanted 50,000 Sawyers and Lumbermen to send us their full address for a copy of Emerson's 🖙 Book of **SAWS**, new 1890 edition. We are first to introduce NATURAL GAS for heating and tempering **Saws** with wonderful effect upon improving their quality and toughness, enabling us to reduce prices. Address **EMERSON, SMITH & CO. (Ltd.), Beaver Falls, Pa.** **SAWS**

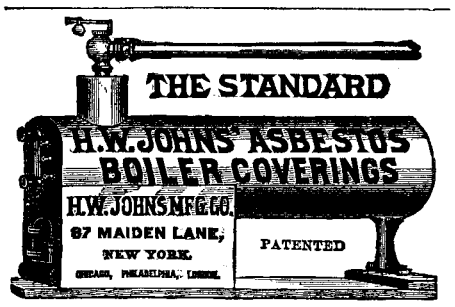

ALUMINUM BRONZE AND BRASS as a suitable material for Propellers.—A paper by Eugene H. Cowles, discussing the various materials that have been used in the construction of propeller wheels, and giving the details of government tests made of numerous aluminum bronzes and brasses. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. **745**. Price 10 cents. To be had at this office and from all newsdealers.

WIRE ROPE

Address JOHN A. ROEBLING'S SONS, Manufacturers, Trenton, N. J., or 117 Liberty Street, New York.

Wheels and Rope for conveying power long distances. Send for circular.

NATIONAL STEEL TUBE CLEANER

RANKS THE HIGHEST
Endorsed by the best Engineers.
CHALMERS-SPENCE CO.
Office, 59 Liberty Street,
Works, 419-425 E. Eighth St., New York

FLORIDA STEAM AND HOT WATER HEATERS.

FOR WARMING RESIDENCES, STORES, HOTELS, BUSINESS BLOCKS, SCHOOLS AND PUBLIC BUILDINGS BY STEAM OR HOT WATER CIRCULATION. POSITIVELY NO EXPLOSION. MICAL MAGAZINE FEED. SEND FOR NEW ... PIERCE & PIERCE MFG. CO. SYRACUSE, NEW YORK, U.S.A.

SYRACUSE MALLEABLE IRON WORKS

W. B. BURNS PROP'R

THE TEACHING OF SCIENCE.—Report of the British Association Committee appointed for the purpose of inquiring into and reporting upon the present methods of teaching chemistry. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, Nos. **734** and **735**. Price ten cents each. To be had at this office and from all newsdealers.

THE GRAVES ELEVATORS.

PASSENGER & FREIGHT L. S. GRAVES & SON ROCHESTER N.Y.
NEW YORK BOSTON ST. LOUIS DETROIT

JENKINS BROS. VALVES!

JENKINS BROS., 71 John St., N. Y.; 105 Milk St., Boston; 21 North 5th St., Phila.; 54 Dearborn St., Chicago.

Remington Standard Typewriter



GOLD MEDAL—PARIS EXPOSITION, 1889.

Wyckoff, Seamans & Benedict
327 BROADWAY, NEW YORK.

THE

Scientific American

ESTABLISHED 1846.

The Most Popular Scientific Paper in the World.

Only $3.00 a Year, including Postage. Weekly. 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete List of Patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States, Canada or Mexico, on receipt of **three dollars** by the publishers; six months, $1.50; three months, $1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

MUNN & CO.,
361 Broadway, New York.

THE

Scientific American Supplement.

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers, and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archæology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States and Canada, $5.00 a year, or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year for $7.00. Single copies 10 cents. Address and remit by postal order, express money order, or check,

MUNN & Co., 361 Broadway, N. Y.,
Publishers SCIENTIFIC AMERICAN.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. $2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming a large and splendid **Magazine of Architecture**, richly adorned with *elegant plates in colors*, and with other fine engravings; illustrating the most interesting examples of modern Architectural Construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country, including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with full Plans, Specifications, Sheets of Details, Estimates, etc.

The elegance and cheapness of this magnificent work have won for it the **Largest Circulation** of any Architectural publication in the world. Sold by all newsdealers. $2.50 a year. Remit to

MUNN & CO., Publishers,
361 Broadway, New York.

PRINTING INKS.

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK, Tenth and Lombard Sts., Phila., and 47 Rose St., opp. Duane St., N. Y.

© 1890 SCIENTIFIC AMERICAN, INC.